



NANOLED LIGHTING

It is a brand of Tecnocavi Service srl
61021 Carpegna (PU) via Pian dei Roghi, 32
Tel. + 39 0722 77418
info@nanoledlighting.com
www.nanoledlighting.com



NANOLED LIGHTING has dedicated a series of specific and approved products for proper storage to the fascinating world of wine and champagne. Exposure to light has always conditioned the life of wine, from its birth, on the rows of vines, to the bottle. The light spectrum interacts directly with all the cells and atoms that make up matter. This process is triggered by both visible light, which are the colours of the spectrum that we see, and invisible light, of which UV (ultraviolet) and IR (infrared) are part.

Since ancient times, mankind has known that prolonged exposure of wine to light is harmful and conservation methods have always taken this into account. Closed amphorae were used, perhaps buried or kept in the cellar, as in the present day. The study of the colour of the bottles is also very wide-ranging; there are transparent, yellow, green and amber bottles. This means that knowledge and technique have made many steps forward and the quality of the wines on offer has increased a lot, so innovative solutions in production, distribution and storage have been devised.

Important studies by oenologists and specialists have highlighted a defect that emerges when wines, especially whites or rosés, produced with the classic or champenoise method are exposed to light. This phenomenon is also known as 'Light Strike' or 'Goût de Lumière' in French and gives champagne and wine an unpleasant smell and aftertaste that tastes like wool or boiled cabbage. The cause is the alteration of riboflavin and amino acids in wines exposed to light, which compromises the taste of important products from the Collio, Franciacorta, Langhe Piemontese and especially French wines from the Champagne production area (Montagne de Reims, Côte des Bancs, Vallée de la Marne, Côte de Sézanne and Aube).

The only solution is to prevent the 'Light Strike' through proper storage in properly lit cellars or rooms. Through its 'AMBRA VINO LEDs' NANOLED LIGHTING has obtained the only approval recognised as suitable for this purpose from the Interprofessional Committee for Champagne Wines (CIVIC). The committee has indeed certified that our 'AMBRA VINO LEDs' totally exclude the photometric spectrum so harmful to wine.

NANOLED LIGHTING has selected a collection of products to be included in specific and especially correct projects and installations for the storage and tasting of champagne and wine.

You will find our AMBRA VINO LED symbol next to each product in the Lighting Catalogue 2025 Ed.02 and on www.nanoledlighting.com



AMBRA VINO LED

Compliant with the standards of the

Comité Interprofessionnel du vin de Champagne

(CIVIC)





INDEX BY PRODUCT FAMILY

MICROSPOT		PROJECTORS	
HALLEY	12	DUVAR	46
INDOOR FLUSH FITTINGS		VERTIGO	47
INDOON FLOSH FITTINGS		ZEPPELIN	48
MINI VESTA	16	DECORATIVE TECHNICAL	
EOS			
EOS Q	18	LIGHTING	
EOS CEILING LIGHT	19	PIXEL 1	52
EOS METAL	20	EVA	53
EOS METAL Q	21	REM	54
BASIK 1	22	CISO P31 CEILING LIGHT	55
BASIK Q	23	CISO P33 CEILING LIGHT	56
BIONIK 1	24	CISO S31 PENDANT LIGHT	57
BIONIK Q	25	CISO S33 PENDANT LIGHT	58
FOUR HOLE	26	CEILING ROSES FOR OTHER CISO COMPOSITIONS	59
FOUR HOLE Q	27	INCTALLATION ACCECCODICC	
INDOOR AND OUTDOOR		INSTALLATION ACCESSORIES	
		HOLLY, HALISSA AND MEMO FORMWORK	62
RECESSED LIGHTS		ACSO SERIES FORMWORK	62
HOLLY	30	ACSO SERIES RING	62
HALISSA	31	DEHO AND DARDO SERIES FORMWORK	63
МЕМО	32	DEHO AND DARDO SERIES RING	63
DEHO 2	33	DUVAR BASE AND STAKE	63
DEHO 3	34		
DEHO 4	35		
DEHO 5	36		
DEHO Q	37		
DARDO 2	38		
DARDO 3	39		
DARDO Q	40		
ACSO 1	41		
ACSO 2	42		
ACSO 3	43		



ALPHABETICAL INDEX

A		E	
ACSO 1	41	EOS	17
ACSO 2	42	EOS METAL	20
ACSO 3	43	EOS METAL Q	21
ACSO SERIES FORMWORK	62	EOS CEILING LIGHT	19
ACSO SERIES RING	62	EOS Q	18
В		EVA	53
DUVAR BASE AND STAKE	63	F	
BASIK 1	22	FOUR HOLE	26
BASIK Q	23	FOUR HOLE Q	07
BIONIK 1	24		
BIONIK Q	25	Н	
С		HALISSA	31
U		HALLEY	12
CEILING ROSES FOR OTHER CISO COMPOSITIONS	59	HOLLY	30
CISO P31 CEILING LIGHT	55	HOLLY, HALISSA AND MEMO FORMWORK	62
CISO P33 CEILING LIGHT	56	8.4	
CISO S31 PENDANT LIGHT	57	M	
CISO S33 PENDANT LIGHT	58	MEMO	32
D		MINI VESTA	16
DARDO 2	38	P	
DARDO 3	39	PIXEL 1	52
DARDO Q	40		
DEHO 2	33	R	
DEHO 3	34	DEM	54
DEHO 4	35	REM	
DEHO 5	36	V	
DEHO AND DARDO SERIES FORMWORK	63	MEDTICO	47
DEHO AND DARDO SERIES RING	63	VERTIGO.	47
DEHO Q	37	Z	
DUVAR BASE AND STAKE	63	-	40
DUVAR	46	ZEPPELIN	48

SYMBOLS



Product compliant with European Electrical Safety Regulations.



Product subject to European WEEE regulations on disposal of items.



Product made with recyclable materials.



Category III Products powered by safety voltage below 50V.



Ingress Production (see below).



Product that can be installed both indoors and outdoors.



Product that can be installed indoors.



Indicates the theoretical weight of the product, without wiring.



Product suitable for mounting on normally flammable surfaces.



It means that the "wine"Amber color avoid the "taste of light". Suggest and approved by the Comité Interprofessionnel du vin de Champagne (CIVIC) for the lighting of cellars, storage rooms and furnishings.



Product that can be inserted in furniture.



Indicates that the product can be walked on.



Indicates the type of optics (symmetrical or asymmetrical) and the degrees of aperture.



Size of hole to be drilled for mounting without formwork.



Indicates that the product can be dimmed.



Class I. Lighting system with earthing device.



Category II Lighting system with reinforced or double insulation, without earthing device.



Can be switched on by touching the metal surface.



Compliance with the RoHs Directive 2002/95/EC that bans the use of hazardous substances in electrical and electronic equipment (lead, mercury, etc.)

INGRESS PROTECTION IP..

The 'resistance' offered by the device to penetration by solids and liquids is indicated by the prefix IP (international protection) followed by two significant numbers. The first number identifies the degree of protection against the ingress of solids. The second number identifies the degree of protection against the ingress of liquids.

IPO_ Unprotected.

IP1 Protected against a solid object greater than 50 mm.

IP2. Protected against a solid object greater than 12 mm.

P3 Protected against a solid object greater than 2.5 mm.

P4. Protected against a solid object greater than 1 mm.

IP5. Protected against ingress of dust.

IP6. Completely protected against ingress of dust.

P.0 Unprotected.

Protected against vertical dripping water.

Protected against vertical dripping water when tilted up 15°.

P.3 Protected against rain.

P4 Protected against vertical splashing.

P.5 Protected against jets of water.

P.6 Protected against waves.

IP.7 Protected against effects from temporary immersion.







MICROSPOT

HALLEY 12

HALLEY

L31.





Flush-fitted in polished aluminium for accent, decoration and courtesy lighting. Also indicated for 'starry sky'. Choice of secondary optics, can be installed indoors and outdoors if partially protected, spring-mounted.

Power LED CRI>80 Power: 0,8W@350mA Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



60°

25°

MADE IN ITALY


























Code example:

HALLEY + White + 40° light beam + "Wine" Amber = Code: L31.140AM







INDOOR FLUSH FITTINGS

MINI VESTA	16
EOS	17
EOS Q	18
EOS CEILING LIGHT	19
EOS METAL	20
EOS METAL Q	21
BASIK 1	22
BASIK Q	23
BIONIK 1	24
BIONIK Q	25
FOUR HOLE	26
FOLIR HOLF O	27

MINI VESTA







Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY **L9X.** 500mA • 120° **L9X.** 350mA Ø24 • Ø24 27 10,5 Ø30 Ø30 BASIC CODES **FINISHES** LIGHT BAND LED COLOUR **POWER** "Wine" Amber L9X. __ 1 White **00** 120° MA 3 1x0.8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm 6 Chrome Approved by **7** Brushed aluminium CIVIC **8** Transparent

Code example:

MINI VESTA + White + 120° light beam + "Wine" Amber + 0,8W = Code: L9X.100AM3

EOS L95.





Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY **L95.** 500mA • 15° 25° 40° 60° 80° **L95.** 350mA Ø24 • Ø24 35 Ø32 Ø32 BASIC CODES **FINISHES** LIGHT BAND LED COLOUR **POWER** AM "Wine" Amber L95. __ 1 White **15** 15° 3 1x0.8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm 2 Matt black **25** 25° Approved by **3** Brushed gold **40** 40° CIVIC**6** Chrome **60** 60° **7** Brushed aluminium **80** 80° **8** Transparent 9 Polished gold

Code example:

EOS + Brushed aluminium + 15° light beam + "Wine" Amber + 0.8W =Code: L95.715AM3

EOS Q







Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY **L9Q.** 500mA • 15° 25° 60° 80° **L9Q.** 350mA Ø24 \odot Ø24 35 30x30 30x30 BASIC CODES **FINISHES** LIGHT BAND LED COLOUR **POWER** AM "Wine" Amber _ 1 White **15** 15° 3 1x0.8W - 350mA - 50 lm L9Q. **5** 1x1,2W - 500mA - 70 lm 2 Matt black **25** 25° Approved by **3** Brushed gold **40** 40° CIVIC**6** Chrome **60** 60° **7** Brushed aluminium **80** 80° **8** Transparent 9 Polished gold

Code example:

EOS Q + Brushed aluminium + 15° light beam + "Wine" Amber + 0.8W = Code: L9Q.715AM3

EOS CEILING LIGHT







Thermoplastic ceiling light for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, mounting with concealed screws.

Power LED CRI>80 Power: 0,8W@350mA Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY



































BASIC CODES

L95D.

FINIS	HES	LIG	HT BA	ND
□ 1	White		15	15°
2	Matt black		25	25°
3	Brushed gold		40	40°
Ⅲ 6	Chrome		60	60°
7	Brushed aluminium		80	80°
8	Transparent			

LED COLOUR

AM "Wine" Amber Approved by CIVIC

Code example:

EOS CEILING LIGHT + Brushed aluminium + 25° light beam + "Wine" Amber = Code: L95D.725AM

9 Polished gold

EOS METAL







Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors. Flush-mounted with springs.

Power LED CRI>80 Power: 1,2W@500mA Lumen: 70Lm@500mA

500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY





























Code example:

EOS METAL + Brushed aluminium + 40° light beam + "Wine" Amber = Code: L95M.740AM

EOS METAL Q







Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors. Flush-mounted with springs.

Power LED CRI>80 Power: 1,2W@500mA Lumen: 70Lm@500mA

500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY



























L95QM.

BASIC CODES



LED COLOUR



Code example:

EOS METAL Q + Brushed aluminium + 40° light beam + "Wine" Amber = Code: L9QM.740AM

BASIK 1

L01.





Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY 15° BASIC CODES **FINISHES** LIGHT BEAM LED COLOUR **POWER** _ 1 White **15** 15° AM "Wine" Amber 3 3x0,8W - 350mA - 150 lm L01. 5 3x1,2W - 500mA - 210 lm 2 Matt black **25** 25° Approved by **5** Gloss aluminium **35** 35° CIVIC**6** Chrome **7** Brushed aluminium

Code example:

BASIK 1 + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L01.715AM3

BASIK Q







Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY 15° BASIC CODES **FINISHES** LIGHT BEAM LED COLOUR **POWER** _ 1 White **15** 15° AM "Wine" Amber 3 3x0,8W - 350mA - 150 lm L02. 5 3x1,2W - 500mA - 210 lm 2 Matt black **25** 25° Approved by **5** Gloss aluminium **35** 35° CIVIC**6** Chrome **7** Brushed aluminium

Code example:

BASIK Q + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L02.715AM3

BIONIK 1

L21.





Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY • Ø42 15° 25° 66 Ø58 BASIC CODES **FINISHES** LIGHT BEAM LED COLOUR **POWER** _ 1 White **15** 15° AM "Wine" Amber 3 3x0,8W - 350mA - 150 lm L21. 5 3x1,2W - 500mA - 210 lm 2 Matt black **25** 25° Approved by **5** Gloss aluminium **35** 35° CIVIC**6** Chrome **7** Brushed aluminium

Code example:

BIONIK 1 + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L21.715AM3

BIONIK Q







Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY • Ø42 15° 66 52x52 BASIC CODES **FINISHES** LIGHT BEAM LED COLOUR **POWER** _ 1 White **15** 15° AM "Wine" Amber 3 3x0,8W - 350mA - 150 lm L22. 5 3x1,2W - 500mA - 210 lm 2 Matt black **25** 25° Approved by **5** Gloss aluminium **35** 35° CIVIC**6** Chrome **7** Brushed aluminium

Code example:

BIONIK Q + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L22.715AM3

FOUR HOLE

L24.





Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.


Power LED CRI>80

Power: 3,2W@350mA – 4,8W@500mA Lumen: 200Lm@350mA – 280Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY

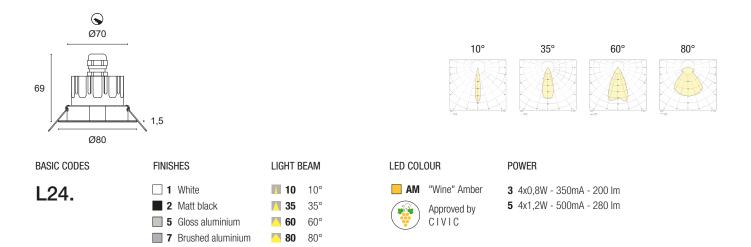

Code example:

FOUR HOLE + White + 80° light beam + "Wine" Amber + 3,2W = Code: L24.180AM3

FOUR HOLE Q







Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80

Power: 3,2W@350mA - 4,8W@500mA Lumen: 200Lm@350mA - 280Lm@500mA 350mA - 500mA constant current power supply


Series connection, 50 cm cable



MADE IN ITALY • Ø70 10° 35° 60° 80° 90x90 BASIC CODES **FINISHES** LIGHT BEAM LED COLOUR **POWER** _ 1 White **10** 10° AM "Wine" Amber 3 4x0,8W - 350mA - 200 lm L25. **5** 4x1,2W - 500mA - 280 lm 2 Matt black **35** 35° Approved by **5** Gloss aluminium **60** 60° CIVIC**7** Brushed aluminium **80**

Code example:

FOUR HOLE Q + White + 80° light beam + "Wine" Amber + 3.2W = Code: L25.180AM3

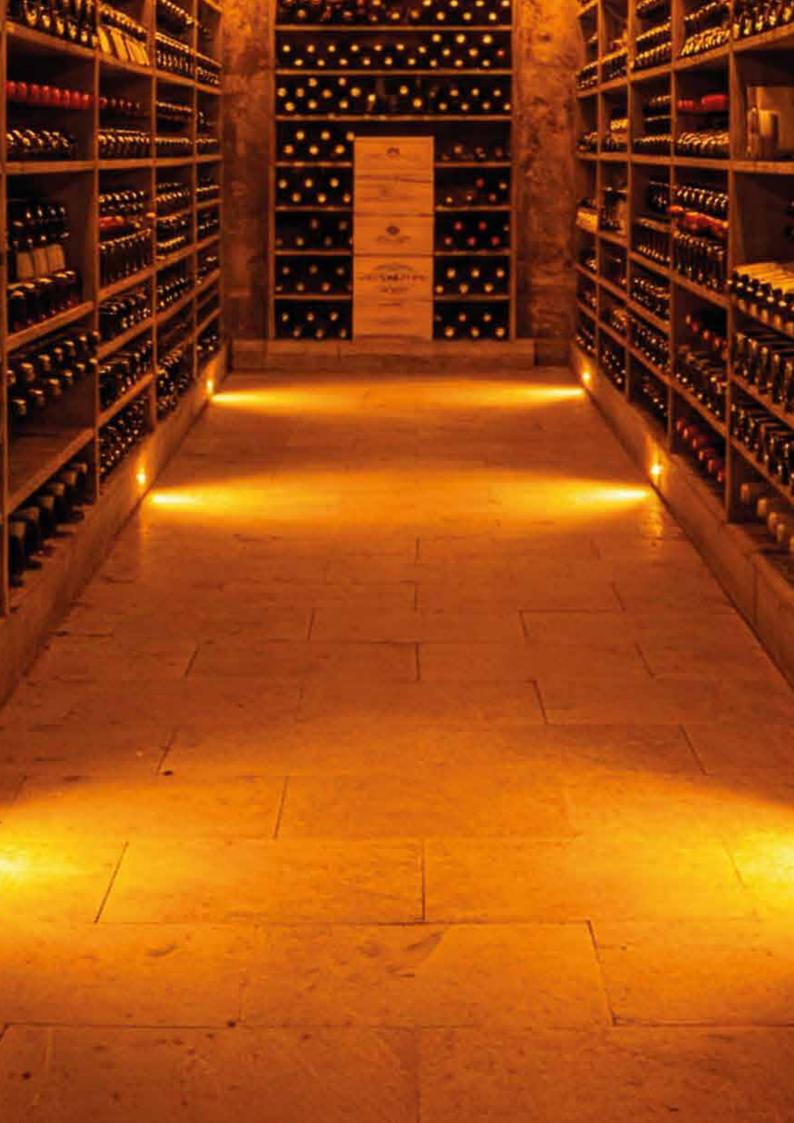




INDOOR AND OUTDOOR RECESSED LIGHTS

HOLLY	30
HALISSA	31
MEMO	32
DEHO 2	33
DEHO 3	34
DEHO 4	35
DEHO 5	36
DEHO Q	37
DARDO 2	38
DARDO 3	39
DARDO Q	40
ACSO 1	41
ACSO 2	42
ACSO 3	43

HOLLY

L30R.



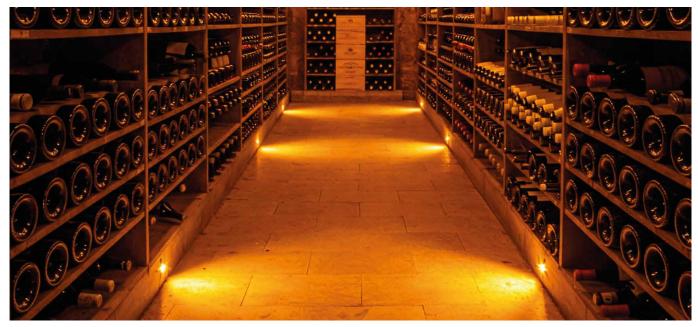

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork.

Power LED CRI>80 Power: 0,8W@350mA Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY 25° BASIC CODES LIGHT BEAM **GLASS** LED COLOUR AM "Wine" Amber L30R. **25** T Transparent **S** Brushed **40** 40° Approved by **60** 60° CIVIC

Code example:

 $HOLLY + 25^{\circ}$ light beam + Transparent glass + "Wine" Amber = Code: L30R.25TAM

HALISSA







Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork.

Power LED CRI>80 Power: 0,8W@350mA Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY 25° I 2,9 20x20 BASIC CODES LIGHT BEAM **GLASS** LED COLOUR AM "Wine" Amber L30Q. **25** 25° T Transparent **S** Brushed **40** 40° Approved by **60** 60° CIVIC

Code example:

MEMO

L30S.





Flush-fitted in polished 304 stainless steel with power LED for decoration, courtesy or step marker lighting. Diffuse lighting with anti-glare cowling. Can be fitted in the wall or floor, indoors and outdoors.

Mounting with formwork.

Power LED CRI>80 Power: 0,8W@350mA Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable




120°

Code example:

MEMO + Radial light beam 1 aperture + Transparent glass + "Wine" Amber = Code: L30S.R1TAM

L402.



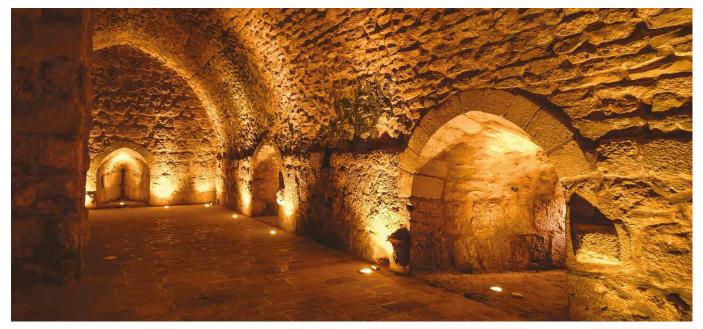

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY • Ø32 15° 60° 80° 62 1,4 BASIC CODES LIGHT BEAM **GLASS** LED COLOUR **POWER** L402. 15° T Transparent AM "Wine" Amber 3 1x0.8W - 350mA - 50 lm **15 S** Brushed **5** 1x1,2W - 500mA - 70 lm **25** 25° Approved by CIVIC **40** 40° 60° 80 80°

Code example:

DEHO 2 + 25° light beam + Transparent glass + "Wine" Amber + 0,8W = Code: L402.25TAM3

L403.





Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable





Code example:

DEHO 3 + Radial light beam 1 aperture + "Wine" Amber + 0.8W = Code: L403.R1AM3

L404.





Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.


Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



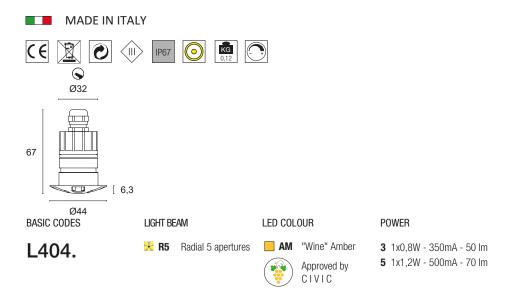

Code example:

DEHO 4 + Radial light beam 5 apertures + "Wine" Amber + 0.8W = Code: L404.R5AM3

L402B





Flush-fitted in polished 304 stainless steel for decoration, courtesy and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.


Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



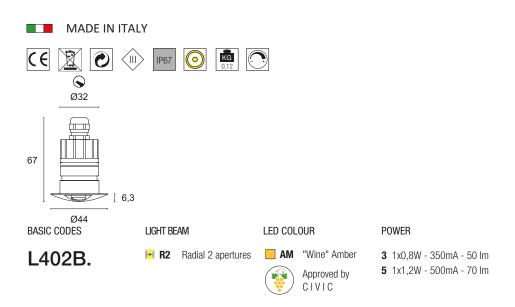

Code example:

DEHO 5 + Radial light beam 2 apertures + "Wine" Amber + 0,8W = Code: L402B.R2AM3

DEHO Q

L405.





Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50Lm@350mA - 70Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY ((• Ø32 15° 60° 80° 1,8 44x44 BASIC CODES LIGHT BEAM **GLASS** LED COLOUR **POWER** L405. 15° T Transparent AM "Wine" Amber 3 1x0,8W - 350mA - 50 lm **15 S** Brushed **5** 1x1,2W - 500mA - 70 lm **25** 25° Approved by **40** 40° CIVIC60° 80 80°

Code example:

DEHO Q + 25° light beam + Transparent glass + "Wine" Amber + 0,8W = Code: L405.25TAM3

DARDO 2








Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



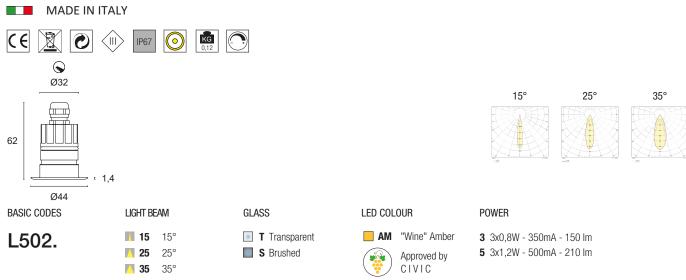

Code example:

DARDO 2 + 15° light beam + Transparent glass + "Wine" Amber + 2.4W = Code: L502.15TAM3

DARDO 3







Flush-fitted in polished 304 steel with powerful LEDs suitable for decorative lighting and as step markers. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable





Code example:

DARDO 3 + Radial light beam 5 apertures + "Wine" Amber + 2,4W = Code: L503.R5AM3

DARDO Q

L504.





Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY < € • Ø32 15° 25° 62 1,4 44×44 **POWER** BASIC CODES LIGHT BEAM **GLASS** LED COLOUR **15** 15° T Transparent BN 4000K 3 3x0,8W - 350mA - 150 lm L504. **S** Brushed BC 3000K 5 3x1,2W - 500mA - 210 lm **25** 25° CC 2700K **35** 35° **BL** Blue VE Green R0 Red AM "Wine" Amber Approved by

Code example:

DARDO Q + 15° light beam + Transparent glass + "Wine" Amber + 2,4W = Code: L504.15TAM3

40 www.nanoledlighting.com

CIVIC

ACSO₁

L601.





Polished 304 steel recessed light with power LEDs for primary floor lighting of green areas and architectural facades. Choice of secondary optics. Can be flush fitted indoors and outdoors Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 3,2W@350mA - 4,8W@500mA Lumen: 200m@350mA - 280Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY • Ø60 10° 35° 60° 80° 70 Ø80 BASIC CODES LIGHT BEAM **GLASS** LED COLOUR **POWER** L601. 10 10° T Transparent AM "Wine" Amber 3 4x0,8W - 350mA - 200 lm **S** Brushed **5** 4x1,2W - 500mA - 280 lm **35** 35° Approved by CIVIC **60** 60° **80** 80°

Code example:

ACSO 1 + 35° light beam + Transparent glass + "Wine" Amber + 3,2W = Code: L601.35TAM3

ACSO 2

L602.






Flush-fitted in polished 304 stainless steel with power LED for accent and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 3,2W@350mA - 4,8W@500mA Lumen: 200m@350mA - 280Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



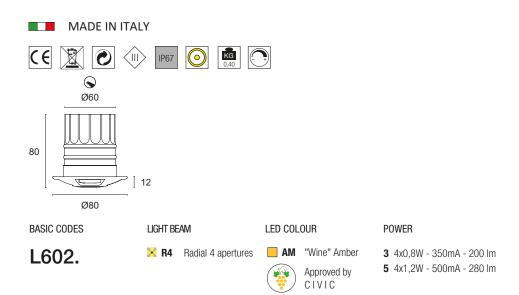

Code example:

ACSO 2 + Radial light beam 4 apertures + "Wine" Amber + 3.2W = Code: L602.R4AM3

ACSO 3

L603.





Flush-fitted in polished 304 stainless steel with power LED for accent or step marker lighting. Asymmetrical optics. Can be fitted in the floor indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA Lumen: 50m@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY


















40°

BASIC CODES

LIGHT BEAM

GLASS

LED COLOUR

POWER

L603.

40° Asymmetric

T Transparent

"Wine" Amber

CIVIC

Approved by

3 1x0,8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:

ACSO $3 + 40^{\circ}$ light beam + Transparent glass + "Wine" Amber + 0.8W = Code: L603.40AMC3





PROJECTORS

DUVAR	46
VERTIGO	47
ZEPPELIN	48

DUVAR







Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for decorative, accent, courtesy and general lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base or stake.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA Lumen: 150Lm@350mA - 210Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable



MADE IN ITALY


































LIGHT BEAM

15°









LED COLOUR





POWER

- 3 3x0,8W 350mA 150 lm
- 5 3x1,2W 500mA 210 lm

Code example:

DUVAR + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L23.715AM3

VERTIGO

L14.





Directional projector in anticorodal anodised or decorated aluminium with power LEDs. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.

Power LED CRI>80


Power: 3,2W@350mA - 4,8W@500mA Lumen: 200Lm@350mA - 280Lm@500mA 350mA - 500mA constant current power supply


Series connection, 50 cm cable



80°

MADE IN ITALY







106



LED COLOUR

LIGHT BEAM

10°

35°

60°

10

35

60

80 80°

MA CIVIC

Code example:

VERTIGO + Brushed aluminium + 10° light beam + "Wine" Amber + 3,2W = Code: L14.710AM3

ZEPPELIN

L06.





Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.

Power LED CRI>80

Power: 7,2W@350mA - 10,8W@500mA Lumen: 450Lm@350mA - 630Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable

MADE IN ITALY 110 10° 35° 60° 80° 140 BASIC CODES **FINISHES** LIGHT BEAM LED COLOUR **POWER 2** Matt black **10** 10° AM "Wine" Amber 3 9x0,8W - 350mA - 450 lm L06. **7** Brushed aluminium 5 9x1,2W - 500mA - 630 lm **35** 35° Approved by **60** 60° CIVIC**80** 80°

Code example:

ZEPPELIN + Matt black + 10° light beam + "Wine" Amber + 7,2W = Code: L06.210AM3





DECORATIVE TECHNICAL LIGHTING

PIXEL 1	52
EVA	53
REM	54
CISO P31 CEILING LIGHT	55
CISO P33 CEILING LIGHT	56
CISO S31 PENDANT LIGHT	57
CISO S33 PENDANT LIGHT	58
CEILING BOSES FOR OTHER CISO COMPOSITIONS	59

PIXEL 1

F10.






Directional lamp in polished, flexible aluminium suitable for reading, decoration or courtesy lighting. Choice of secondary optics, can be installed indoors. Screw mounting with base or on wall.

Power LED CRI>80 Power: 0,8W@350mA Lumen: 50Lm@350mA

350mA constant current power supply Constant current power supply included



MADE IN ITALY

























6 Chrome





BASE W/BOX AND SWITCH

- **BX** without switch
- BB with white switch
- **BB** with black switch

FLAT BASE AND SWITCH

- PX without switch
- PB with white switch
- PN with black switch

Code example:

F10.

PIXEL 1 + Brushed aluminium + 25° light beam + "Wine" Amber + Flat base white switch = Code: F10.725AMPB

60°

52 www.nanoledlighting.com

CIVIC

EVA L33.





Dual-emission lamp in polished aluminium for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base.

Power LED CRI>80

Power: 1,2W+1,2W@500mA Lumen: 70+70Lm@500mA

500mA constant current power supply Power supply included and built in.



MADE IN ITALY






























Code example:

 $EVA + Matt black + 15^{\circ} 1st light beam + 40^{\circ} 2nd light beam + "Wine" Amber = Code: L33.21540AM$

REM RG32.



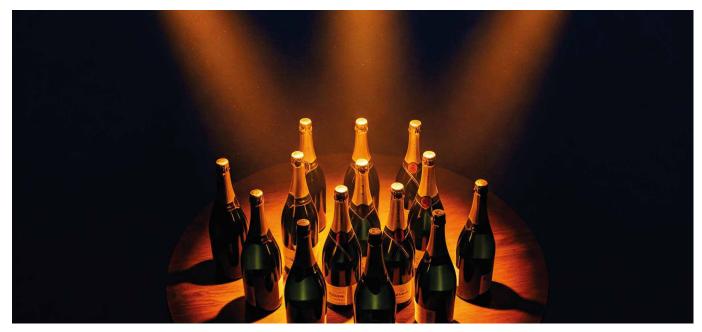


 \emptyset 32mm decorated aluminium directional projector decorated with power LEDs for spot, decorative, reading or courtesy lighting. Choice of secondary optics, can be installed indoors. Mounting with concealed insert.

Power LED CRI>80

Power: 1,2W@500mA - 3,6W@500mA Lumen: 70Lm@500mA - 210Lm@500mA 500mA constant current power supply

Series connection, 50 cm cable

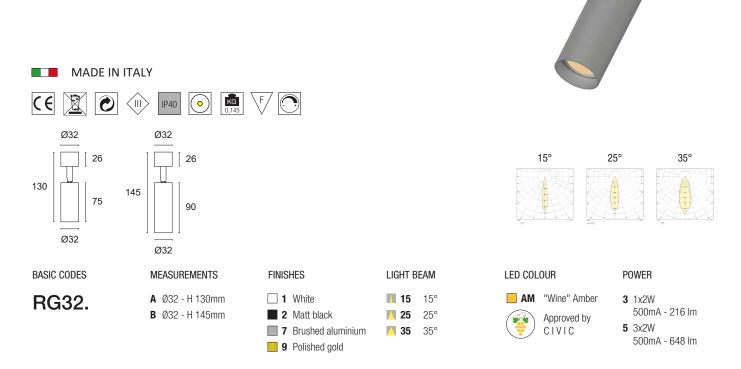


Code example:

 $REM + H130mm + White + 15^{\circ} \ light beam + "Wine" \ Amber + 1,2W = \textbf{Code: RG32.A115AM3}$

CISO P31 CEILING LIGHT





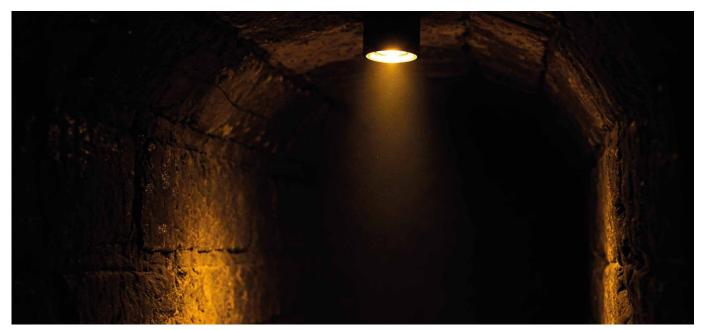

Ø32mm decorated aluminium cylinder ceiling light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>80 Power: 1,2W@500mA Lumen: 70Lm@500mA

500mA constant current power supply Power supply included and remote


















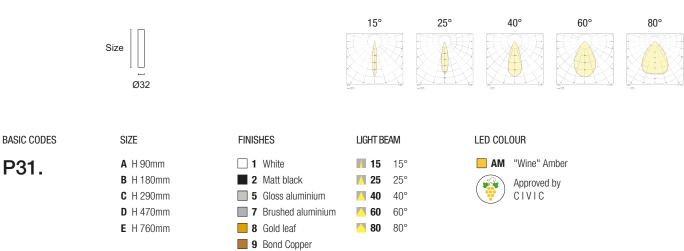

Code example:

CISO P31 CEILING LIGHT + H470mm + White + 15° light beam + "Wine" Amber = Code: P31.D115AM

CISO P33 CEILING LIGHT







Ø32mm decorated aluminium cylinder ceiling light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>80 Power: 3,6W@500mA Lumen: 210Lm@500mA

500mA constant current power supply Power supply included and remote
























BASIC CODES

P33.

SIZE

A H 90mm **B** H 180mm **C** H 290mm **D** H 470mm **E** H 760mm **FINISHES**

__ 1 White 2 Matt black **5** Gloss aluminium **7** Brushed aluminium

8 Gold leaf **9** Bond Copper LED COLOUR

AM "Wine" Amber

Approved by CIVIC

Code example:

CISO P33 CEILING LIGHT + H470mm + White + 15° light beam + "Wine" Amber = Code: P33.D115AM

56 www.nanoledlighting.com

LIGHT BEAM

15


25 25°

35 35°

CISO S31 PENDANT LIGHT



S31.

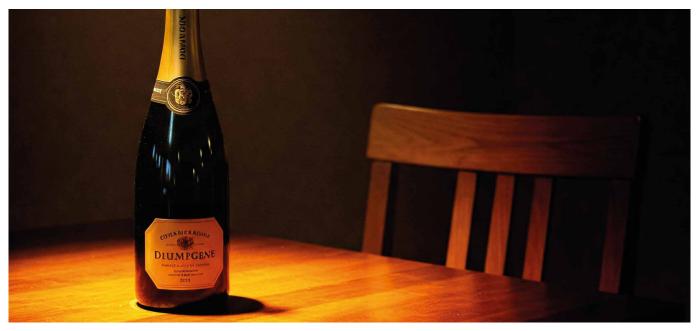

Ø32mm decorated aluminium cylinder suspended light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

Power LED CRI>80 Power: 1,2W@500mA Lumen: 70Lm@500mA

500mA constant current power supply Power supply included and integrated MADE IN ITALY IP40 Ø65 35 [🖵 15° 40° 60° 80° 25° Size Ø32 BASIC CODES SIZE **FINISHES** LIGHT BEAM LED COLOUR CABLE **A** H 90mm __ 1 White **15** 15° AM "Wine" Amber **T** Transparent S31. ■ B White **B** H 180mm 2 Matt black **25** 25° Approved by C H 290mm ${\tt CIVIC}$ ■ N Black **5** Gloss aluminium **40** 40° **D** H 470mm **7** Brushed aluminium **60** 60° R Red **E** H 760mm 8 Gold leaf 80 80° **9** Bond Copper

Code example:

 $\hbox{CISO S31 SUSPENSION LIGHT} + \hbox{H470mm} + \hbox{White} + \hbox{15}^{\circ} \\ \hbox{light beam} + \hbox{``Wine''} \\ \hbox{Amber} + \hbox{Black fabric cable} = \\ \hbox{\textbf{Code: S31.D115AMN}} \\ \hbox{CISO S31 SUSPENSION LIGHT} + \hbox{H470mm} + \hbox{White} + \hbox{15}^{\circ} \\ \hbox{light beam} + \hbox{``Wine''} \\ \hbox{Amber} + \hbox{Black fabric cable} = \\ \hbox{\textbf{Code: S31.D115AMN}} \\ \hbox{CISO S31 SUSPENSION LIGHT} + \\ \hbox{CISO S31.D115AMN} \\ \hbox{CISO S31.D115AMN}$

CISO S33 PENDANT LIGHT



S33.



Ø32mm decorated aluminium cylinder suspended light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.


Power LED CRI>80 Power: 3,6W@500mA Lumen: 210Lm@500mA 500mA constant current power supply Power supply included and integrated MADE IN ITALY Ø65 35 [🖵 15° 25° Size Ø32 BASIC CODES SIZE **FINISHES** LIGHT BEAM LED COLOUR CABLE **T** Transparent **A** H 90mm __ 1 White **15** AM "Wine" Amber S33. ■ B White **B** H 180mm 2 Matt black **25** 25° Approved by N Black C H 290mm **5** Gloss aluminium **35** 35° CIVIC**D** H 470mm **7** Brushed aluminium R Red **E** H 760mm 8 Gold leaf **9** Bond Copper

Code example:

 $\hbox{CISO S33 SUSPENSION LIGHT} + \hbox{H470mm} + \hbox{White} + 35^{\circ} \\ \hbox{light beam} + \hbox{``Wine''} \\ \hbox{Amber} + \hbox{Black fabric cable} = \\ \hbox{\textbf{Code: S33.D135AMN}} \\ \hbox{CISO S33 SUSPENSION LIGHT} + \\ \hbox{CISO S33.D135AMN} \\ \hbox{CISO S33 SUSPENSION LIGHT} + \\ \hbox{CISO S33.D135AMN} \\ \hbox{CISO S33.D135AM$

CEILING ROSES FOR OTHER CISO COMPOSITIONS



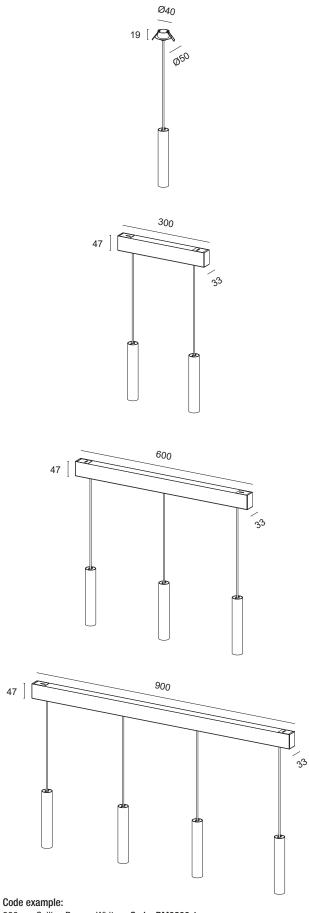

BASIC CODES

FINISHES

1 White
2 Matt black
5 Gloss aluminium
7 Brushed aluminium
8 Gold leaf
9 Bond Copper

 \emptyset 50 mm decorated aluminium ceiling rose for fixing CISO S31, S33, S50 and S80 suspension lights onto plasterboard. Flush-mounted with springs.

RM0300.

I White

Matter Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matter

Matter Matt

300 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.

Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose.

N.B. Drilling and number of suspended lights to be defined when ordering.

RM0600.

I White
I Matt black
I Fushed aluminium
I Sold leaf
I Bond Copper

600 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.

Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.



900 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.

Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.

300mm Ceiling Rose + White = Code: RM0300.1






INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK	62
ACSO SERIES FORMWORK	62
ACSO SERIES RING	62
DEHO AND DARDO FORMWORK	63
DEHO AND DARDO SERIES RING	63
DUVAR BASE AND STAKE	63

HOLLY, HALISSA AND MEMO FORMWORK paralled



Thermoplastic formwork for HOLLY, HALISSA and MEMO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.



Ø20





Position the formwork flush with the wall or




Fix the formwork with glue or putty and level it flush with the wall or floor. Prevent foreign bodies from entering the formwork.



Connect the electricals as stipulated in the product sheet and check it works correctly. Insert the product into the formwork using light pressure.

ACSO SERIES FORMWORK

Thermoplastic formwork for ACSO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.



548/80





Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the



Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.




After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.

ACSO SERIES RING


Aluminium ring for ACSO series models for use during flush fitting in plasterboard.

TES0065









Secure the ring with the supplied grub





Drill the plasterboard to the indicated size and insert the spotlight into the hole.


DEHO AND DARDO FORMWORK



Thermoplastic formwork for DEHO and DARDO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.







Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.



Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.



After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.

DEHO AND DARDO SERIES RING

Aluminium ring for DEHO and DARDO series models for use during flush fitting in plasterboard.



Ø36

TNI0076





Place the ring in the spotlight.




Secure the ring with the supplied grub screws.



Drill the plasterboard to the indicated size and insert the spotlight into the hole.

DUVAR BASE AND STAKE

Mounting systems for DUVAR projector, necessary for correct installation.

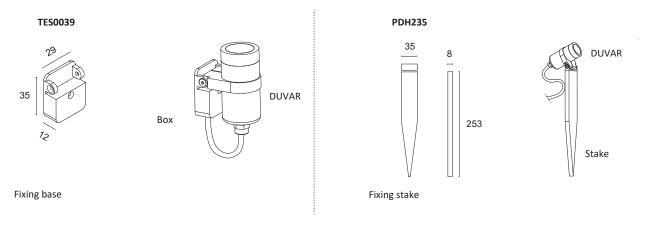







NANOLED LIGHTING

It is a brand of Tecnocavi Service srl 61021 Carpegna (PU) via Pian dei Roghi, 32 Tel. + 39 0722 77418 www.nanoledlighting.com

CONTACTS

Information office

info@nanoledlighting.com

Federico Francioni

Owner and Sales Manager federico@nanoledlighting.com

Francesco Francioni Jr.

Italy Sales commerciale@nanoledlighting.com

Fabrizio Francioni

Owner and Production and Procurement Manager fabrizio@nanoledlighting.com

Francesco Francioni

Owner and General Management francesco@nanoledlighting.com

Francesca Severi

Head of Administration amministrazione@nanoledlighting.com

Remo Giuliani

Technical and design office tecnico@nanoledlighting.com

WINE AND CHAMPAGNE COLLECTION CATALOGUE Ed. 01

Graphic design and realisation: Team Nanoled Lighting

Tecnocavi Service S.r.I. accepts no liability for printing errors, measurements and technical data. The company reserves the right to make changes to the products illustrated, at any time, without prior notice. Unauthorised reproduction or copying is prohibited.

