

2025
LIGHTING CATALOGUE



NANOLED LIGHTING
It is a brand of Tecnocavi Service srl
61021 Carpegna (PU) via Pian dei Roghi, 32
Tel. + 39 0722 77418
info@nanoledlighting.com

www.nanoledlighting.com



NANOLED LIGHTING is the lighting brand belonging to Tecnocavi Service, an Italian company founded in 1994 that has been producing and marketing LED lights nationally and internationally since 2003.
The aim of NANOLED LIGHTING is to offer lighting specialists, the furniture industry, architects and interior design contractors targeted, reliable and high-quality LED lighting solutions as they are exclusively manufactured in Italy by qualified craftsmen. NANOLED LIGHTING selects reliable suppliers and quality materials to make its lights, so that the finished product provides the user with long-lasting use.
Thanks to its own equipment and production facilities, NANOLED LIGHTING can process aluminium, steel and polycarbonate, and assemble electronic boards.

This offers a great advantage to architects and designers who also have the possibility of customising and adapting products to their clients' broader needs.
The exponential development of LED technology has also highlighted photobiological issues, and NANOLED LIGHTING - considering this aspect that is fundamental for people's health and in some cases also for environmental protection - offers sustainable and ecodesign-compliant products.
Lastly, NANOLED LIGHTING provides and accompanies its partners with all the photometric, technical and commercial support needed to integrate its lighting systems into a wide variety of projects. 100% of the products are checked and tested before being shipped. The company's entire production system is accredited by the European body IMQ, which periodically checks that all procedures adopted are up to date and comply with ISO9001:2015 certification.





INDEX BY PRODUCT FAMILY

MICROSPOT

DUST 16
DUST KIT 17
SKY 18
SKY KIT 19
ALGOL 20
HALLEY 21

INDOOR FLUSH FITTINGS

MINI VESTA 24
EOS 25
EOS Q 26
EOS CEILING LIGHT 27
EOS W 28
EOS W Q 29
EOS METAL 30
EOS METAL Q 31
IRIDE W 32
ZEFIRO W 33
VALLY 34
GIORDAN 35
GIORDAN CEILING LIGHT 36
TICHE 37
TICHE CEILING LIGHT 38
TICHE Q 39
TICHE Q CEILING LIGHT 40
TICHE MAXI 41
BASIK 1 42
BASIK Q 43
BIONIK 1 44
BIONIK Q 45
SIMPLE 46
SIMPLE Q 47
SIMPLE M 48
SIMPLE M Q 49
SIMPLE W 50
FOUR HOLE 51
FOUR HOLE Q 52
EGO METAL 53
EGO METAL Q 54
REMOVE PLUS 55
REMOVE MINUS 56
PAD 57
ERMA 58

INDOOR AND OUTDOOR RECESSED LIGHTS

REMOVE PLUS WP 62
HOLLY 63
HALISSA 64
MEMO 65
DEHO 2 66
DEHO 3 67
DEHO 4 68
DEHO 5 69
DEHO Q 70
DARDO 2 71
DARDO 3 72
DARDO Q 73
ACSO 1 74
ACSO 2 75
ACSO 3 76
ACRUX 1 77

316 L RECESSED LIGHTS

DEHO 1 L 80
DEHO 1 L Q 81
DEHO 2 L 82
DEHO 3 L 83
DEHO 4 L 84
DEHO 5 L 85
DEHO Q L 86

INDEX BY PRODUCT FAMILY

PROJECTORS

DUVAR 90
VERTIGO 91
ZEPPELIN 92

DECORATIVE TECHNICAL LIGHTING

PIXEL 1 96
ROMY 97
SARY 98
ISA 99
LILLY 100
EVA 101
LINEA 102
QUADRA Q1 103
QUADRA Q2 104
QUADRA Q3 105
QUADRA Q4 106
QUADRA R1 107
QUADRA R2 108
QUADRA R3 109
REM 110
CISO P31 CEILING LIGHT 111
CISO P33 CEILING LIGHT 112
CISO P50 CEILING LIGHT 113
CISO P80 CEILING LIGHT 114
CISO S31 PENDANT LIGHT 115
CISO S33 PENDANT LIGHT 116
CISO S50 PENDANT LIGHT 117
CISO S80 PENDANT LIGHT 118
CEILING ROSES FOR OTHER CISO COMPOSITIONS 119

LINEAR FLUSH-MOUNTED SYSTEM

EPTA 122
SIGMA 124
REFLEX 126
IOTA 128
RASO 130
RHO 1 132
YPSILON 1 134
DELTA 3 136
TAU 138
MILKY 140

CEILING-MOUNTED OR FLUSH-MOUNTED LINEAR SYSTEMS

MINI 144
JEY 1 146
JEY 2 148
ZETA 1 150
ZETA 2 152
RHO 3 154
VELA 1 156
VELA 2 158
GAMMA 160
VEGA 162
BETA 164
DELTA 1 166
KAPPA 3 168
QU 170
H1 172
H2 174
H3 176
C1 178
C2 180

LINEAR PENDANT SYSTEMS

JEY PENDANT 184
MAGNETIC JEY PENDANT 186
RHO PENDANT 188
DELTA PENDANT 190
KAPPA PENDANT 192
MAGNETIC KAPPA PENDANT 194

INDEX BY PRODUCT FAMILY

LINEAR WALL SYSTEMS

KAPPA 1 198
JEY 5 200

DIRECTIONAL LINEAR SYSTEMS

DIRECTIONAL RHO 204
DIRECTIONAL DELTA 206

FLOOR LINEAR SYSTEM

YPSILON FLOOR LIGHT 210

RGB SYSTEMS

SKY RGB 214
ALGOL RGB 215
HALLEY RGB 216
EOS RGB 217
BASIK 1 RGB 218
BASIK Q RGB 219
BIONIK 1 RGB 220
BIONIK Q RGB 221
FOUR HOLE RGB 222
FOUR HOLE Q RGB 223
DEHO 2 RGB 224
DEHO Q RGB 225
ACSO 1 RGB 226
VERTIGO RGB 227
DUVAR RGB 228

POWER SUPPLIES

350mA CONSTANT CURRENT 232
500mA CONSTANT CURRENT 233
CONSTANT CURRENT FOR COB 234
MULTICURRENT 235
CONSTANT VOLTAGE 12Vdc 236
CONSTANT VOLTAGE 24Vdc 237
CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH 239
EMERGENCY DEVICE 241

CONNECTION SYSTEMS

SERIES CONNECTION 244
PARALLEL CONNECTION 245
SERIES-PARALLEL CONNECTION 246
RGB CONNECTION 247

CONTROL SYSTEMS

SK-V1 CONTROL UNIT 250
RF.001 CONTROL UNIT 251
SR-1029 CONTROL UNIT 252
RFL20K CONTROL UNIT 253
SR-1029W CONTROL UNIT 254
1009FA3 CONTROL UNIT 255
DLM1224-1CV CONTROL UNIT 256
MINI-1CV CONTROL UNIT 257
MINI-1CV-DALI CONTROL UNIT 258
MINI-1CV-CASAMBI CONTROL UNIT 259
LINE-5CV CONTROL UNIT 260
DLX1224-4CV-DALI CONTROL UNIT 261
LINE 5CV-CASAMBI CONTROL UNIT 262
DLC1248-1CC350 CONTROL UNIT 263
DLC1248-1CC500 CONTROL UNIT 263
DLX1224-4CC350 CONTROL UNIT 264
DLX1224-4CC500 CONTROL UNIT 264
VOLUMETRIC SENSOR 265
INFRARED SENSOR 265
TOUCH SENSOR 265
TOUCH MINI SENSOR 266
TOUCH DIMMER SENSOR 266
MINI MOTION DETECTOR SENSOR 267
TOUCH SENSOR SWITCH SENSOR 267
IR SENSOR SWITCH SENSOR 267

INDEX BY PRODUCT FAMILY

INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK 270
ACSO AND ACRUX SERIES FORMWORK 270
ACSO AND ACRUX SERIES RING 270
DEHO AND DARDO SERIES FORMWORK 271
DEHO AND DARDO SERIES RING 271
PAD FORMWORK 271
REMOVE PLUS FORMWORK 272
REMOVE MINUS FORMWORK 272
DUVAR BASE AND STAKE 272

COMPLEMENTARY SYSTEMS

REM COMPLEMENTARY SYSTEMS 276
DARK COMPLEMENTARY SYSTEMS 276

ALPHABETICAL INDEX

12Vdc CONSTANT VOLTAGE POWER SUPPLIES 236
24Vdc CONSTANT VOLTAGE POWER SUPPLIES 237
24Vdc DALI2 and PUSH CONSTANT VOLTAGE POWER SUPPLIES 239
350mA CONSTANT CURRENT POWER SUPPLIES 232
500mA CONSTANT CURRENT POWER SUPPLIES 233

A

ACRUX 1 77
ACSO 1 RGB 226
ACSO 1 74
ACSO 2 75
ACSO 3 76
ACSO AND ACRUX SERIES FORMWORK 270
ACSO AND ACRUX SERIES RING 270
ALGOL RGB 215
ALGOL 20

B

BASIK 1 RGB 218
BASIK 1 42
BASIK Q RGB 219
BASIK Q 43
BETA 164
BIONIK 1 RGB 220
BIONIK 1 44
BIONIK Q RGB 221
BIONIK Q 45

C

C1 178
C2 180
CEILING ROSES FOR OTHER CISO COMPOSITIONS 119
CISO P31 CEILING LIGHT 111
CISO P33 CEILING LIGHT 112
CISO P50 CEILING LIGHT 113
CISO P80 CEILING LIGHT 114
CISO S31 PENDANT LIGHT 115
CISO S33 PENDANT LIGHT 116
CISO S50 PENDANT LIGHT 117
CISO S80 PENDANT LIGHT 118
CONSTANT CURRENT POWER SUPPLIES FOR COB 234

D

DARDO 2 71
DARDO 3 72
DARDO Q 73
DARK COMPLEMENTARY SYSTEMS 276
DEHO 1 L Q 81
DEHO 1 L 80
DEHO 2 L 82
DEHO 2 RGB 224
DEHO 2 66
DEHO 3 L 83
DEHO 3 67
DEHO 4 L 84
DEHO 4 68
DEHO 5 L 85
DEHO 5 69
DEHO AND DARDO SERIES FORMWORK 271
DEHO AND DARDO SERIES RING 271
DEHO Q L 86
DEHO Q RGB 225
DEHO Q 70
DELTA 1 166
DELTA 3 136
DELTA PENDANT 190
DIRECTIONAL DELTA 206
DIRECTIONAL RHO 204
DLC1248-1CC350 CONTROL UNIT 263
DLC1248-1CC500 CONTROL UNIT 263
DLM1224-1CV CONTROL UNIT 256
DLX1224-4CC350 CONTROL UNIT 264
DLX1224-4CC500 CONTROL UNIT 264
DLX1224-4CV-DALI CONTROL UNIT 261
DUST KIT 17
DUST 16
DUVAR BASE AND STAKE 272
DUVAR RGB 228
DUVAR 90

ALPHABETICAL INDEX

E

EGO METAL Q 54
EGO METAL 53
EMERGENCY DEVICES 241
EOS CEILING LIGHT 27
EOS METAL Q 31
EOS METAL 30
EOS Q 26
EOS RGB 217
EOS W Q 29
EOS W 28
EOS 25
EPTA 122
ERMA 58
EVA 101

F

FOUR HOLE Q RGB 223
FOUR HOLE Q 52
FOUR HOLE RGB 222
FOUR HOLE 51

G

GAMMA 160
GIORDAN CEILING LIGHT 36
GIORDAN 35

H

H1 172
H2 174
H3 176
HALISSA 64
HALLEY RGB 216
HALLEY 21
HOLLY 63
HOLLY, HALISSA AND MEMO FORMWORK 270

I

INFRARED SENSOR 265
IOTA 128
IR SENSOR SWITCH SENSOR 267
IRIDE W 32
ISA 99

J

JEY 1 146
JEY 2 148
JEY 5 200
JEY PENDANT 184

K

KAPPA 1 198
KAPPA 3 168
KAPPA PENDANT 192

L

LILLY 100
LINE 5CV-CASAMBI CONTROL UNIT 262
LINE-5CV CONTROL UNIT 260
LINEA 102

M

MAGNETIC JEY PENDANT 186
MAGNETIC KAPPA PENDANT 194
MEMO 65
MILKY 140
MINI MOTION DETECTOR SENSOR 267
MINI VESTA 24
MINI 144
MINI-1CV CONTROL UNIT 257
MINI-1CV-CASAMBI CONTROL UNIT 259
MINI-1CV-DALI CONTROL UNIT 258
MULTI-CURRENT POWER SUPPLIES 235

P

PAD FORMWORK 271
PAD 57
PARALLEL CONNECTION ACCESSORIES 245
PIXEL 1 96

ALPHABETICAL INDEX

Q

QU 170
QUADRA Q1 103
QUADRA Q2 104
QUADRA Q3 105
QUADRA Q4 106
QUADRA R1 107
QUADRA R2 108
QUADRA R3 109

R

RASO 130
REFLEX 126
REM COMPLEMENTARY SYSTEMS 276
REM 110
REMOVE MINUS FORMWORK 272
REMOVE MINUS 56
REMOVE PLUS FORMWORK 272
REMOVE PLUS WP 62
REMOVE PLUS 55
RF.001 CONTROL UNIT 251
RFL20K CONTROL UNIT 253
RGB CONNECTION ACCESSORIES 247
RHO 1 132
RHO 3 154
RHO PENDANT 188
ROMY 97

S

SARY 98
SERIES CONNECTION ACCESSORIES 244
SERIES-PARALLEL CONNECTION ACCESSORIES 246
SIGMA 124
SIMPLE M Q 49
SIMPLE M 48
SIMPLE Q 47
SIMPLE W 50
SIMPLE 46
SK-V1 CONTROL UNIT 250
SKY 18
SKY KIT 19
SKY RGB 214
SR-1009FA3 CONTROL UNIT 255
SR-1029 CONTROL UNIT 252
SR-1029W CONTROL UNIT 254

T

TAU 138
TICHE CEILING LIGHT 38
TICHE MAXI 41
TICHE Q CEILING LIGHT 40
TICHE Q 39
TICHE 37
TOUCH DIMMER SENSOR 266
TOUCH MINI SENSOR 266
TOUCH SENSOR SWITCH SENSOR 267
TOUCH SENSOR 265

V

VALLY 34
VEGA 162
VELA 1 156
VELA 2 158
VERTIGO RGB 227
VERTIGO 91
VOLUMETRIC SENSOR 265

Y

YPSILON 1 134
YPSILON FLOOR LIGHT 210

Z

ZEFIRO W 33
ZEPPELIN 92
ZETA 1 150
ZETA 2 152

SYMBOLS

Product compliant with European Electrical Safety Regulations.

Product subject to European WEEE regulations on disposal of items.

Product made with recyclable materials.

Category III Products powered by safety voltage below 50V.

IP.. Ingress Production (see below).

Product that can be installed both indoors and outdoors.

Product that can be installed indoors.

Indicates the theoretical weight of the product, without wiring.

Product suitable for mounting on normally flammable surfaces.

It means that the "wine"Amber color avoid the "taste of light". Compliant with the standards of the Comité Interprofessionnel du vin de Champagne (CIVC) for the lighting of cellars, storage rooms and furnishings.

Product that can be inserted in furniture.

Indicates that the product can be walked on.

Indicates the type of optics (symmetrical or asymmetrical) and the degrees of aperture.

Size of hole to be drilled for mounting without formwork.

Indicates that the product can be dimmed.

Class I. Lighting system with earthing device.

Category II Lighting system with reinforced or double insulation, without earthing device.

Can be switched on by touching the metal surface.

Compliance with the RoHs Directive 2002/95/EC that bans the use of hazardous substances in electrical and electronic equipment (lead, mercury, etc.)

INGRESS PROTECTION IP..

The 'resistance' offered by the device to penetration by solids and liquids is indicated by the prefix IP (international protection) followed by two significant numbers. The first number identifies the degree of protection against the ingress of solids. The second number identifies the degree of protection against the ingress of liquids.

IP0. Unprotected.

IP1. Protected against a solid object greater than 50 mm.

IP2. Protected against a solid object greater than 12 mm.

IP3. Protected against a solid object greater than 2.5 mm.

IP4. Protected against a solid object greater than 1 mm.

IP5. Protected against ingress of dust.

IP6. Completely protected against ingress of dust.

IP.0 Unprotected.

IP.1 Protected against vertical dripping water.

IP.2 Protected against vertical dripping water when tilted up 15°.

IP.3 Protected against rain.

IP.4 Protected against vertical splashing.

IP.5 Protected against jets of water.

IP.6 Protected against waves.

IP.7 Protected against effects from temporary immersion.



MICROSPOT

DUST 16
DUST KIT 17
SKY 18
SKY KIT 19
ALGOL 20
HALLEY 21

DUST

L93.




Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect.
Can be installed indoors and outdoors if partially protected, spring-mounted.


3mm high-brightness LED
Power: 0.1W@3.2Vdc
Lumen: 2Lm@3.2Vdc
Constant voltage supply 12Vdc only with GNTG box and in groups of three
Mandatory connection in multiples of three with CNTG box, cable 150 cm



Compulsory accessories for connection page 246
Constant voltage power supplies page 236
Dimming Accessories page 249

MADE IN ITALY





BASIC CODES

L93.

FINISHES

- **1** White
- **2** Matt black
- **6** Chrome

LED COLOUR

- **BF** 6000K
- **BN** 4000K
- **BC** 3000K
- **BL** Blue
- **VE** Green

Code example:
DUST + White + 6000K = Code: L93.1BF

DUST KIT
KMQ.L93.



18-pack of the DUST model for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect on an area of 1 square metre. The package includes the connection box and power supply. Can be installed indoors and outdoors if partially protected, spring-mounted.

3mm high-brightness LED
Power: 0.1W@3.2Vdc
Lumen: 2Lm@3.2Vdc
Constant 12Vdc voltage supply and CNTG/18 box
Mandatory connection in multiples of three with CNTG box, cable 150 cm

Dimming Accessories page 249


No. 18 DUST




MADE IN ITALY

No. 1 CNTG/18 BOX



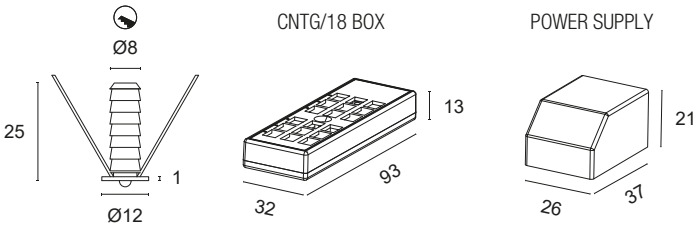

No. 1 POWER SUPPLY



BASIC CODES

KMQ.L93.

FINISHES

- **1** White
- **2** Matt black
- **6** Chrome

LED COLOUR

- **BF** 6000K
- **BN** 4000K
- **BC** 3000K
- **BL** Blue
- **VE** Green

Code example:
DUST KIT + White + 6000K = Code: KMQ.L93.1BF

SKY
L90.




Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect.
Can be installed indoors and outdoors if partially protected, spring-mounted.


5mm high-brightness LED
Power: 0.1W@3.2Vdc
Lumen: 2Lm@3.2Vdc
Constant voltage supply 12Vdc only with GNTG box and in groups of three
Mandatory connection in multiples of three with CNTG box, cable 150 cm

Compulsory accessories for connection page 246
Constant voltage power supplies page 236
Dimming Accessories page 249



MADE IN ITALY





BASIC CODES	FINISHES	LED COLOUR
L90.	**1** White	**BF** 6000K
	2 Matt black	**BN** 4000K
	6 Chrome	**BC** 3000K
		BL Blue

Code example:
SKY + Chrome + 3000K = Code: L90.6BC

SKY KIT
KMQ.L90.



18-pack of the SKY model for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect on an area of 1 square metre. The package includes the connection box and power supply. Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED
Power: 0.1W@3.2Vdc
Lumen: 2Lm@3.2Vdc
Constant 12Vdc voltage supply and CNTG/18 box
Mandatory connection in multiples of three with CNTG box, cable 150 cm

Dimming Accessories page 249


N°18 SKY




MADE IN ITALY

No. 1 CNTG/18 BOX



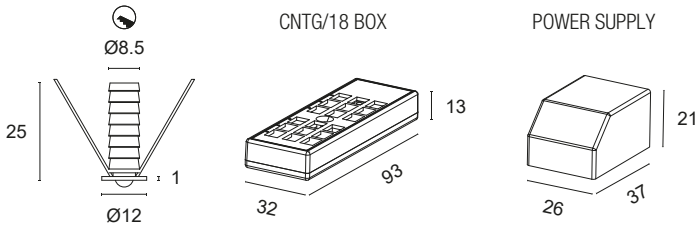

No. 1 POWER SUPPLY



BASIC CODES

KMQ.L90.

FINISHES

- **1** White
- **2** Matt black
- **6** Chrome

LED COLOUR

- **BF** 6000K
- **BN** 4000K
- **BC** 3000K
- **BL** Blue

Code example:
SKY KIT + Chrome + 3000K = Code: KMQ.L90.6BC

ALGOL

L80.




Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating a 'starry sky' effect.
Can be installed indoors and outdoors if partially protected, spring-mounted.


5mm high-brightness LED
Power: 0.5W@12Vdc
Lumen: 6Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 150 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249



MADE IN ITALY





BASIC CODES	FINISHES	LED COLOUR
L80.	**1** White	**BF** 6000K
	2 Matt black	**BN** 4000K
	6 Chrome	**BC** 3000K
		BL Blue

Code example:
ALGOL + Chrome + Blue = Code: L80.6BL

HALLEY

L31.



Flush-fitted in polished aluminium for accent, decoration and courtesy lighting. Also indicated for 'starry sky'.
Choice of secondary optics, can be installed indoors and outdoors if partially protected, spring-mounted.


Power LED CRI>80
Power: 1W@350mA
Lumen: 135Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232
Accessories for connection page 244
Dimming Accessories page 249



MADE IN ITALY





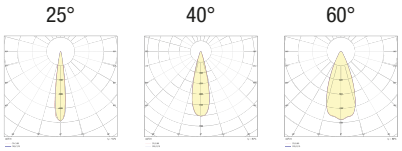

BASIC CODES

L31.

FINISHES

- **1** White
- **2** Matt black
- **6** Chrome
- **7** Brushed aluminium

LIGHT BAND

- **25** 25°
- **40** 40°
- **60** 60°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
HALLEY + White + Light Beam 40°+ 3000K = Code: L31.140BC



INDOOR FLUSH FITTINGS

MINI VESTA 24
EOS 25
EOS Q 26
EOS CEILING LIGHT 27
EOS W 28
EOS W Q 29
EOS METAL 30
EOS METAL Q 31
IRIDE W 32
ZEFIRO W 33
VALLY 34
GIORDAN 35
GIORDAN CEILING LIGHT 36
TICHE 37
TICHE CEILING LIGHT 38
TICHE Q 39
TICHE Q CEILING LIGHT 40
TICHE MAXI 41
BASIK 1 42
BASIK Q 43
BIONIK 1 44
BIONIK Q 45
SIMPLE 46
SIMPLE Q 47
SIMPLE M 48
SIMPLE M Q 49
SIMPLE W 50
FOUR HOLE 51
FOUR HOLE Q 52
EGO METAL 53
EGO METAL Q 54
REMOVE PLUS 55
REMOVE MINUS 56
PAD 57
ERMA 58

MINI VESTA

L9X.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant current power supplies page 232-233
Accessories for quick connection page 244
Dimming Accessories page 249



MADE IN ITALY

350mA 500mA



BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR	POWER
L9X.	**1** White **6** Chrome **7** Brushed aluminium **8** Transparent	**00** 120°	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 1x1W - 350mA - 135 lm** **5 1x2W - 500mA - 216 lm**

Code example:
MINI VESTA + White + 120° light beam + 3000K + 1W = Code: L9X.100BC3

EOS


L95.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Accessories for quick connection page 244
Dimming Accessories page 249




MADE IN ITALY




L95. 350mA



L95. 500mA



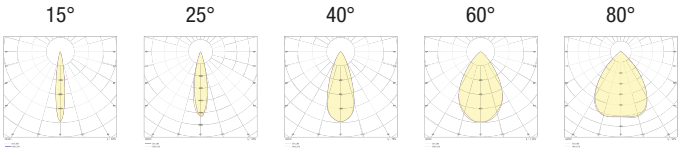

BASIC CODES

L95.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LIGHT BAND

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

POWER

3 1x1W - 350mA - 135 lm
5 1x2W - 500mA - 216 lm

Code example:
EOS + Brushed Aluminium + 15° light beam + 3000K + 1W = Code: L95.715BC3

EOS Q


L9Q.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Accessories for quick connection page 244
Dimming Accessories page 249




MADE IN ITALY


350mA 500mA

L9Q. 350mA



L9Q. 500mA



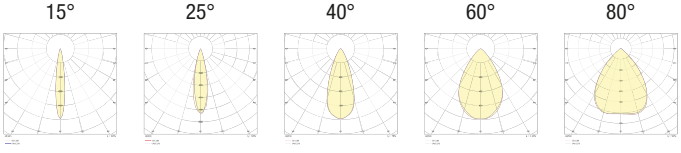

BASIC CODES

L9Q.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LIGHT BAND

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

POWER

3 1x1W - 350mA - 135 lm
5 1x2W - 500mA - 216 lm

Code example:
EOS Q + Brushed Aluminium + 15° light beam + 3000K + 1W = Code: L9Q.715BC3

EOS CEILING LIGHT


L95D.



Thermoplastic ceiling light for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, mounting with concealed screws.


Power LED CRI>80
Power: 1W@350mA
Lumen: 135Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232
Accessories for quick connection page 244
Dimming Accessories page 249



MADE IN ITALY





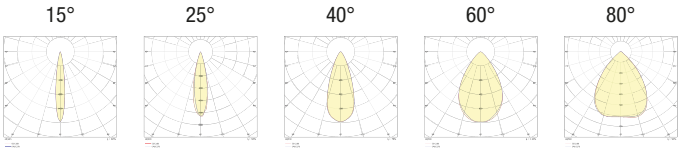

BASIC CODES

L95D.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LIGHT BAND

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
EOS CEILING LIGHT + Brushed Aluminium + 25° light beam + 3000K + 1W = Code: L95D.725RO

EOS W

L9512.




Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249



MADE IN ITALY



120°



BASIC CODES

L9512.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
EOS W + White + 3000K = Code: L9512.1BC

EOS W Q


L9Q12.



Flush-fi ed in thermoplas c for accent, decora on and courtesy ligh ng. Diffuse ligh ng, can be installed indoors, pressure-mounted.


WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connec on, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connec on page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

L9Q12.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
EOS W Q + White + 3000K = Code: L9Q12.1BC

EOS METAL
L95M.



Flush-fitted in polished aluminium with power LEFD for accent, decoration and courtesy lighting.
Choice of secondary optics, can be installed indoors. Flush-mounted with springs.


Power LED CRI>80
Power: 2W@500mA
Lumen: 216Lm@500mA
500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 233
Dimming Accessories page 249



MADE IN ITALY





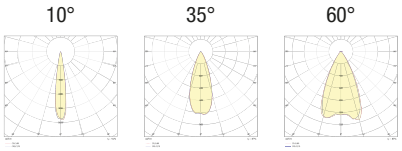

BASIC CODES

L95M.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LIGHT BAND

- **10** 10°
- **35** 35°
- **60** 60°

LED COLOUR


- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
EOS METAL + Brushed Aluminium + 40° light beam + 3000K = Code: L95M.740BC

EOS METAL Q


L9QM.

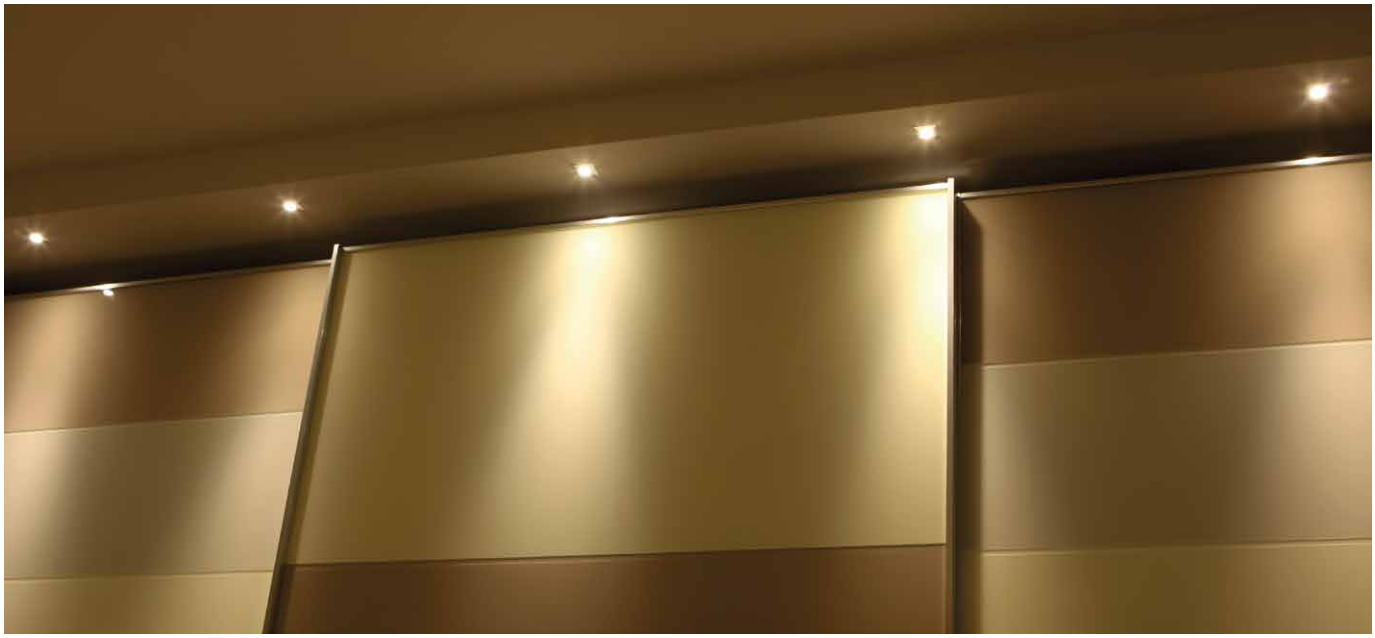

Flush-fitted in polished aluminium with power LEFD for accent, decoration and courtesy lighting.
Choice of secondary optics, can be installed indoors. Flush-mounted with springs.


Power LED CRI>80
Power: 2W@500mA
Lumen: 216Lm@500mA
500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 233
Dimming Accessories page 249



MADE IN ITALY





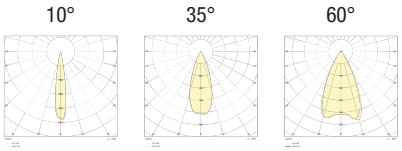

BASIC CODES

L95QM.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LIGHT BAND

- **10** 10°
- **35** 35°
- **60** 60°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
EOS METAL Q + Brushed Aluminium + 40° light beam + 3000K = Code: L9QM.740BC

IRIDE W

L9912.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.


WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

L9912.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
IRIDE W + White + 3000K = Code: L9912.1BC

ZEFIRO W


L9812.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.


WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

L9812.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
ZEFIRO W + White + 3000K = Code: L9812.1BC

VALLY
F02LD.



Printed metal light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 324Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

F02LD.

FINISHES

- **1** White
- **2** Matt black
- **4** Bronze
- **6** Chrome
- **7** Brushed aluminium
- **9** Polished gold

GLASS

- **0** Opaline

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
VALLY + Brushed Aluminium + Opal Glass + 4000K = Code: F02LD.70BN


GIORDAN
F01LD.



Thermoplastic recessed light system for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 324Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

F01LD.

FINISHES

- **1** White
- **2** Matt black
- **4** Bronze
- **6** Chrome
- **7** Brushed aluminium
- **9** Polished gold

GLASS

- **0** Opaline

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
GIORDAN + Brushed Aluminium + Opal Glass + 3000K = Code: F01LD.70BC

GIORDAN CEILING LIGHT

F01LDD.



Thermoplastic ceiling light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with concealed screws.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 324Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

F01LDD.

FINISHES

- **1** White
- **2** Matt black
- **4** Bronze
- **6** Chrome
- **7** Brushed aluminium
- **9** Polished gold

GLASS

- **0** Opaline


LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
GIORDAN CEILING LIGHT + Brushed Aluminium + Opal Glass + 3000K = Code: F01LDD.70BC

TICHE

L15.

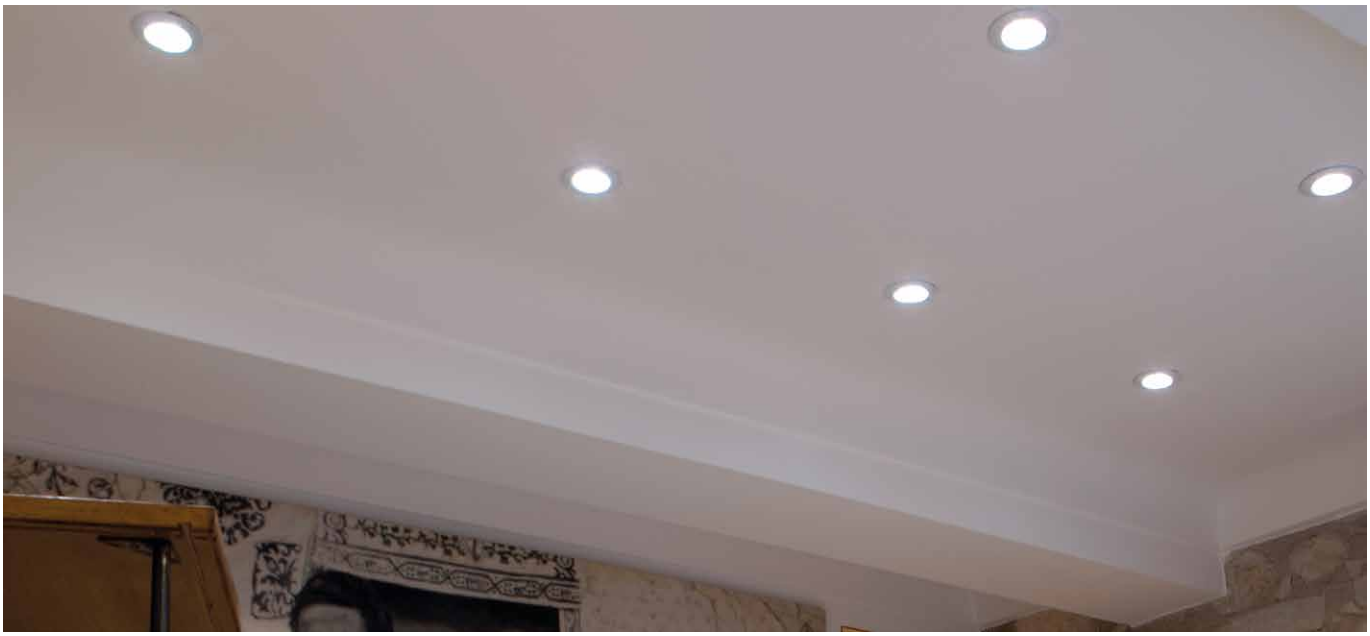

Polished aluminium light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs even on small surfaces.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 459Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

L15.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **4** Bronze
- **5** Gloss aluminium
- **6** Chrome
- **7** Brushed aluminium
- **9** Polished gold

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
TICHE + Brushed aluminium + 3000K = Code: L15.7BC

TICHE CEILING LIGHT

L15D.



Polished aluminium ceiling light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with concealed screws.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 459Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

L15D.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
TICHE CEILING LIGHT + White + 3000K = Code: L15D.1BC

TICHE Q
L15Q.



Polished aluminium light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with pressure springs even on small surfaces.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 459Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

L15Q.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **4** Bronze
- **5** Gloss aluminium
- **6** Chrome
- **7** Brushed aluminium
- **9** Polished gold

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
TICHE Q + Brushed aluminium + 3000K = Code: L15Q.7BC

TICHE Q CEILING LIGHT


L15QD.



Polished aluminium ceiling light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Mounting with concealed screws.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 459Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES

L15QD.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
TICHE Q CEILING LIGHT + White + 3000K = Code: L15QD.1BC

TICHE MAXI


L15M.



Polished aluminium recessed light for primary lighting in small rooms, accessories or furniture. Even, diffuse lighting, can be installed indoors. Flush mounting on plasterboard with pressure springs.


MID POWER LED CRI>80
Power: 9W@12Vdc
Lumen: 945Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 236
Accessories for quick connection page 245
Dimming Accessories page 249




MADE IN ITALY





120°



BASIC CODES	FINISHES	LED COLOUR
L15M.	**1** White	**BN** 4000K
	2 Matt black	**BC** 3000K
	5 Gloss aluminium	**CC** 2700K
	7 Brushed aluminium	

Code example:
TICHE MAXI + Brushed aluminium + 3000K = Code: L15M.7BC

BASIK 1

L01.



Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.


Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Dimming Accessories page 249



MADE IN ITALY





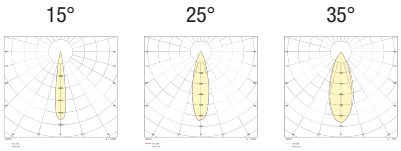

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L01.	**1** White	**15** 15°	**BN** 4000K	**3 3x1W - 350mA - 405 lm**
	2 Matt black	**25** 25°	**BC** 3000K	**5 3x2W - 500mA - 648 lm**
	5 Gloss aluminium	**35** 35°	**CC** 2700K	
	6 Chrome		**BL** Blue	
	7 Brushed aluminium		**VE** Green	
			RO Red	
			AM "Wine" Amber	
			Approved by C I V C	

Code example:
BASIK 1 + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L01.715BC3

BASIK Q


L02.



Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.


Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant current power supplies page 232-233
Dimming Accessories page 249



MADE IN ITALY

350mA 500mA





BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L02.	**1** White	**15** 15°	**BN** 4000K	**3 3x1W - 350mA - 405 lm**
	2 Matt black	**25** 25°	**BC** 3000K	**5 3x2W - 500mA - 648 lm**
	5 Gloss aluminium	**35** 35°	**CC** 2700K	
	6 Chrome		**BL** Blue	
	7 Brushed aluminium		**VE** Green	
			RO Red	
			AM "Wine" Amber	
			Approved by C I V C	

Code example:
BASIK Q + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L02.715BC3

BIONIK 1

L21.



Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.


Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Dimming Accessories page 249



MADE IN ITALY

350mA 500mA



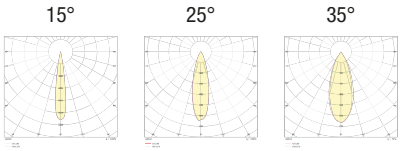

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L21.	**1** White	**15** 15°	**BN** 4000K	**3 3x1W - 350mA - 405 lm**
	2 Matt black	**25** 25°	**BC** 3000K	**5 3x2W - 500mA - 648 lm**
	5 Gloss aluminium	**35** 35°	**CC** 2700K	
	6 Chrome		**BL** Blue	
	7 Brushed aluminium		**VE** Green	
			RO Red	
			AM "Wine" Amber	
			Approved by C I V C	

Code example:
BIONIK 1 + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L21.715BC3

BIONIK Q

L22.



Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.


Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Dimming Accessories page 249



MADE IN ITALY

350mA 500mA



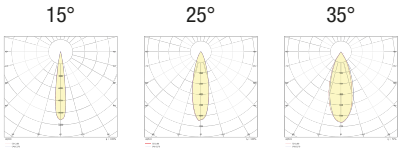

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L22.	**1** White	**15** 15°	**BN** 4000K	**3 3x1W - 350mA - 405 lm**
	2 Matt black	**25** 25°	**BC** 3000K	**5 3x2W - 500mA - 648 lm**
	5 Gloss aluminium	**35** 35°	**CC** 2700K	
	6 Chrome		**BL** Blue	
	7 Brushed aluminium		**VE** Green	
			RO Red	
			AM "Wine" Amber	
			Approved by C I V C	

Code example:
BIONIK Q + Brushed Aluminium + 15° light beam + 3000K + 3W = Code: L22.715BC3

SIMPLE
L10.



Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in residential and retail environments. Choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors, spring-mounted.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY





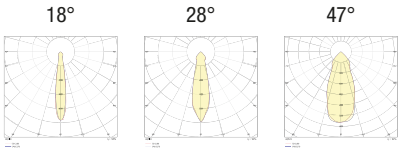

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L10.	**1** White	**18** 18°	**BN** 4000K
	2 Matt black	**28** 28°	**BC** 3000K
	5 Gloss aluminium	**47** 47°	**CC** 2700K
	6 Chrome		
	7 Brushed aluminium		

Code example:
SIMPLE + White + Light Beam 18° + 4000K + 2W = Code: L10.118BN

SIMPLE Q

L10Q.



Polished aluminium recessed square light with COB LEDs CRI>90 for primary lighting in residential and retail environments. Choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors, spring-mounted.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY





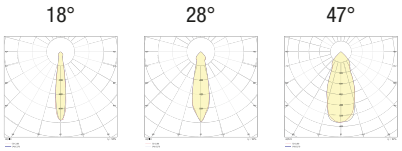

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L10Q.	**1** White	**18** 18°	**BN** 4000K
	2 Matt black	**28** 28°	**BC** 3000K
	5 Gloss aluminium	**47** 47°	**CC** 2700K
	6 Chrome		
	7 Brushed aluminium		

Code example:
SIMPLE Q + White + Light Beam 18° + 4000K + 2W = Code: L10Q.118BN

SIMPLE M

L11.




Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in large residential and retail environments. Protected choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors. Spring mounted.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable

Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY

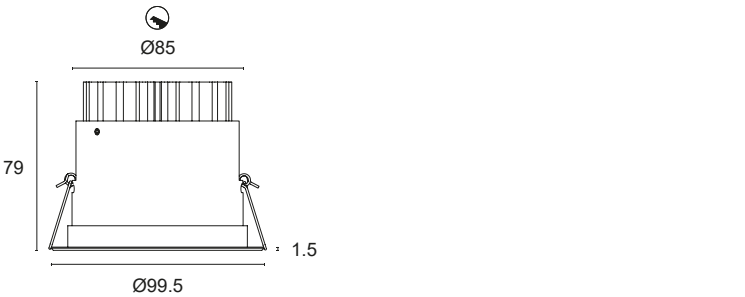

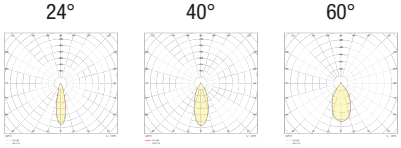


BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L11.	**1** White	**24** 24°	**BN** 4000K
	2 Matt black	**40** 40°	**BC** 3000K
	5 Gloss aluminium	**60** 60°	**CC** 2700K
	6 Chrome		
	7 Brushed aluminium		

Code example:
SIMPLE M + White + Light Beam 24° + 4000K = Code: L11.124BN

SIMPLE M Q

L11Q.

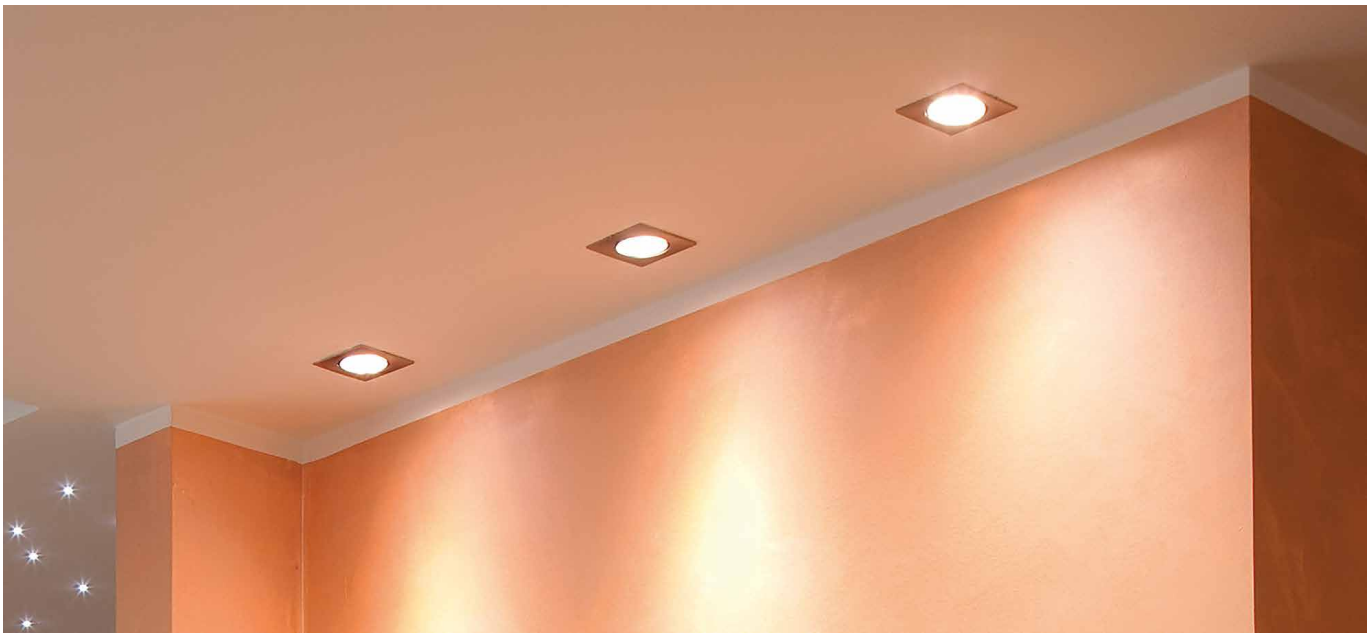

Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in large residential and retail environments. Protected choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors. Spring mounted.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY





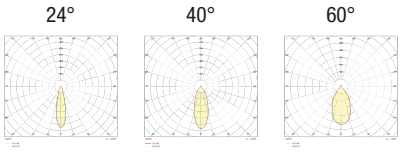

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L11Q.	**1** White	**24** 24°	**BN** 4000K
	2 Matt black	**40** 40°	**BC** 3000K
	5 Gloss aluminium	**60** 60°	**CC** 2700K
	6 Chrome		
	7 Brushed aluminium		

Code example:
SIMPLE M Q + White + Light Beam 24° + 4000K = Code: L11Q.124BN

SIMPLE W

L12.



Polished aluminium recessed light with COB LEDs CRI>90 for primary lighting in large residential and retail environments. Protected choice of secondary optics. Excellent lumen/watt ratio; can be installed flush on plasterboard indoors. Spring mounted.


COB LED CRI>90
Power: 16W@450mA
Lumen: 1895Lm@450mA
450mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY





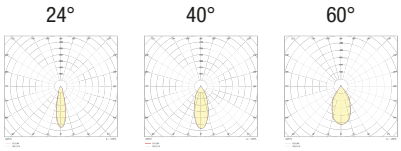

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L12.	**1** White	**24** 24°	**BN** 4000K
	2 Matt black	**40** 40°	**BC** 3000K
	5 Gloss aluminium	**60** 60°	**CC** 2700K
	6 Chrome		
	7 Brushed aluminium		

Code example:
SIMPLE W + White + Light Beam 24° + 4000K = Code: L12.124BN

FOUR HOLE

L24.



Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.


Power LED CRI>80
Power: 4W@350mA – 8W@500mA
Lumen: 540Lm@350mA – 864Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Dimming Accessories page 249



MADE IN ITALY





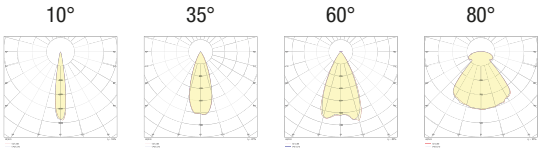


BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L24.	**1** White	**10** 10°	**BN** 4000K	**3 4x1W - 350mA - 540 lm**
	2 Matt black	**35** 35°	**BC** 3000K	**5 4x2W - 500mA - 864 lm**
	5 Gloss aluminium	**60** 60°	**CC** 2700K	
	7 Brushed aluminium	**80** 80°	**BL** Blue	
			VE Green	
			RO Red	
			AM "Wine" Amber	
			Approved by C I V C	

Code example:
FOUR HOLE + White + 80° light beam + 3000K + 4W = Code: L24.180BC3

FOUR HOLE Q


L25.

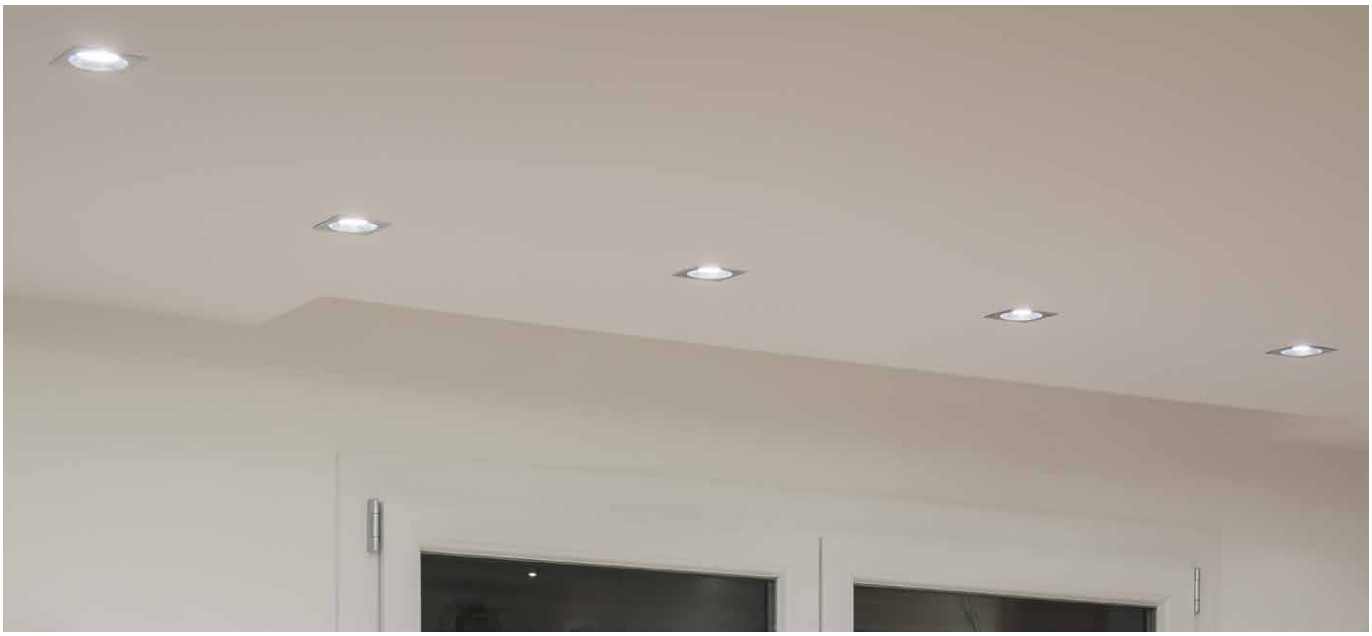

Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.


Power LED CRI>80
Power: 4W@350mA – 8W@500mA
Lumen: 540Lm@350mA – 864Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Dimming Accessories page 249

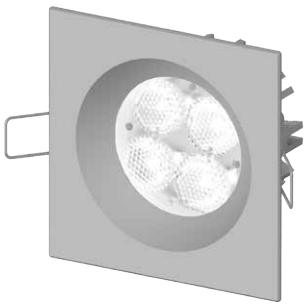

MADE IN ITALY



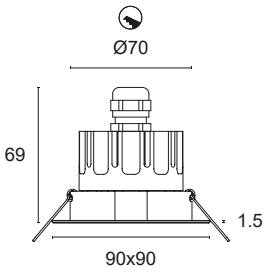

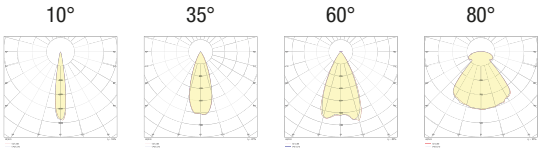

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L25.	**1** White	**10** 10°	**BN** 4000K	**3 4x1W - 350mA - 540 lm**
	2 Matt black	**35** 35°	**BC** 3000K	**5 4x2W - 500mA - 864 lm**
	5 Gloss aluminium	**60** 60°	**CC** 2700K	
	7 Brushed aluminium	**80** 80°	**BL** Blue	
			VE Green	
			RO Red	
			AM "Wine" Amber	
			Approved by C I V C	

Code example:
FOUR HOLE Q + White + 80° light beam + 3000K + 4W = Code: L25.180BC3

EGO METAL

L04.



Directional metal recessed light with COB LEDs CRI>90 for primary lighting in residential and retail environments.
Choice of secondary optics. Can be flush fitted indoors, spring-mounted


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY





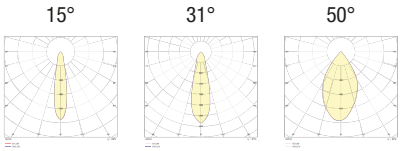

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L04.	**1** White	**15** 15°	**BN** 4000K
	2 Matt black	**31** 31°	**BC** 3000K
	6 Chrome	**50** 50°	**CC** 2700K
	7 Brushed aluminium		
	9 Polished gold		

Code example:
EGO METAL + Brushed Aluminium + 15° light beam + 2700K = Code: L04.715CC

EGO METAL Q


L05.



Directional square recessed light with COB LEDs CRI>90 for primary lighting in residential and retail environments.
Choice of secondary optics. Can be flush fitted indoors, spring-mounted


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY





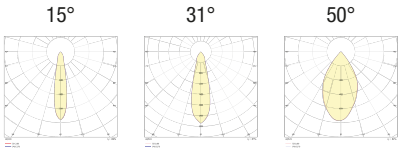

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L05.	**1** White	**15** 15°	**BN** 4000K
	2 Matt black	**31** 31°	**BC** 3000K
	6 Chrome	**50** 50°	**CC** 2700K
	7 Brushed aluminium		
	9 Polished gold		

Code example:
EGO METAL Q + Brushed Aluminium + 15° light beam + 2700K = Code: L05.715CC

REMOVE PLUS

L15P.



Flush-fitted in polished aluminium for accent, decoration and courtesy or emergency lighting. Even, diffuse lighting, can be installed indoors or outdoors. Mounting on plasterboard or brickwork with formwork.


SMD LED CRI>85
Power: 0.7W@24Vdc
Lumen: 100Lm@24Vdc
Constant voltage supply 24Vdc
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Installation accessories page 272
Dimming Accessories page 249




MADE IN ITALY



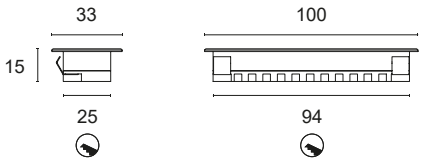

120°



BASIC CODES

L15P.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
REMOVE PLUS + Brushed aluminium + 3000K = Code: L15P.7BC

REMOVE MINUS


L15S.



Flush-fitted in polished aluminium for accent, decoration and courtesy or emergency lighting. Diffuse lighting, can be installed indoors, on plasterboard or brick with formwork.


SMD LED CRI>90
Power: 1.8W@24Vdc
Lumen: 135Lm@24Vdc
Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Installation accessories page 272
Dimming Accessories page 249




MADE IN ITALY



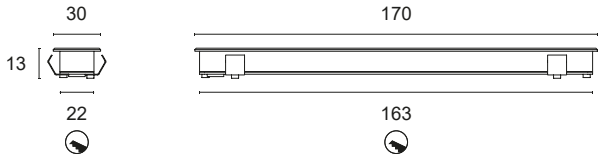

120°



BASIC CODES

L15S.

FINISHES


- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K


Code example:
REMOVE MINUS + Brushed aluminium + 3000K = Code: L15S.7BC

PAD
L13Q.

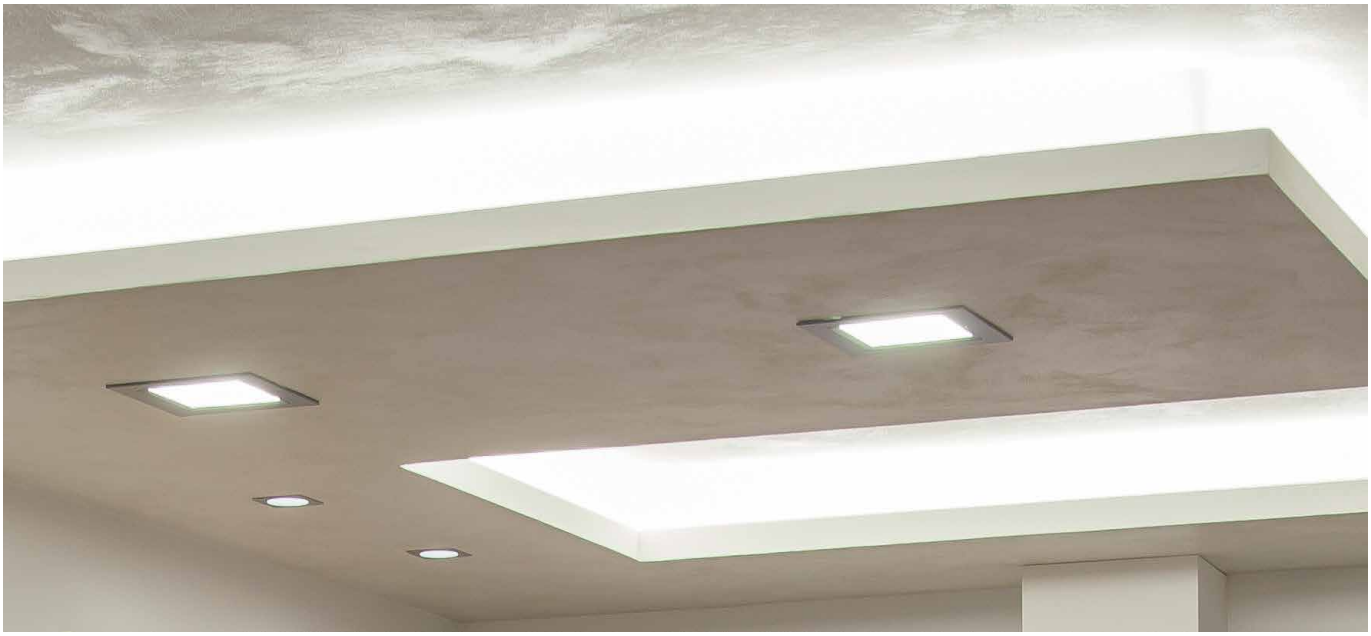

Polished aluminium recessed light for primary lighting in small rooms and accessories. Also suitable as a step marker or emergency light. Even, diffuse lighting, can be installed indoors.
Mounting with pressure springs or with formwork for plasterboard or masonry.


MID POWER LED CRI>80
Power: 3W@12Vdc
Lumen: 459Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable




Constant voltage power supplies page 236
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY





120°



BASIC CODES

L13Q.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
PAD + White + 3000K = Code: L13Q.1BC

ERMA

L13.




Flush-fitted in thermoplastic for accent and courtesy lighting. Also suitable as a step marker or emergency light.
Even, diffuse lighting, can be installed indoors on plasterboard or brick with standard 503 formwork (not included).


MID POWER LED CRI>80
Power: 1.5W@12Vdc
Lumen: 100Lm@12Vdc
Mains power supply included
Parallel connection, 20 cm cable


Constant voltage power supplies page 236
Dimming Accessories page 249



MADE IN ITALY



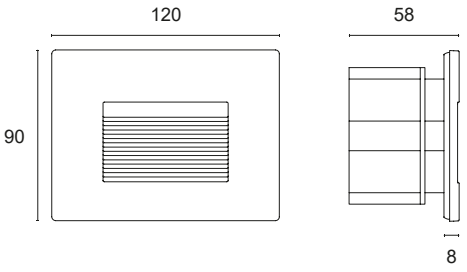



BASIC CODES	FINISHES	LED COLOUR
L13.	☐ **1** White	☐ **BN** 4000K
	■ **2** Matt black	☐ **BC** 3000K
	■ **7** Brushed aluminium	

Code example:
ERMA + White + 4000K = Code: L13.1BN





INDOOR AND OUTDOOR RECESSED LIGHTS

REMOVE PLUS WP 62
HOLLY 63
HALISSA 64
MEMO 65
DEHO 2 66
DEHO 3 67
DEHO 4 68
DEHO 5 69
DEHO Q 70
DARDO 2 71
DARDO 3 72
DARDO Q 73
ACSO 1 74
ACSO 2 75
ACSO 3 76
ACRUX 1 77

REMOVE PLUS WP

L15P.WP



Flush-fitted in polished aluminium for accent, decoration and courtesy or emergency lighting. Even, diffuse lighting, can be installed indoors or outdoors. Mounting on plasterboard or brickwork with formwork.


SMD LED CRI>85
Power: 0.7W@24Vdc
Lumen: 100Lm@24Vdc
Constant voltage supply 24Vdc
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Installation accessories page 272
Dimming Accessories page 249




MADE IN ITALY



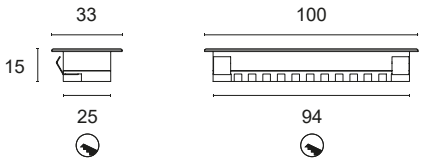

120°



BASIC CODES

L15P.WP

FINISHES


- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

Code example:
REMOVE PLUS WP + Brushed aluminium + 3000K = Code: L15P.WP7BC

HOLLY
L30R.

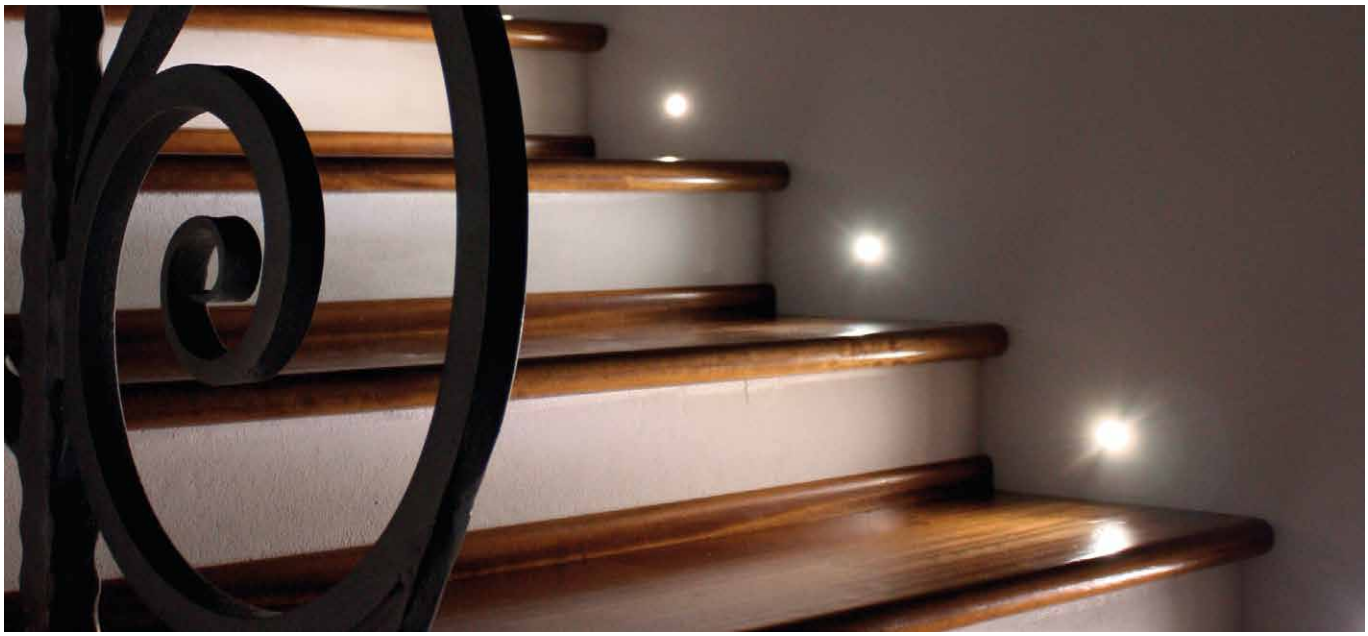

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork.


Power LED CRI>80
Power: 1W@350mA
Lumen: 135Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable




Constant current power supplies page 232
Installation accessories page 270
Dimming Accessories page 249

MADE IN ITALY





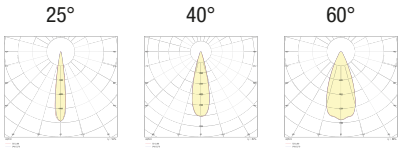

BASIC CODES

L30R.

LIGHT BEAM

- **25** 25°
- **40** 40°
- **60** 60°

GLASS

- **T** Transparent
- **S** Brushed

LED COLOUR


- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
HOLLY + Light beam 25°+ Transparent glass + 3000K = Code: L30R.25TBC

HALISSA

L30Q.

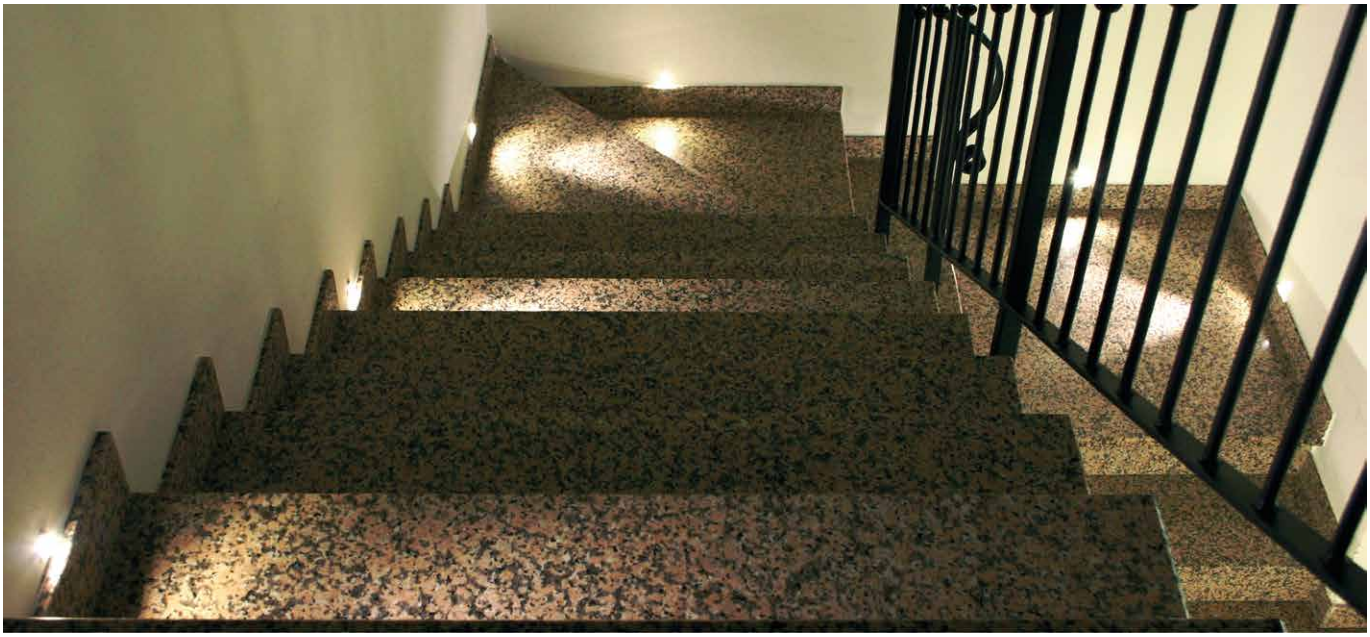

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork.


Power LED CRI>80
Power: 1W@350mA
Lumen: 135Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable




Constant current power supplies page 232
Installation accessories page 270
Dimming Accessories page 249

MADE IN ITALY






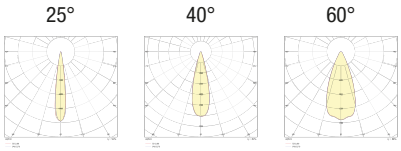

BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L30Q.	**25** 25°	**T** Transparent	**BN** 4000K
	40 40°	**S** Brushed	**BC** 3000K
	60 60°		**CC** 2700K
			BL Blue
			VE Green
			RO Red
			AM "Wine" Amber
			Approved by C I V C

Code example:
HALISSA + Light beam 25°+ Transparent glass + 3000K = Code: L30Q.25TBC

MEMO
L30S.

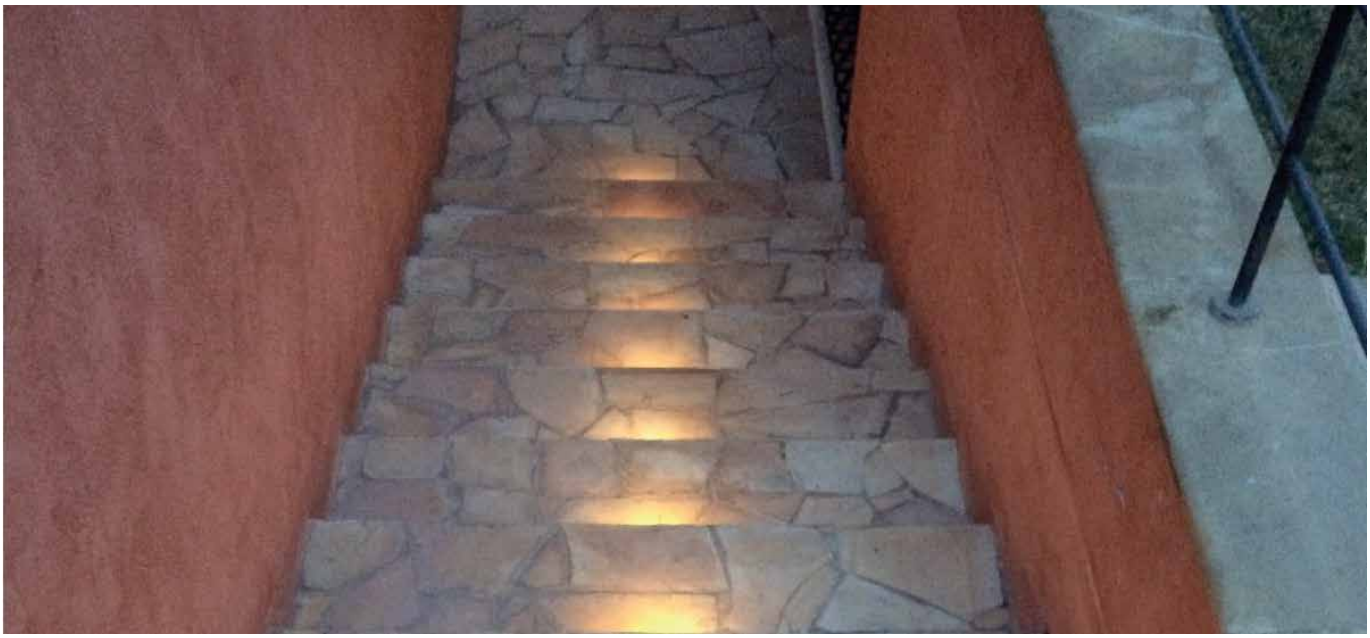

Flush-fitted in polished 304 stainless steel with power LED for decoration, courtesy or step marker lighting. Diffuse lighting with anti-glare cowling. Can be fitted in the wall or floor, indoors and outdoors.
Mounting with formwork.


Power LED CRI>80
Power: 1W@350mA
Lumen: 135Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable




Constant current power supplies page 232
Installation accessories page 270
Dimming Accessories page 249

MADE IN ITALY





120°




BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L30S.	**R1** Radial 1 aperture	**T** Transparent	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C

Code example:
MEMO + Radial light beam 1 aperture + Clear glass + 3000K = Code: L30S.R1TBC

DEHO 2

L402.

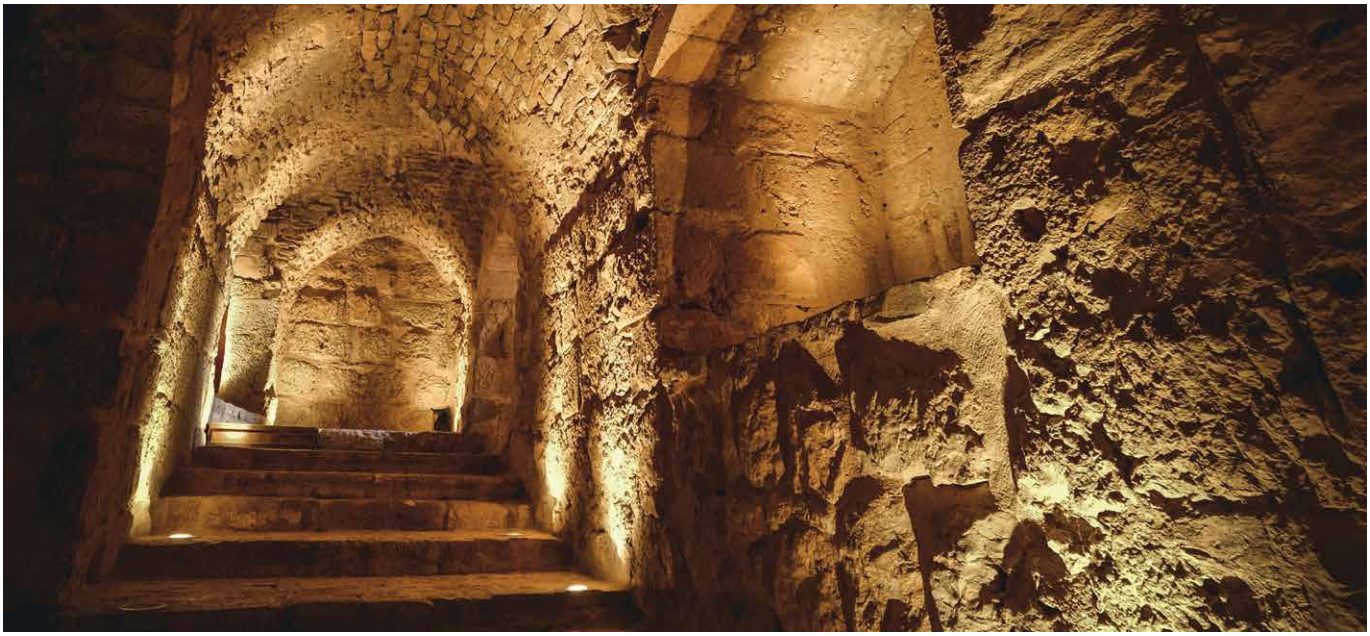

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable





Constant current power supplies page 232-233
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY

350mA 500mA





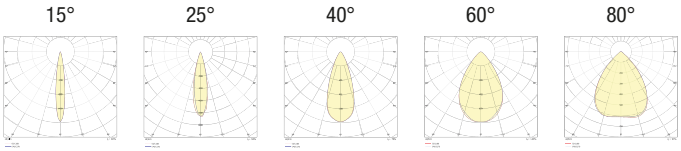

BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L402.	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**T** Transparent **S** Brushed	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 1x1W - 350mA - 135 lm** **5 1x2W - 500mA - 216 lm**

Code example:
DEHO 2 + Light Beam 25° + Clear Glass + 3000k +1W = Code: L402.25TBC3

DEHO 3

L403.




Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.


Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233
Installation accessories page 271
Dimming Accessories page 249



MADE IN ITALY






BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L403.	**R1** Radial 1 aperture	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 1x1W - 350mA - 135 lm** **5 1x2W - 500mA - 216 lm**

Code example:
DEHO 3 + radial light beam 1 aperture + 3000K + 1W = Code: L403.R1BC3

DEHO 4

L404.

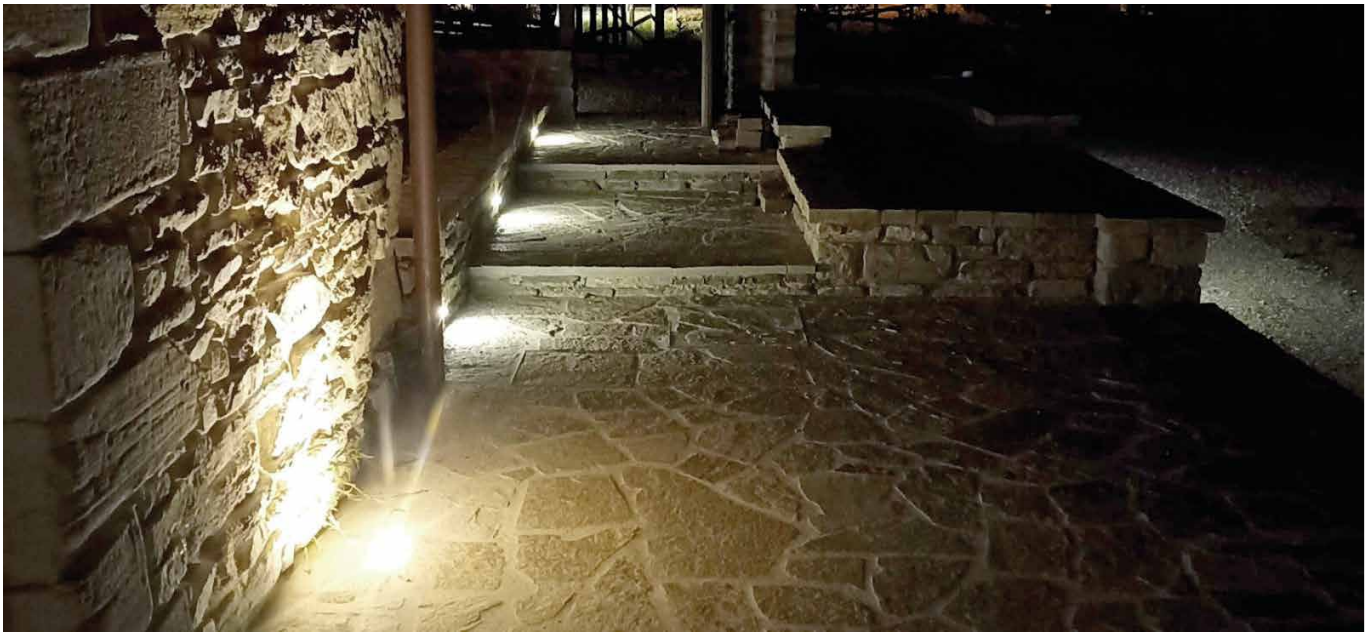


Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.


Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233
Installation accessories page 271
Dimming Accessories page 249



MADE IN ITALY






BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L404.	**R5** Radial 5 apertures	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 1x1W - 350mA - 135 lm** **5 1x2W - 500mA - 216 lm**

Code example:
DEHO 4 + radial light beam 5 apertures + 3000K + 1W = Code: L404.R5BC3

DEHO 5
L402B

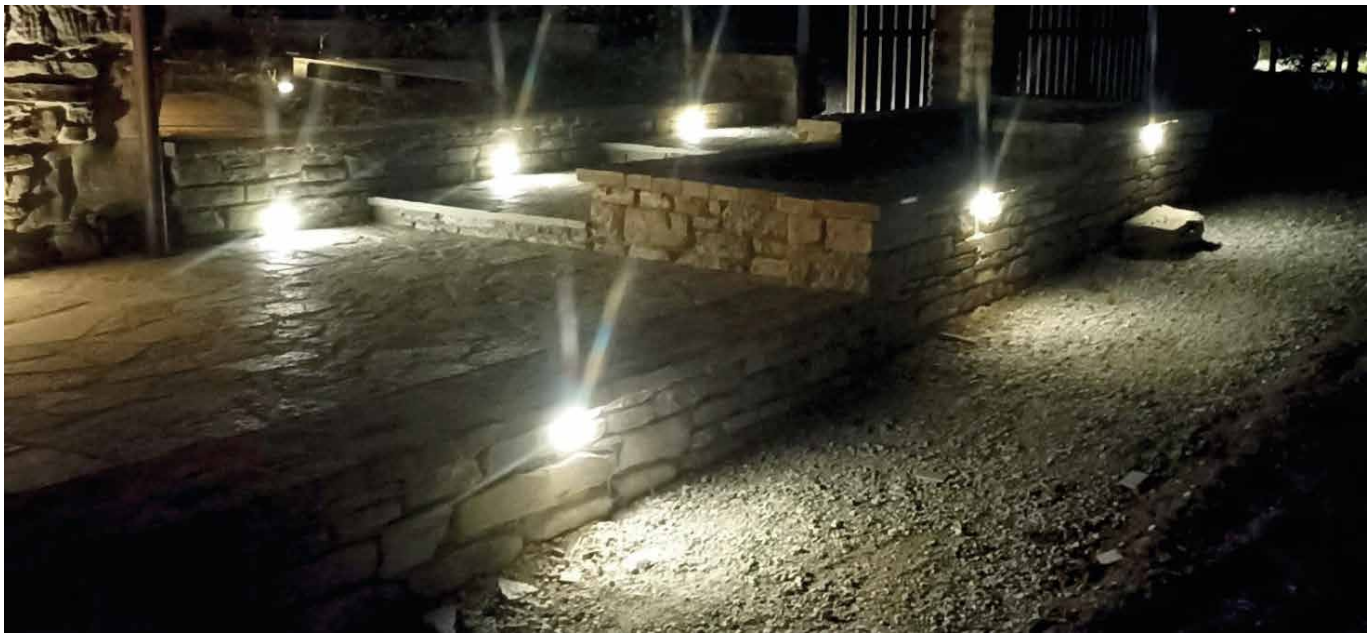


Flush-fitted in polished 304 stainless steel for decoration, courtesy and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.


Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233
Installation accessories page 271
Dimming Accessories page 249



MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L402B.	**R2** Radial 2 apertures	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 1x1W - 350mA - 135 lm** **5 1x2W - 500mA - 216 lm**

Code example:
DEHO 5 + radial light beam 2 apertures + 3000K + 1W = Code: L402B.R2BC3

DEHO Q

L405.




Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.


Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135Lm@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable




Constant voltage power supplies p. 232 - 233
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY





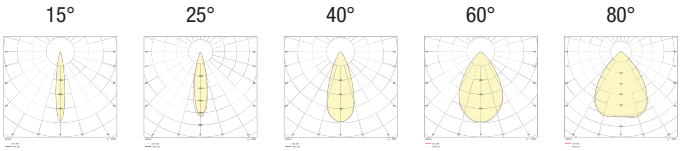

BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L405.	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**T** Transparent **S** Brushed	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 1x1W - 350mA - 135 lm** **5 1x2W - 500mA - 216 lm**

Code example:
DEHO Q + Light Beam 25° + Clear Glass 3000k +1W = Code: L405.25TBC3

DARDO 2

L502.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable





Constant voltage power supplies p. 232 - 233
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY

350mA 500mA

IP67 KG 0.12 D E



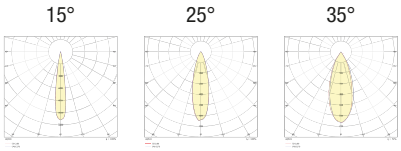

BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L502.	**15** 15° **25** 25° **35** 35°	**T** Transparent **S** Brushed	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 3x1W - 350mA - 405 lm** **5 3x2W - 500mA - 648 lm**

Code example:
DARDO 2 + Light Beam 2=15° + Clear Glass 3000k +3W = Code: L502.15TBC3

DARDO 3

L503.




Flush-fitted in polished 304 steel with powerful LEDs suitable for decorative lighting and as step markers. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.


Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233
Installation accessories page 271
Dimming Accessories page 249



MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L503.	**R5** Radial 5 apertures	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 3x1W - 350mA - 405 lm** **5 3x2W - 500mA - 648 lm**

Code example:
DARDO 3 + radial light beam 5 apertures + 3000K + 3W = Code: L503.R5BC3

DARDO Q

L504.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.


Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable




Constant voltage power supplies p. 232 - 233
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY

350mA 500mA



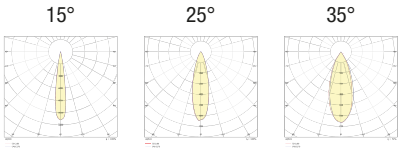

BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L504.	**15** 15° **25** 25° **35** 35°	**T** Transparent **S** Brushed	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 3x1W - 350mA - 405 lm** **5 3x2W - 500mA - 648 lm**

Code example:
DARDO Q + Light Beam 15° + Clear Glass + 3000k +3W = Code: L504.15TBC3

ACSO 1

L601.



Polished 304 steel recessed light with power LEDs for primary floor lighting of green areas and architectural facades.
Choice of secondary optics. Can be flush fitted indoors and outdoors
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 4W@350mA - 8W@500mA
Lumen: 540m@350mA - 864Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable




Constant voltage power supplies p. 232 - 233
Installation accessories page 270
Dimming Accessories page 249

MADE IN ITALY

350mA 500mA



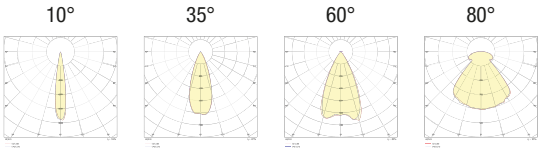


BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L601.	**10** 10° **35** 35° **60** 60° **80** 80°	**T** Transparent **S** Brushed	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 4x1W - 350mA - 540 lm** **5 4x2W - 500mA - 864 lm**

Code example:
ACSO 1 + Light Beam 35° + Clear Glass + 4000k +4W = Code: L601.35TBN3

ACSO 2

L602.

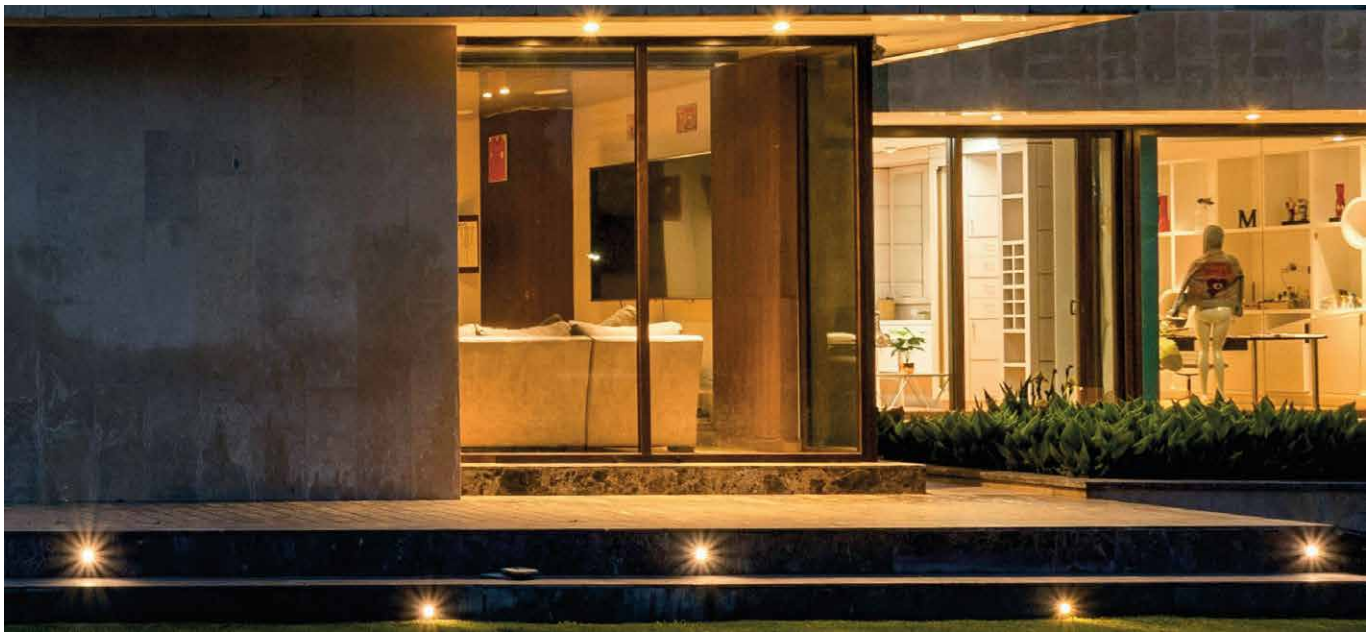

Flush-fitted in polished 304 stainless steel with power LED for accent and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.


Power LED CRI>80
Power: 4W@350mA - 8W@500mA
Lumen: 540m@350mA - 864Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233
Installation accessories page 270
Dimming Accessories page 249



MADE IN ITALY

350mA 500mA

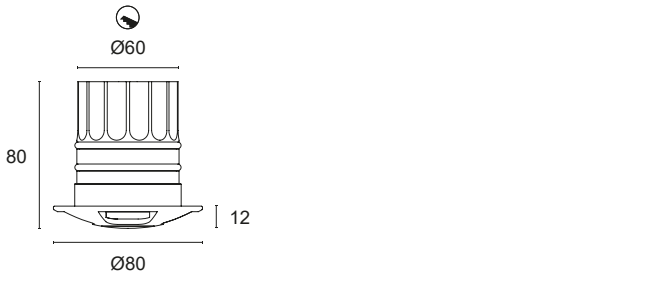

BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L602.	**R4** Radial 4 apertures	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 4x1W - 350mA - 540 lm** **5 4x2W - 500mA - 864 lm**

Code example:
ACSO 2 + radial light beam 4 apertures + 3000K + 4W = Code: L602.R4BC3

ACSO 3

L603.



Flush-fitted in polished 304 stainless steel with power LED for accent or step marker lighting. Asymmetrical optics.
Can be fitted in the floor indoors and outdoors, mounting with formwork.


Power LED CRI>80
Power: 1W@350mA - 2W@500mA
Lumen: 135m@350mA - 216Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant voltage power supplies p. 232 - 233
Installation accessories page 270
Dimming Accessories page 249



MADE IN ITALY

350mA 500mA

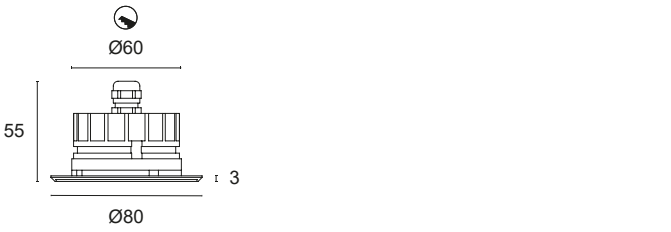



BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L603.	**40** 40° Asymmetric	**T** Transparent	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 1x1W - 350mA - 135 lm** **5 1x2W - 500mA - 216 lm**

Code example:
ACSO 3 + Light Beam 40° + Clear Glass 3000k +1W = Code: L603.40TBC3

ACRUX 1

L701.




Turned 304 steel recessed light with COB LEDs for primary floor lighting of green areas and architectural facades.
Choice of secondary optics. Can be flush fitted indoors and outdoors Mounting with formwork or ring with springs.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable

Constant voltage power supplies p. 234
Installation accessories page 270
Dimming Accessories page 249



MADE IN ITALY

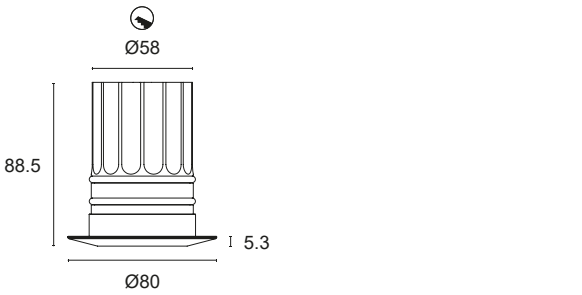



BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L701.	**12** 12°	**T** Transparent	**BN** 4000K
	24 24°	**S** Brushed	**BC** 3000K
			CC 2700K

Code example:
ACRUX 1 + Light Beam 12° + Clear Glass + 4000k = Code: L701.12TBC



316 L RECESSED LIGHTS

DEHO 1 L 80
DEHO 1 L Q 81
DEHO 2 L 82
DEHO 3 L 83
DEHO 4 L 84
DEHO 5 L 85
DEHO Q L 86

DEHO 1 L

L41L.




Recessed with heat sink and turned 316L stainless steel ring, WICOP LED for diffused accent, decoration, courtesy or step marker lighting. Opal diffuser. Can be fitted in the floor and on the wall indoors and outdoors, mounting with formwork.

WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable




Constant voltage power supplies page 236
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY



120°



BASIC CODES

L41L.

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:
DEHO 1 L + 4000K = Code: L41L.BN

DEHO 1 L Q

L41LQ.




Recessed with heat sink and turned 316L stainless steel ring, WICOP LED for diffused accent, decoration, courtesy or step marker lighting. Opal diffuser. Can be fitted in the floor and on the wall indoors and outdoors, mounting with formwork.


WICOP LED CRI>80
Power: 2W@12Vdc
Lumen: 216Lm@12Vdc
Constant 12Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 236
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY





BASIC CODES

L41LQ.

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

Code example:
DEHO 1 L Q + 4000K = Code: L41LQ.BN

DEHO 2 L

L402L.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.


Power LED CRI>80
Power: 1.6W@24Vdc
Lumen: 132Lm@24Vdc
Constant 24Vdc voltage supply
Parallel connection, 50 cm cable




Constant voltage power supplies page 237
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY







BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L402L.	**25** 25°	**T** Transparent	**BN** 4000K
	40 40°	**S** Brushed	**BC** 3000K
			CC 2700K

Code example:
DEHO 2 L+ Light Beam 25° + Clear Glass + 3000k = Code: L402L.25TBC

DEHO 3 L

L403L.




Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy and step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.


Power LED CRI>80
Power: 1.6W@24Vdc
Lumen: 132Lm@24Vdc
Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR
L403L.	**R1** Radial 1 aperture	**BN** 4000K **BC** 3000K **CC** 2700K

Code example:
DEHO 3 L + radial light beam 1 aperture + 3000K = Code: L403L.R1BC

DEHO 4 L

L404L.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy and step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.


Power LED CRI>80
Power: 1.6W@24Vdc
Lumen: 132Lm@24Vdc
Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR
L404L.	**R5** Radial 5 apertures	☐ **BN** 4000K ☐ **BC** 3000K ☐ **CC** 2700K

Code example:
DEHO 4 L + radial light beam 5 aperture + 3000K = Code: L404L.R5BC

DEHO 5 L

L402BL.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy and step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.


Power LED CRI>80
Power: 1.6W@24Vdc
Lumen: 132Lm@24Vdc
Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR
L402BL.	**R2** Radial 2 apertures	**BN** 4000K **BC** 3000K **CC** 2700K

Code example:
DEHO 5 L + radial light beam 2 apertures + 3000K = Code: L402BL.R2BC

DEHO Q L

L405L.



Recessed light with polished 316L stainless steel ring and anticorodal anodised aluminium heat sink, power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.


Power LED CRI>80
Power: 1.6W@24Vdc
Lumen: 132Lm@24Vdc
Constant 24Vdc voltage supply
Parallel connection, 50 cm cable




Constant voltage power supplies page 237
Installation accessories page 271
Dimming Accessories page 249

MADE IN ITALY







BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L405L.	**25** 25°	**T** Transparent	**BN** 4000K
	40 40°	**S** Brushed	**BC** 3000K
			CC 2700K

Code example:
DEHO Q L+ Light Beam 25° + Clear Glass + 3000k = Code: L405L.25TBC





PROJECTORS

DUVAR 90
VERTIGO 91
ZEPPELIN 92

DUVAR

L23.



Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for decorative, accent, courtesy and general lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base or stake.


Power LED CRI>80
Power: 3W@350mA - 6W@500mA
Lumen: 405Lm@350mA - 648Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

Constant current power supplies page 232-233
Installation accessories page 272
Dimming Accessories page 249



MADE IN ITALY



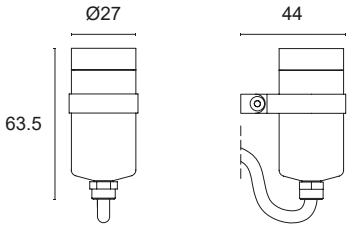



BASIC CODES

L23.

FINISHES

- **2** Matt black
- **7** Brushed aluminium

LIGHT BEAM

- **15** 15°
- **25** 25°
- **35** 35°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

POWER

3 3x1W - 350mA - 405 lm
5 3x2W - 500mA - 648 lm

Code example:
DUVAR + Brushed Aluminium + 15° light beam + 4000K + 3W = Code: L23.715BN3

VERTIGO

L14.



Directional projector in anticorodal anodised or decorated aluminium with COB LEDs CRI>90. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.


Power LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 234
Dimming Accessories page 249



MADE IN ITALY



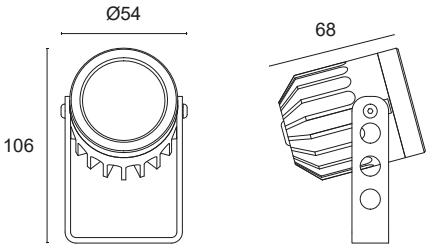



BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR
L14.	**2** Matt black	**12** 12°	**BN** 4000K
	7 Brushed aluminium	**24** 24°	**BC** 3000K
			CC 2700K
		10 10°	**AM** "Wine" Amber
		35 35°	Approved by C I V C
		60 60°	**3** 4x1W - 350mA
		80 80°	**5** 4x2W - 500mA

Code example:
VERTIGO + Brushed Aluminium + 12° light beam + 4000K + 3W = Code: L14.712BN

ZEPPELIN

L06.



Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.

Power LED CRI>80
Power: 9W@350mA - 18W@500mA
Lumen: 1215Lm@350mA - 1944Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 232-233
Dimming Accessories page 249




MADE IN ITALY

350mA 500mA



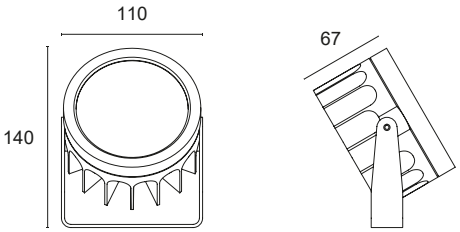

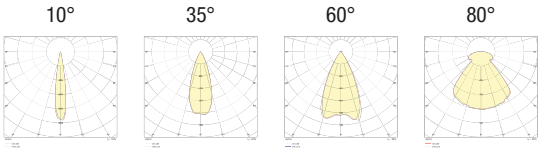

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L06.	**2** Matt black **7** Brushed aluminium	**10** 10° **35** 35° **60** 60° **80** 80°	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3 9x1W - 350mA - 1215 lm** **5 9x2W - 500mA - 1944 lm**

Code example:
ZEPPELIN + Matt black + Light beam 10° + 3000K + 9W = Code: L06.210BC3





DECORATIVE TECHNICAL LIGHTING

PIXEL 1 96
ROMY 97
SARY 98
ISA 99
LILLY 100
EVA 101
LINEA 102
QUADRA Q1 103
QUADRA Q2 104
QUADRA Q3 105
QUADRA Q4 106
QUADRA R1 107
QUADRA R2 108
QUADRA R3 109
REM 110
CISO P31 CEILING LIGHT 111
CISO P33 CEILING LIGHT 112
CISO P50 CEILING LIGHT 113
CISO P80 CEILING LIGHT 114
CISO S31 PENDANT LIGHT 115
CISO S33 PENDANT LIGHT 116
CISO S50 PENDANT LIGHT 117
CISO S80 PENDANT LIGHT 118
CEILING ROSES FOR OTHER CISO COMPOSITIONS 119


PIXEL 1

F10.




Directional lamp in polished, flexible aluminium suitable for reading, decoration or courtesy lighting. Choice of secondary optics, can be installed indoors. Screw mounting with base or on wall.

Power LED CRI>80
Power: 1W@350mA
Lumen: 135Lm@350mA
350mA constant current power supply
Constant current power supply included

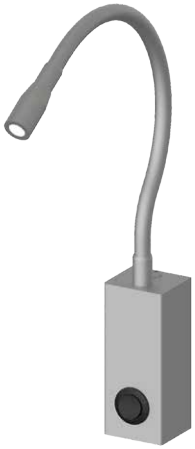



MADE IN ITALY

F10. base w/box



F10. flat base





BASIC CODES

F10.

FINISHES

- **6** Chrome
- **7** Brushed aluminium

LIGHT BEAM

- **25** 25°
- **40** 40°
- **60** 60°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

BASE W/BOX AND SWITCH

BX without switch
BB with white switch
BB with black switch

FLAT BASE AND SWITCH

PX without switch
PB with white switch
PN with black switch

Code example:
PIXEL 1 + Brushed aluminium + Light beam 25°+ 3000K + Flat base white switch = Code: F10.725BCPB


ROMY

ROMY.





Mirror lamp made entirely of decorated aluminium. Suitable for frame application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio.

LED SMD2835 CRI>90
Power: 16.8W/m
Lumen: 1900 - 2000 lm/m
Constant voltage supply 24Vdc
Power supply included and built in

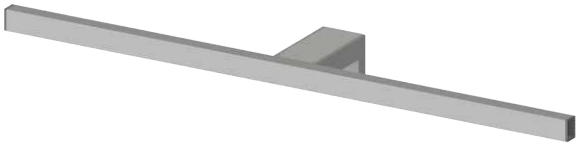


MADE IN ITALY



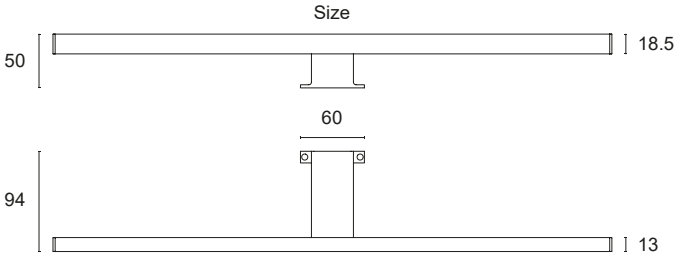

120°



BASIC CODES	FINISHES	SIZE	LED COLOUR
ROMY.	**1** White	**A** 320mm 5W 660 lm	**BN** 4000K
	2 Matt black	**B** 520mm 8W 1100 lm	**BC** 3000K
	5 Gloss aluminium		**CC** 2700K
	6 Chrome		
	7 Brushed aluminium		

Code example:
ROMY + Chrome + 320mm + 4000K = Code: ROMY.6ABN


SARY

SARY.





Mirror lamp made entirely of decorated aluminium. Suitable for frame application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio.

LED SMD2835 CRI>90
Power: 20.2W/m
Lumen: 2100 - 2500 lm/m
Constant voltage supply 24Vdc
Power supply included and remote

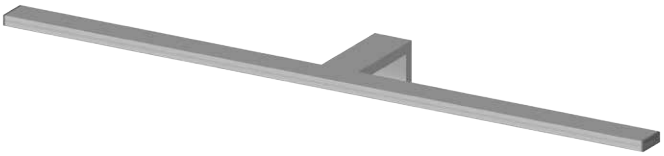


MADE IN ITALY



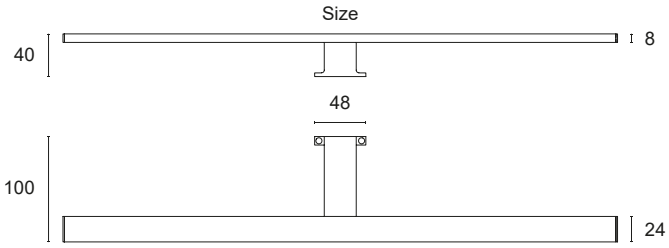

120°



BASIC CODES	FINISHES	SIZE	LED COLOUR
SARY.	**1** White	**A** 320mm 6W 750 lm	**BN** 4000K
	2 Matt black	**B** 520mm 10W 1250 lm	**BC** 3000K
	6 Chrome		**CC** 2700K
	7 Brushed aluminium		

Code example:
SARY + Chrome + 320mm + 4000K = Code: SARY.6ABN

ISA

ISA.





Mirror lamp made entirely of decorated aluminium and steel. Suitable for wall application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio.

LED SMD2835 CRI>90
Power: 20.2W/m
Lumen: 2100 - 2500 lm/m
Constant voltage supply 24Vdc
Power supply included and built in




MADE IN ITALY



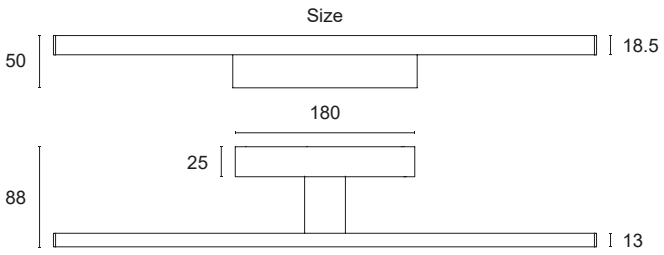

120°



BASIC CODES	FINISHES	SIZE	LED COLOUR
ISA.	**1** White	**A** 610mm 12W 1500 lm	**BN** 4000K
	2 Matt black	**B** 810mm 16W 2000 lm	**BC** 3000K
	6 Chrome	**C** 1010mm* 20W 2500 lm	**CC** 2700K
	7 Brushed aluminium	*(chrome finish not available)	

Code example:
ISA + Chrome + 610mm + 4000K = Code: ISA.6ABN

LILLY
LILLY.





Mirror lamp made entirely of decorated aluminium. Suitable for application on mirrors, can be installed in partially protected indoor areas. Excellent lumen/watt ratio. Mounting with clips on mirror.

LED SMD2835 CRI>90
Power: 20.2W/m
Lumen: 2100 - 2500 lm/m
Constant voltage supply 24Vdc
Power supply included and remote




MADE IN ITALY





120°



BASIC CODES	FINISHES	SIZE	LED COLOUR
LILLY.	☐ **1** White ■ **2** Matt black ▒ **5** Gloss aluminium ▒ **6** Chrome ▒ **7** Brushed aluminium	**A** 330mm 6W 780 lm	☐ **BN** 4000K ▒ **BC** 3000K ▒ **CC** 2700K

Code example:
LILLY + Chrome + 330mm + 4000K = Code: LILLY.6ABN


EVA

L33.





Dual-emission lamp in polished aluminium for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base.


Power LED CRI>80
Power: 2W+2W@500mA
Lumen: 216+216Lm@500mA
500mA constant current power supply
Power supply included and built in.

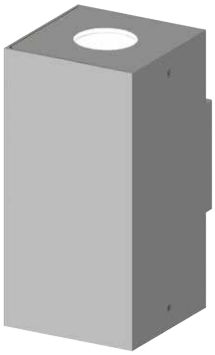

MADE IN ITALY





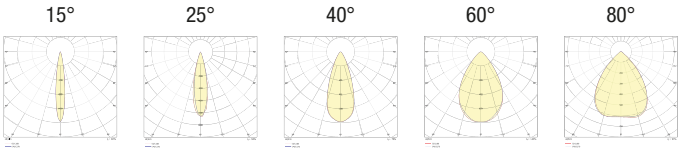

BASIC CODES

L33.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

1st LIGHT BEAM

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

2nd LIGHT BEAM

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR


- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
EVA + Matt black + 1st light beam 15°+ 2nd light beam 40°+ 4000K = Code: L33.21540BN


LINEA

L1.

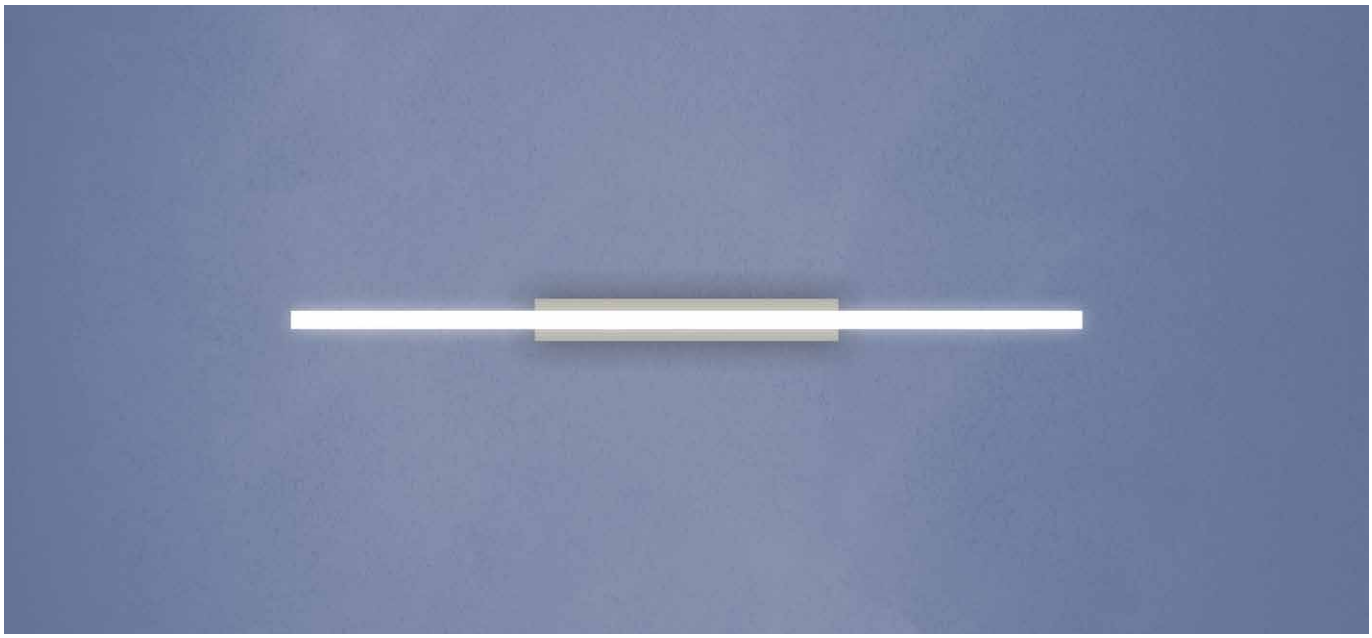



Linear ceiling lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90
Power: 20.2W/m
Lumen: 2100 - 2500 lm/m
Constant voltage supply 24Vdc
Power supply included and built in

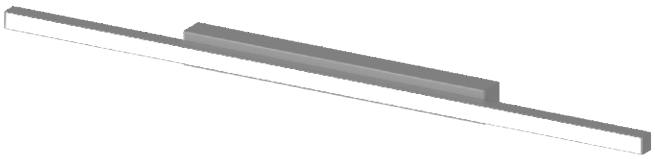


MADE IN ITALY



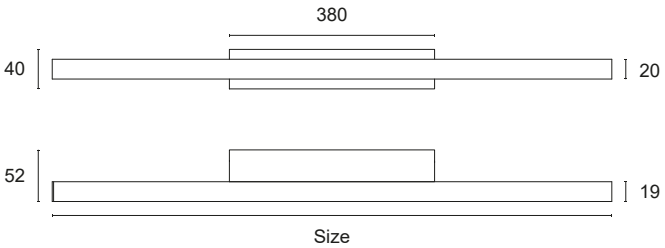

120°




BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	SIZE	LED COLOUR	DIFFUSER
L1.	**1** White	**1** White	**F** 800mm 16W 2000 lm	**BN** 4000K	**M** MICROPRISMATIC
	2 Matt black	**2** Matt black	**G** 930mm 19W 2325 lm	**BC** 3000K	**S** BRUSHED
	7 Brushed aluminium	**7** Brushed aluminium	**H** 1010mm 20W 2525 lm	**CC** 2700K	
			I 1220mm 24W 3050 lm		POWER SUPPLY
			L 1480mm 30W 3700 lm		**N** ON/OFF
			M 1810mm 36W 4525 lm		**P** PUSH
			N 2020mm 40W 5050 lm		**D** DALI

Code example:
LINEA + White ceiling rose + brushed aluminium profile + 1010mm + 4000K + Microprismatic diffuser + DALI = Code: L1.17HBNMD


QUADRA Q1

Q.QY1.

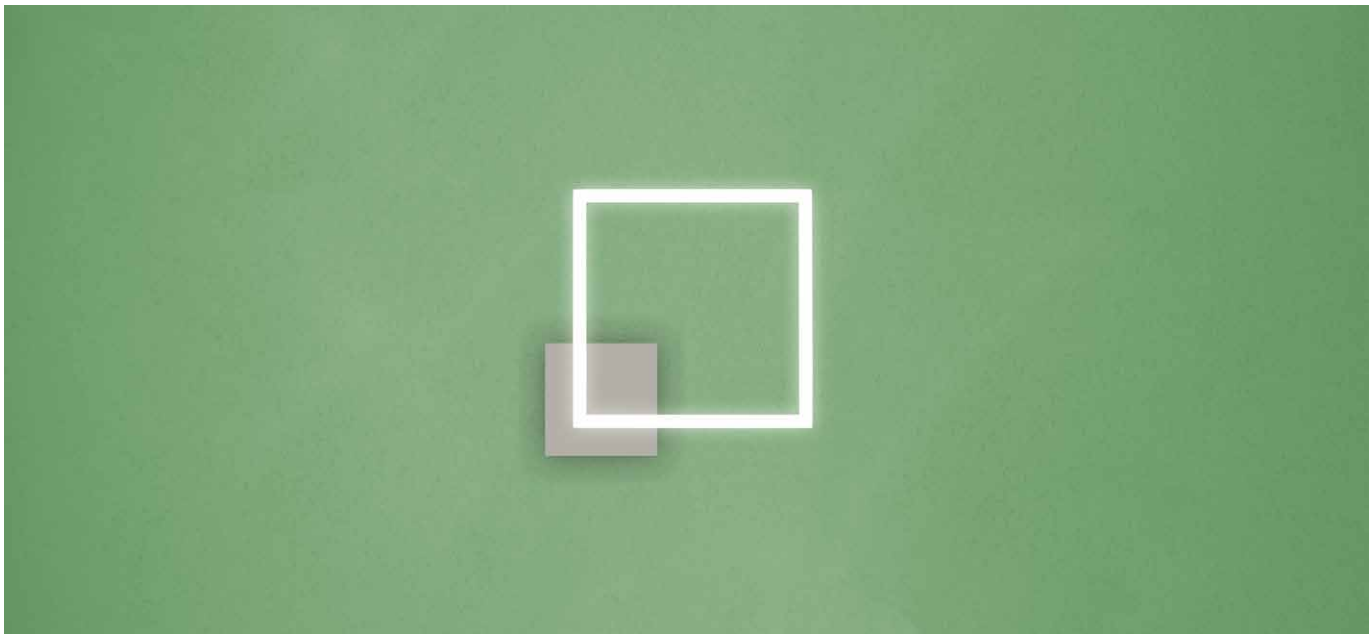



Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90
Power: 27W
Lumen: 3200 lm
Constant voltage supply 24Vdc
Power supply included and built in




MADE IN ITALY





120°




BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	LED COLOUR	DIFFUSER	POWER SUPPLY
Q.QY1.	**1** White	**1** White	**BN** 4000K	**M** MICROPRISMATIC	**N** ON/OFF
	2 Matt black	**2** Matt black	**BC** 3000K	**S** BRUSHED	**P** PUSH
	7 Brushed aluminium	**7** Brushed aluminium	**CC** 2700K		**D** DALI

Code example:
QUADRA Q1 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY1.17BNMD


QUADRA Q2

Q.QY2.

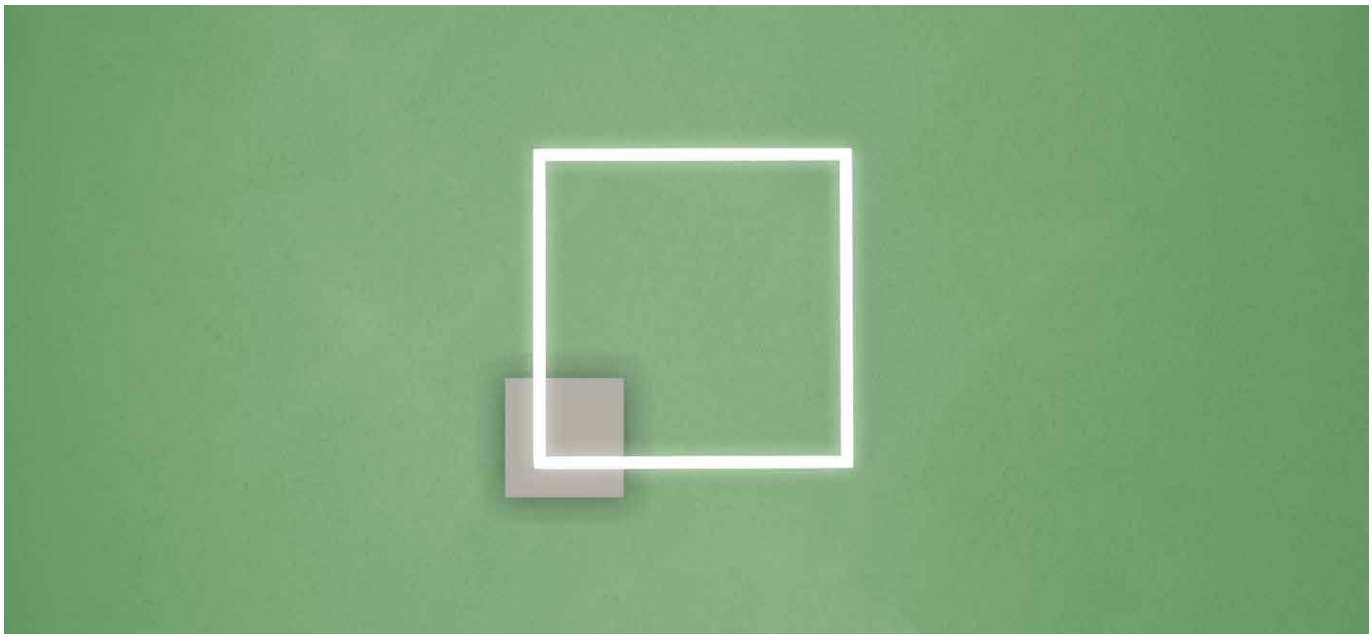



Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90
Power: 40W
Lumen: 4800 lm
Constant voltage supply 24Vdc
Power supply included and built in




MADE IN ITALY





120°




BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	LED COLOUR	DIFFUSER	POWER SUPPLY
Q.QY2.	**1** White	**1** White	**BN** 4000K	**M** MICROPRISMATIC	**N** ON/OFF
	2 Matt black	**2** Matt black	**BC** 3000K	**S** BRUSHED	**P** PUSH
	7 Brushed aluminium	**7** Brushed aluminium	**CC** 2700K		**D** DALI

Code example:
QUADRA Q2 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY2.17BNMD


QUADRA Q3

Q.QY3.

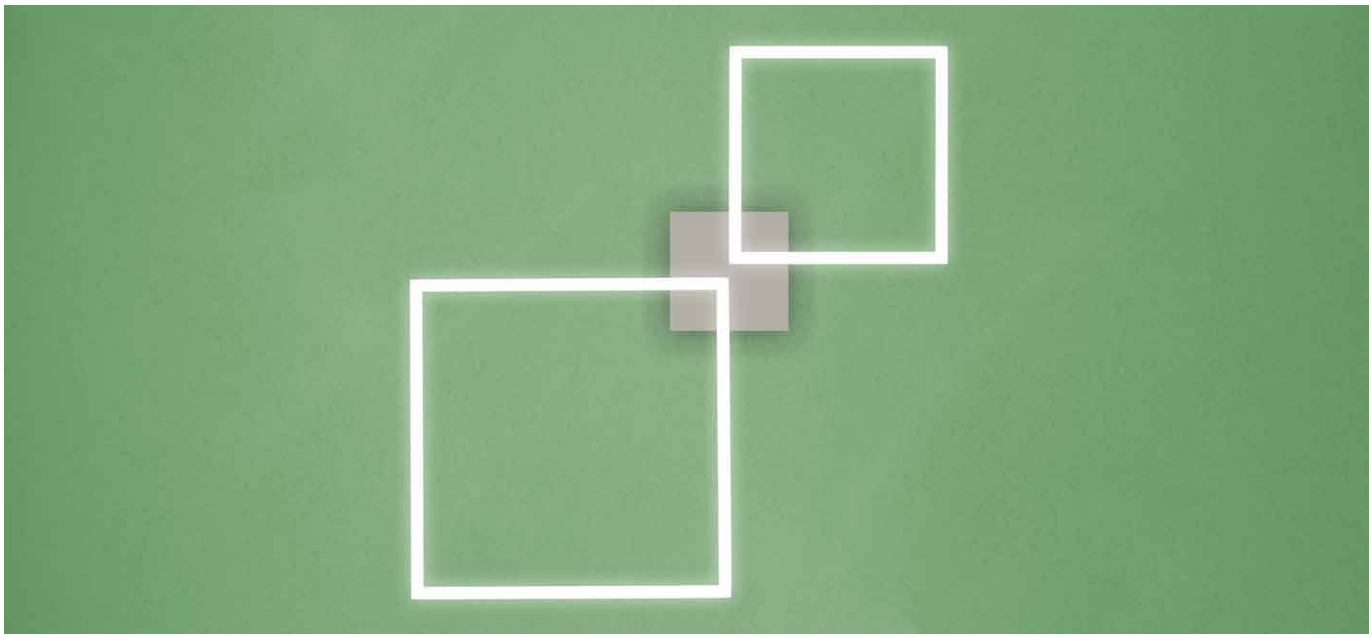


Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.


LED SMD2835 CRI>90
Power: 67W
Lumen: 8000 lm
Constant voltage supply 24Vdc
Power supply included and built in

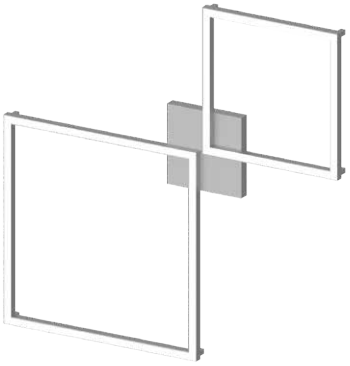

MADE IN ITALY

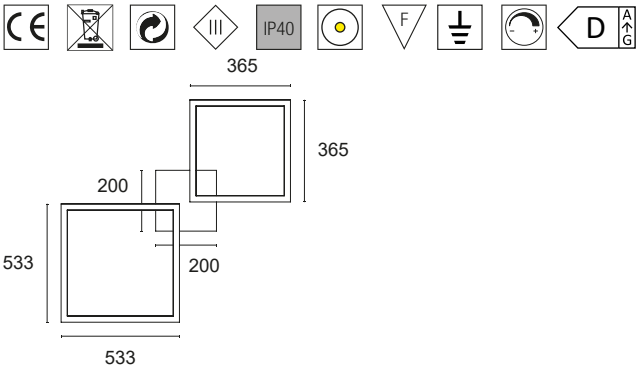

120°




BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	LED COLOUR	DIFFUSER	POWER SUPPLY
Q.QY3.	☐ **1** White	☐ **1** White	☐ **BN** 4000K	**M** MICROPRISMATIC	**N** ON/OFF
	■ **2** Matt black	■ **2** Matt black	☐ **BC** 3000K	**S** BRUSHED	**P** PUSH
	■ **7** Brushed aluminium	■ **7** Brushed aluminium	☐ **CC** 2700K		**D** DALI

Code example:
QUADRA Q3 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY3.17BNMD


QUADRA Q4

Q.QY4.

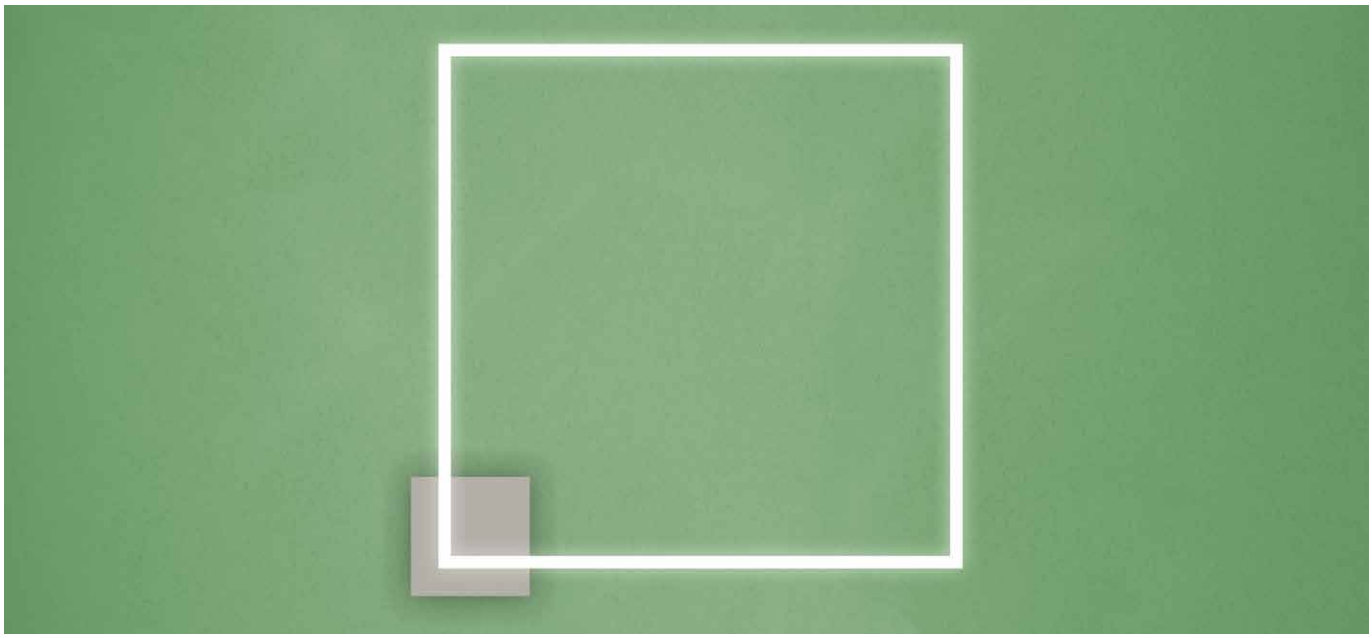



Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90
Power: 67W
Lumen: 8000 lm
Constant voltage supply 24Vdc
Power supply included and built in

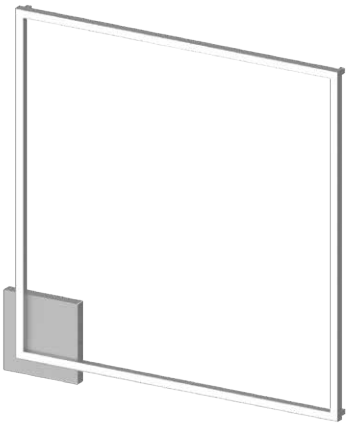


MADE IN ITALY





120°




BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	LED COLOUR	DIFFUSER	POWER SUPPLY
Q.QY4.	**1** White	**1** White	**BN** 4000K	**M** MICROPRISMATIC	**N** ON/OFF
	2 Matt black	**2** Matt black	**BC** 3000K	**S** BRUSHED	**P** PUSH
	7 Brushed aluminium	**7** Brushed aluminium	**CC** 2700K		**D** DALI

Code example:
QUADRA Q4 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.QY4.17BNMD


QUADRA R1

Q.RY1.

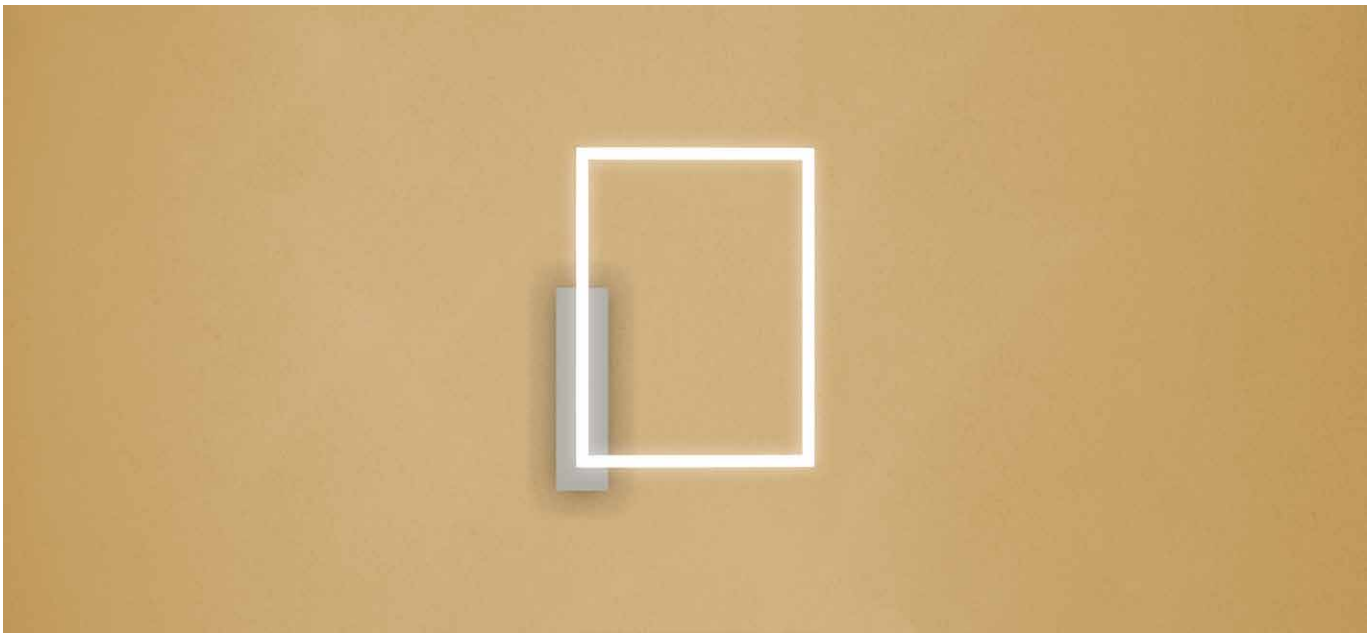



Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90
Power: 33W
Lumen: 4000 lm
Constant voltage supply 24Vdc
Power supply included and built in




MADE IN ITALY





120°




BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	LED COLOUR	DIFFUSER	POWER SUPPLY
Q.RY1.	**1** White	**1** White	**BN** 4000K	**M** MICROPRISMATIC	**N** ON/OFF
	2 Matt black	**2** Matt black	**BC** 3000K	**S** BRUSHED	**P** PUSH
	7 Brushed aluminium	**7** Brushed aluminium	**CC** 2700K		**D** DALI

Code example:
QUADRA R1 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.RY1.17BNMD


QUADRA R2

Q.RY2.

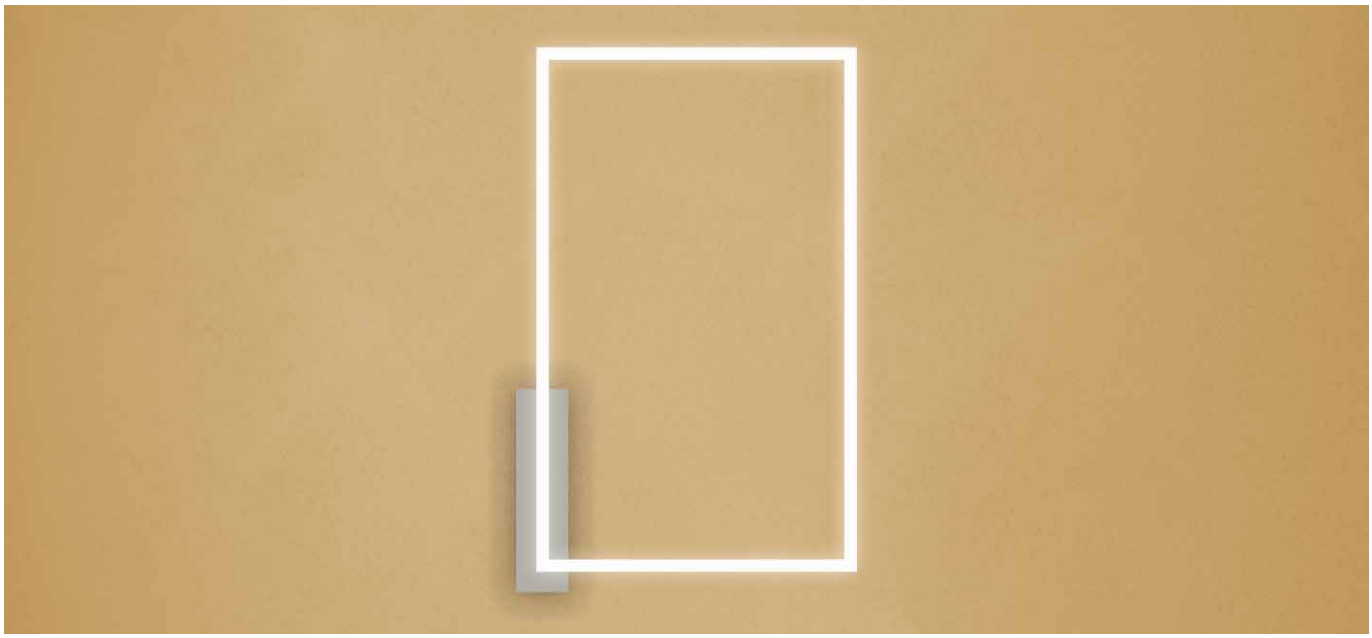



Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90
Power: 53W
Lumen: 6300 lm
Constant voltage supply 24Vdc
Power supply included and built in

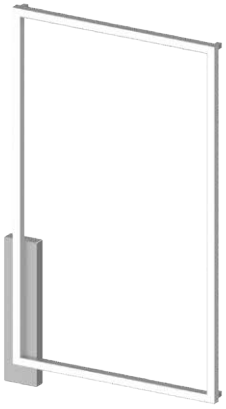


MADE IN ITALY





120°




BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	LED COLOUR	DIFFUSER	POWER SUPPLY
Q.RY2.	**1** White	**1** White	**BN** 4000K	**M** MICROPRISMATIC	**N** ON/OFF
	2 Matt black	**2** Matt black	**BC** 3000K	**S** BRUSHED	**P** PUSH
	7 Brushed aluminium	**7** Brushed aluminium	**CC** 2700K		**D** DALI

Code example:
QUADRA R2 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.RY2.17BNMD


QUADRA R3

Q.RY3.

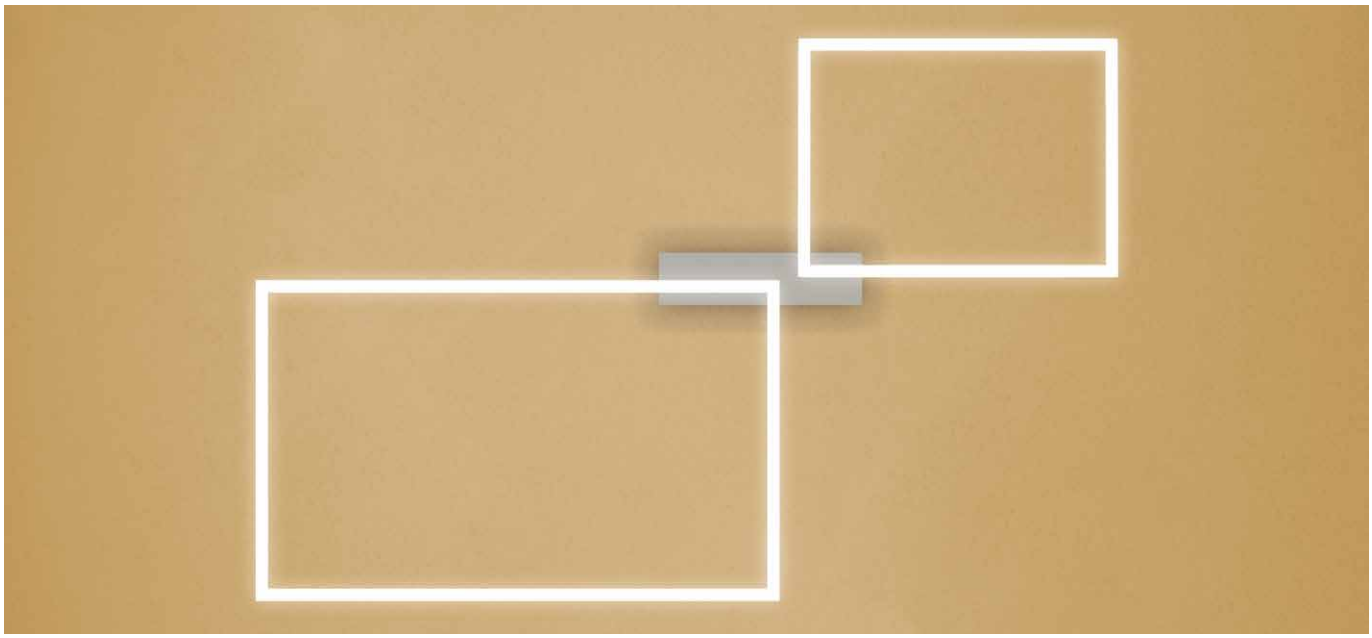



Design lamp made entirely of decorated aluminium. Suitable as primary lighting in residential, commercial and communal spaces. Excellent lumen/watt ratio. Can be ceiling or wall mounted with screw-fixed base.

LED SMD2835 CRI>90
Power: 87W
Lumen: 10500 lm
Constant voltage supply 24Vdc
Power supply included and built in

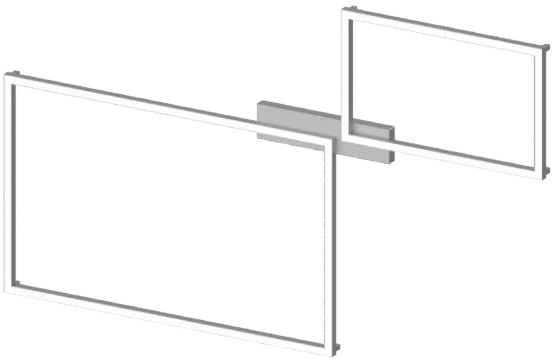


MADE IN ITALY



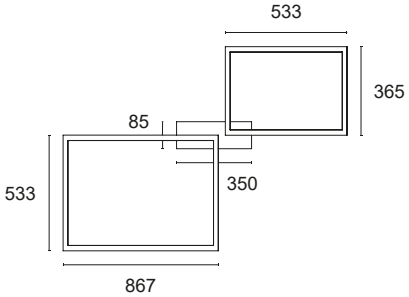

120°



BASIC CODES	CEILING ROSE FINISHES	PROFILE FINISHES	LED COLOUR	DIFFUSER	POWER SUPPLY
Q.RY3.	**1** White	**1** White	**BN** 4000K	**M** MICROPRISMATIC	**N** ON/OFF
	2 Matt black	**2** Matt black	**BC** 3000K	**S** BRUSHED	**P** PUSH
	7 Brushed aluminium	**7** Brushed aluminium	**CC** 2700K		**D** DALI

Code example:
QUADRA R3 + White ceiling rose + brushed aluminium profile + 4000K + Microprismatic diffuser + DALI = Code: Q.RY3.17BNMD

REM
RG32.




Ø32mm decorated aluminium directional projector decorated with power LEDs for spot, decorative, reading or courtesy lighting. Choice of secondary optics, can be installed indoors. Mounting with concealed insert.


Power LED CRI>90
Power: 2W@500mA - 6W@500mA
Lumen: 216Lm@500mA - 648Lm@500mA
500mA constant current power supply
Series connection, 50 cm cable


Constant current power supplies page 233
Dimming Accessories page 249



MADE IN ITALY





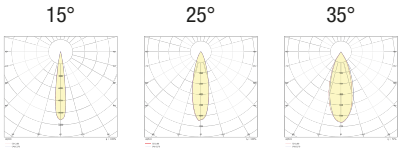

BASIC CODES

RG32.

MEASUREMENTS

- **A** Ø32 - H 130mm
- **B** Ø32 - H 145mm

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **9** Polished gold

LIGHT BEAM

- **15** 15°
- **25** 25°
- **35** 35°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

POWER

- **3** 1x2W 500mA - 216 lm
- **5** 3x2W 500mA - 648 lm

Code example:
REM + H130mm + White + Light Beam 15° + 4000K + 2W = Code: RG32.A115BN3

CISO P31 CEILING LIGHT

P31.



Ø32mm decorated aluminium cylinder ceiling light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors.
Mounting with concealed base.


Power LED CRI>90
Power: 2W@500mA
Lumen: 216Lm@500mA
500mA constant current power supply
Power supply included and remote


Constant current power supplies page 233
Dimming Accessories page 249



MADE IN ITALY

Size



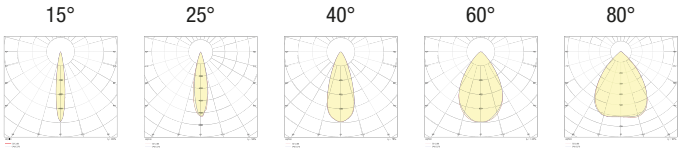

BASIC CODES

P31.

SIZE

- **A** H 90mm
- **B** H 180mm
- **C** H 290mm
- **D** H 470mm
- **E** H 760mm

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

LIGHT BEAM

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
CISO P31 CEILING LIGHT + H470mm + White + Light Beam 15° + 4000K = Code: P31.D115BN

CISO P33 CEILING LIGHT

P33.



Ø32mm decorated aluminium cylinder ceiling light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>90
Power: 6W@500mA
Lumen: 648Lm@500mA
500mA constant current power supply
Power supply included and remote

Constant current power supplies page 233
Dimming Accessories page 249




MADE IN ITALY

IP40

Size

Ø32

15° 25° 35°



BASIC CODES

P33.

SIZE

- **A** H 90mm
- **B** H 180mm
- **C** H 290mm
- **D** H 470mm
- **E** H 760mm

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

LIGHT BEAM

- **15** 15°
- **25** 25°
- **35** 35°

LED COLOUR


- **BN** 4000K
- **BC** 3000K
- **CC** 2700K
- **BL** Blue
- **VE** Green
- **RO** Red
- **AM** "Wine" Amber

Approved by C I V C

Code example:
CISO P33 CEILING LIGHT + H470mm + White + Light Beam 15° + 4000K = Code: P33.D115BN

CISO P50 CEILING LIGHT

P50.

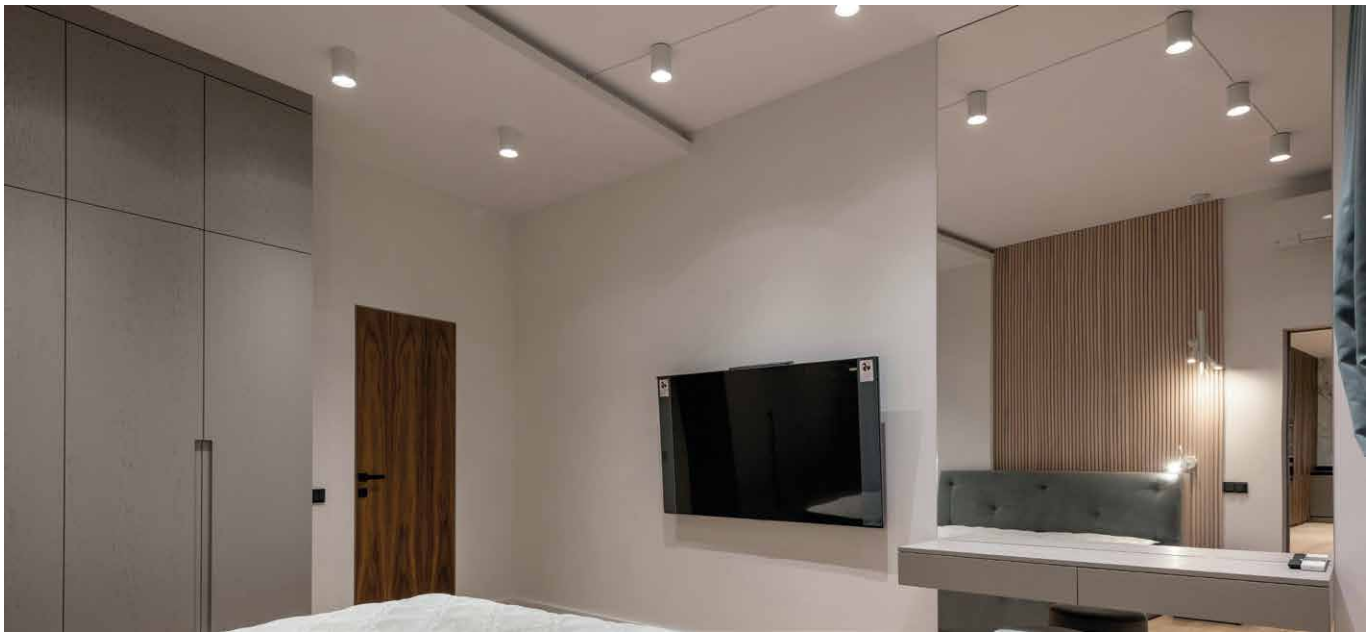

Ø50mm decorated aluminium cylinder ceiling light with power COB LEDs, suitable as accent or primary lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors.
Mounting with concealed base.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Power supply included and integrated

Dimming Accessories page 249



MADE IN ITALY

Size





BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR
P50.	**B** H 180mm*	**1** White	**18** 18°	**BN** 4000K
	C H 290mm	**2** Matt black	**28** 28°	**BC** 3000K
	D H 470mm	**5** Gloss aluminium	**47** 47°	**CC** 2700K
	E H 760mm	**7** Brushed aluminium		
	*(remote power supply)	**8** Gold leaf		
		9 Bond Copper		

Code example:
CISO P50 CEILING LIGHT + H470mm + White + Light Beam 18° + 4000K = Code: P50.D118BN

CISO P80 CEILING LIGHT

P80.




Ø80mm decorated aluminium cylinder ceiling light with power COB LEDs, suitable as primary lighting for residential, commercial, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Power supply included and integrated


Dimming Accessories page 249



MADE IN ITALY





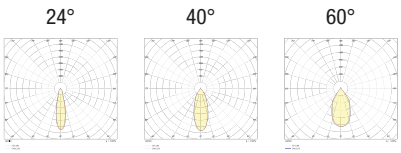

BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR
P80.	**B** H 180mm*	**1** White	**24** 24°	**BN** 4000K
	C H 290mm	**2** Matt black	**40** 40°	**BC** 3000K
	D H 470mm	**5** Gloss aluminium	**60** 60°	**CC** 2700K
	E H 760mm	**7** Brushed aluminium		
	*(remote power supply)	**8** Gold leaf		
		9 Bond Copper		

Code example:
CISO P80 CEILING LIGHT + H470mm + White + Light Beam 40° + 4000K = Code: P80.D140BN

CISO S31 PENDANT LIGHT

S31.




Ø32mm decorated aluminium cylinder suspended light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.


Power LED CRI>90
Power: 2W@500mA
Lumen: 216Lm@500mA
500mA constant current power supply
Power supply included and integrated


Installation accessories page 119
Dimming Accessories page 249



MADE IN ITALY





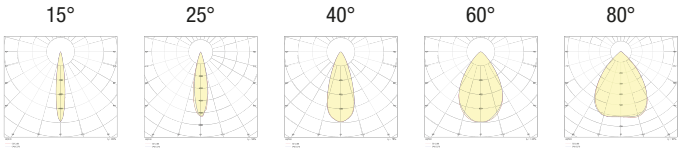


BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR	CABLE
S31.	**A** H 90mm	**1** White	**15** 15°	**BN** 4000K	**T** Transparent
	B H 180mm	**2** Matt black	**25** 25°	**BC** 3000K	**B** White
	C H 290mm	**5** Gloss aluminium	**40** 40°	**CC** 2700K	**N** Black
	D H 470mm	**7** Brushed aluminium	**60** 60°	**BL** Blue	**R** Red
	E H 760mm	**8** Gold leaf	**80** 80°	**VE** Green	
		9 Bond Copper		**RO** Red	
				AM "Wine" Amber	
				Approved by C I V C	

Code example:
CISO S31 SUSPENSION LIGHT + H470mm + White + Light Beam 15° + 4000K + Black Fabric Cable = Code: S31.D115BNN

CISO S33 PENDANT LIGHT

S33.

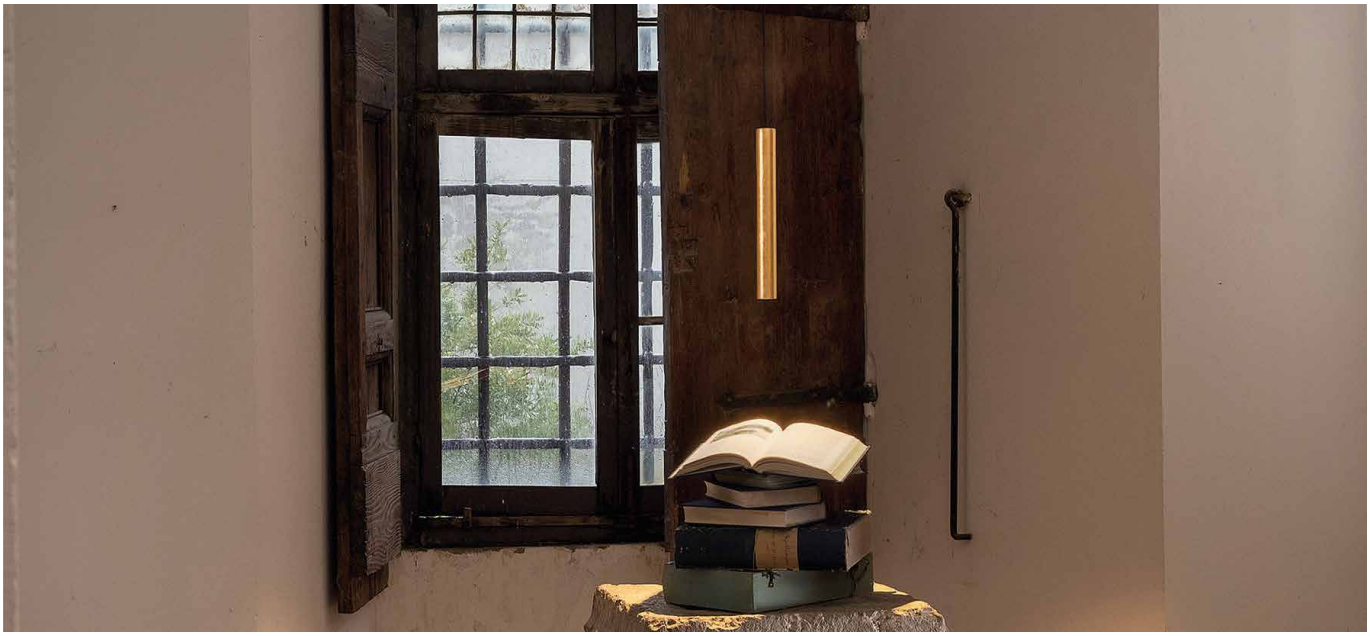


Ø32mm decorated aluminium cylinder suspended light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.


Power LED CRI>90
Power: 6W@500mA
Lumen: 648Lm@500mA
500mA constant current power supply
Power supply included and integrated


Installation accessories page 119
Dimming Accessories page 249



MADE IN ITALY





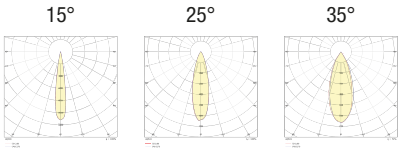

BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR	CABLE
S33.	**A** H 90mm	**1** White	**15** 15°	**BN** 4000K	**T** Transparent
	B H 180mm	**2** Matt black	**25** 25°	**BC** 3000K	**B** White
	C H 290mm	**5** Gloss aluminium	**35** 35°	**CC** 2700K	**N** Black
	D H 470mm	**7** Brushed aluminium		**BL** Blue	**R** Red
	E H 760mm	**8** Gold leaf		**VE** Green	
		9 Bond Copper		**RO** Red	
				AM "Wine" Amber	
				Approved by C I V C	

Code example:
CISO S33 SUSPENSION LIGHT + H470mm + White + Light Beam 35° + 4000K + Black Fabric Cable = Code: S33.D135BNN

CISO S50 PENDANT LIGHT

S50.




Ø50mm decorated aluminium cylinder suspension light, suitable as primary lighting for large residential, commercial, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors.
Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Power supply included and integrated

Installation accessories page 119
Dimming Accessories page 249



MADE IN ITALY







BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR	CABLE
S50.	**B** H 180mm **C** H 290mm **D** H 470mm **E** H 760mm	**1** White **2** Matt black **5** Gloss aluminium **7** Brushed aluminium **8** Gold leaf **9** Bond Copper	**18** 18° **28** 28° **47** 47°	**BN** 4000K **BC** 3000K **CC** 2700K	**T** Transparent **B** White **N** Black **R** Red

Code example:
CISO S50 SUSPENSION LIGHT + H 470mm + White finish + Light Beam 28° + 4000K + Black Fabric Cable = Code: S50.D128BNN

CISO S80 PENDANT LIGHT

S80.




Ø80mm decorated aluminium cylinder suspension light, suitable as primary lighting for large residential, commercial, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors.
Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.


COB LED CRI>90
Power: 7W@200mA
Lumen: 916Lm@200mA
200mA constant current power supply
Power supply included and integrated

Installation accessories page 119
Dimming Accessories page 249



MADE IN ITALY








BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR	CABLE
S80.	**B** H 180mm **C** H 290mm **D** H 470mm **E** H 760mm	**1** White **2** Matt black **5** Gloss aluminium **7** Brushed aluminium **8** Gold leaf **9** Bond Copper	**24** 24° **40** 40° **60** 60°	**BN** 4000K **BC** 3000K **CC** 2700K	**T** Transparent **B** White **N** Black **R** Red

Code example:
CISO S80 SUSPENSION LIGHT + H470mm + White + Light Beam 24° + 4000K + Black Fabric Cable = Code: S80.D124BNN

CEILING ROSES FOR OTHER CISO COMPOSITIONS




BASIC CODES

S31.F1.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

Ø50 mm decorated aluminium ceiling rose for fixing CISO S31, S33, S50 and S80 suspension lights onto plasterboard. Flush-mounted with springs.

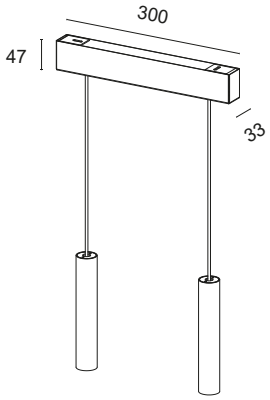


BASIC CODES

RM0300.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

300 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.
Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose.
N.B. Drilling and number of suspended lights to be defined when ordering.

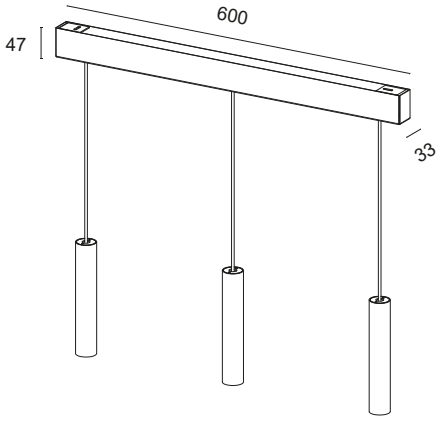


BASIC CODES

RM0600.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

600 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.
Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose.
N.B. Drilling and number of suspended lights to be defined when ordering.

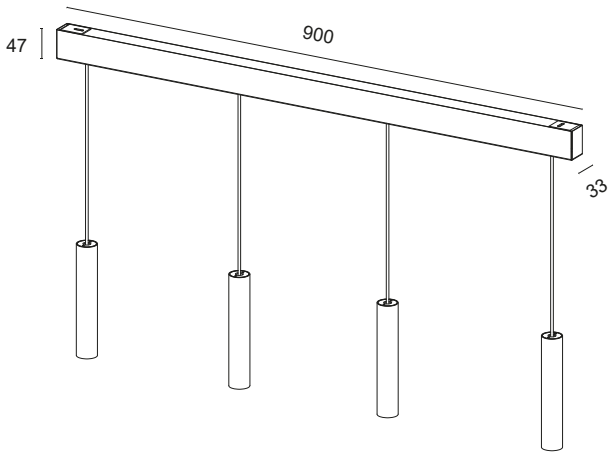

BASIC CODES

RM0900.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

900 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.
Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose.
N.B. Drilling and number of suspended lights to be defined when ordering.

Code example:
300mm Ceiling Rose + White = Code: RM0300.1




LINEAR FLUSH-MOUNTED SYSTEM

EPTA 122
SIGMA 124
REFLEX 126
IOTA 128
RASO 130
RHO 1 132
YPSILON 1 134
DELTA 3 136
TAU 138
MILKY 140

EPTA

E1.

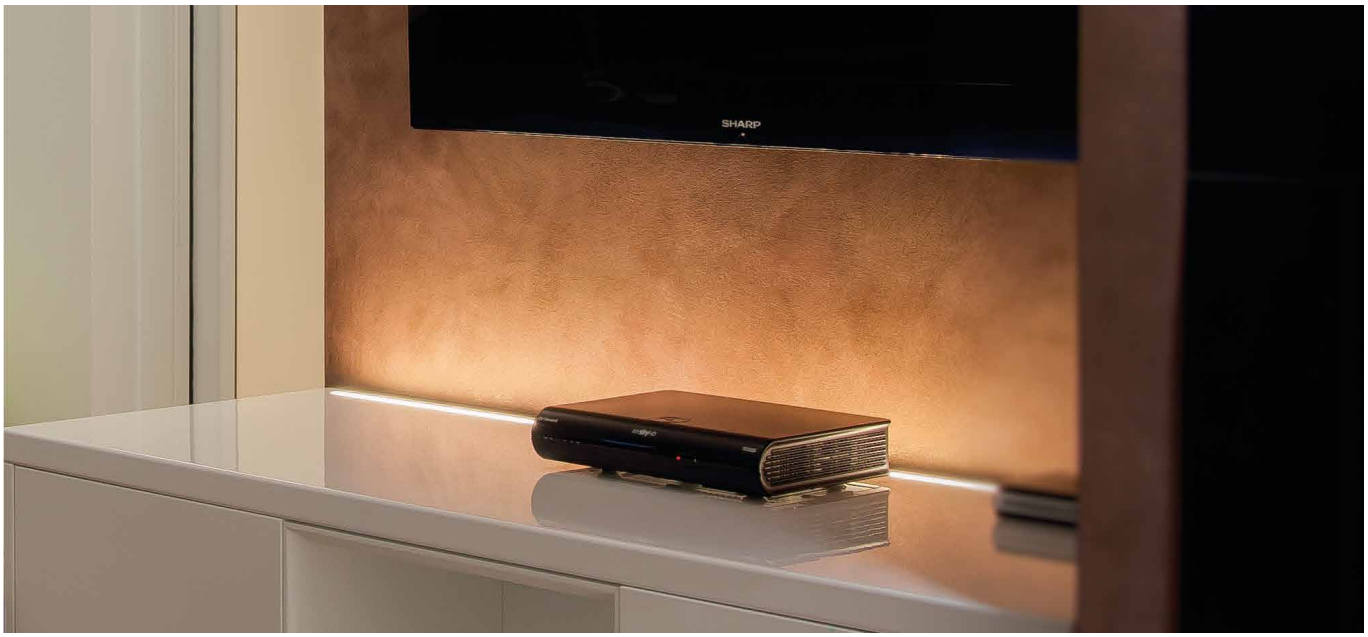


Decorated anodised aluminium lamp complete with brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Flush-mounted

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY



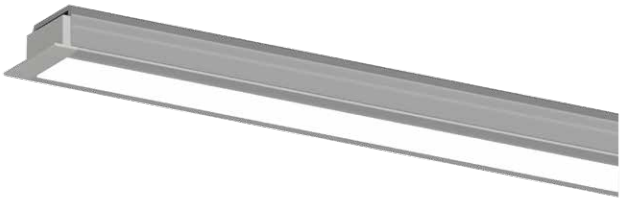

Max. milling cut 18mm



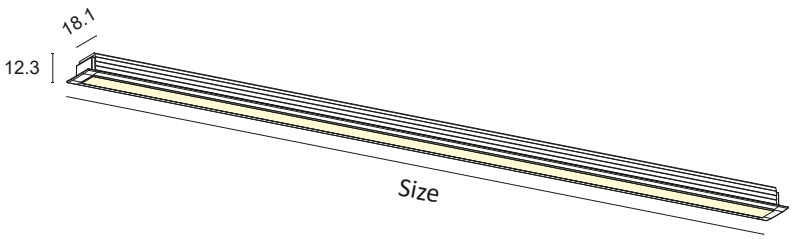

BASIC CODES

E1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- **1S** White
- **2S** Matt black
- **5S** Grey
- **7S** Brushed aluminium

SIDE SUPPORTS + ON/OFF

- **1I** White
- **2I** Matt black
- **5I** Grey
- **7I** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm


LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85
D+	10W/m	1400Lm/m	112LED/m S2835	CRI>90
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90
C2+	15W/m	1550Lm/m	COB LED	CRI>90



*Energy class referring to light source

DIFFUSER

S	BRUSHED
T	TRANSPARENT

Code example:
EPTA + White + Side supports white + 900mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: E1.11GBCDS

SIGMA
S1.



Decorated anodised aluminium lamp complete with brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Flush-mounted

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY





Max. milling cut 25mm



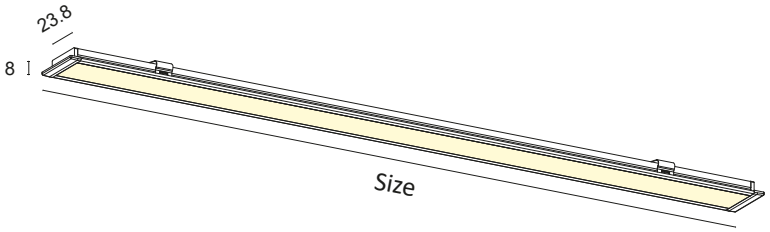

BASIC CODES

S1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	E
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80	D
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90	D
H	30W/m	4500Lm/m	240LED/m S2835	CRI>80	C
C1+	10W/m	1050Lm/m	COB LED	CRI>90	E
C2+	15W/m	1550Lm/m	COB LED	CRI>90	E


*Energy class referring to light source

DIFFUSER

- **S** BRUSHED

Code example:
EPTA + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: S1.11HBCGS

REFLEX
X1.

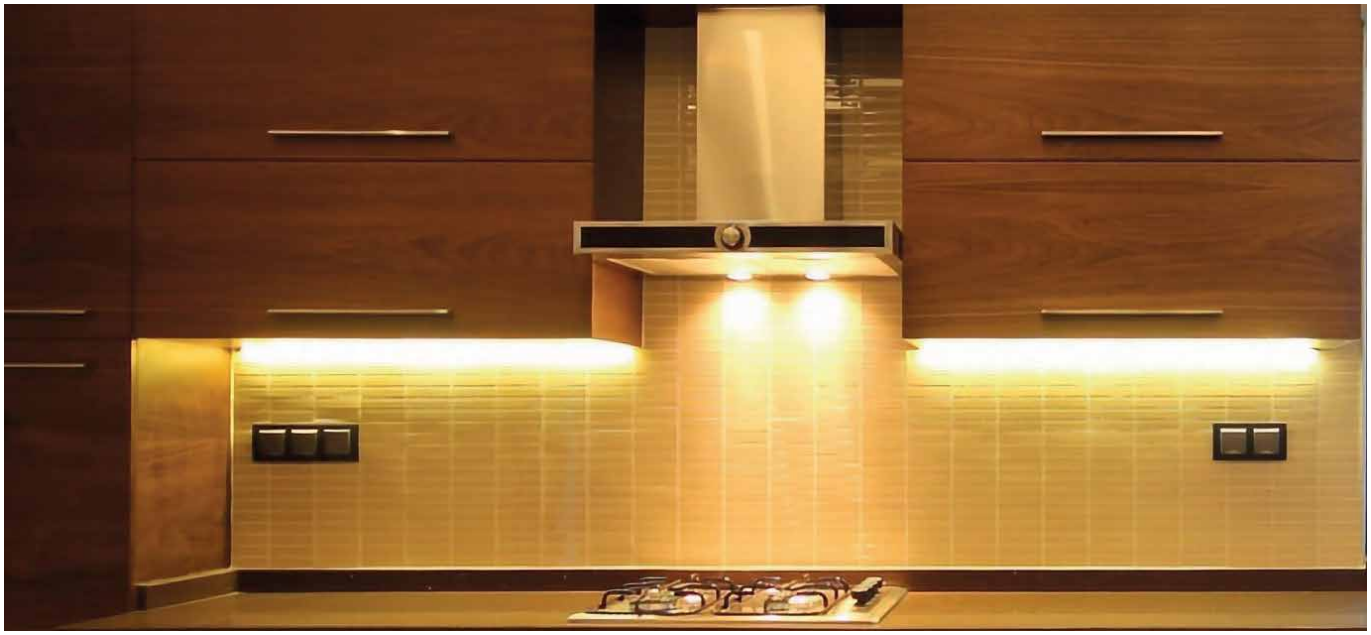

Decorated anodised aluminium lamp complete with brushed diffuser and indirect emission, high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and service lighting, suitable for furnishing, residential, retail and general lighting. Flush-mounted


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



Max. milling cut 23mm



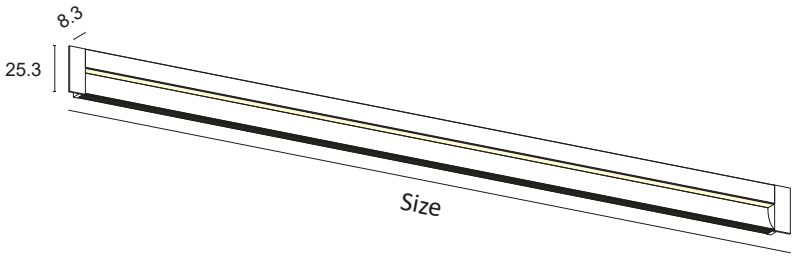

BASIC CODES

X1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

POWER

N+	9.6W/m	800Lm/m 120LED/m S2216 CRI>90	F (A↑G)
O+	12W/m	1000Lm/m 300LED/m S2216 CRI>90	F (A↑G)
P+	14.4W/m	1100Lm/m 180LED/m S2216 CRI>90	G (A↑G)

*Energy class referring to light source

DIFFUSER

S BRUSHED

Code example:
REFLEX + White + Side supports white + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: X1.11HBCO+S

IOTA

I1.




Decorated anodised aluminium lamp complete with flush-fitted brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and primary residential, retail and general lighting. Flush-mounted


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY

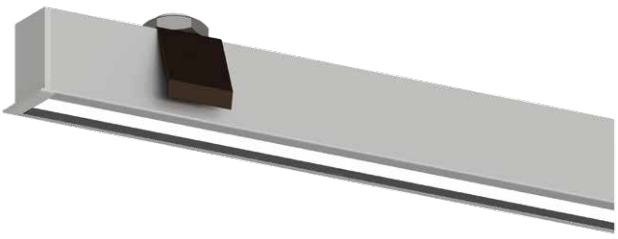

Max. milling cut 15mm



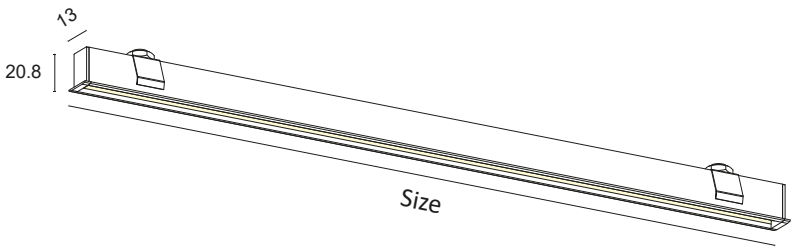

BASIC CODES

I1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm


LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85
D+	10W/m	1400Lm/m	112LED/m S2835	CRI>90
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90
C1+	10W/m	1050Lm/m	COB LED	CRI>90



*Energy class referring to light source

DIFFUSER

S BRUSHED

Code example:
IOTA + White + Side supports white + 900mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: I1.11GBCDS

RASO
RS.



Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted installation onto plasterboard, also supplied with non-returnable cover for plastering.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



Max. milling cut 22mm

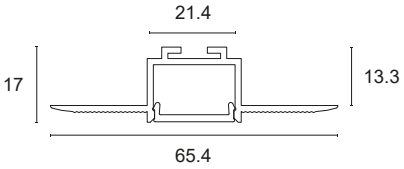

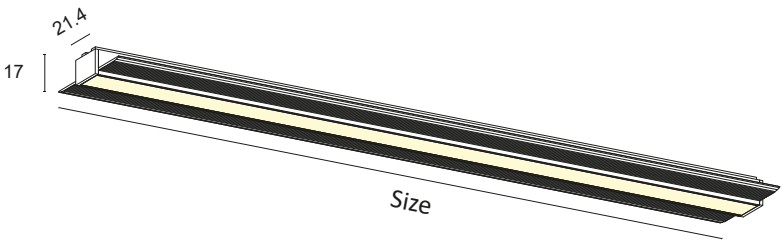

BASIC CODES

RS.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m S2835 CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835 CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m S2835 CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835 CRI>90	E
G	25W/m	3500Lm/m	160LED/m S2835 CRI>80	D
L+	28W/m	3500Lm/m	160LED/m S2835 CRI>90	D
H	30W/m	4500Lm/m	240LED/m S2835 CRI>80	C

*Energy class referring to light source


DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

Code example:
RASO + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: RS.11HBCGS

RHO 1

R1.

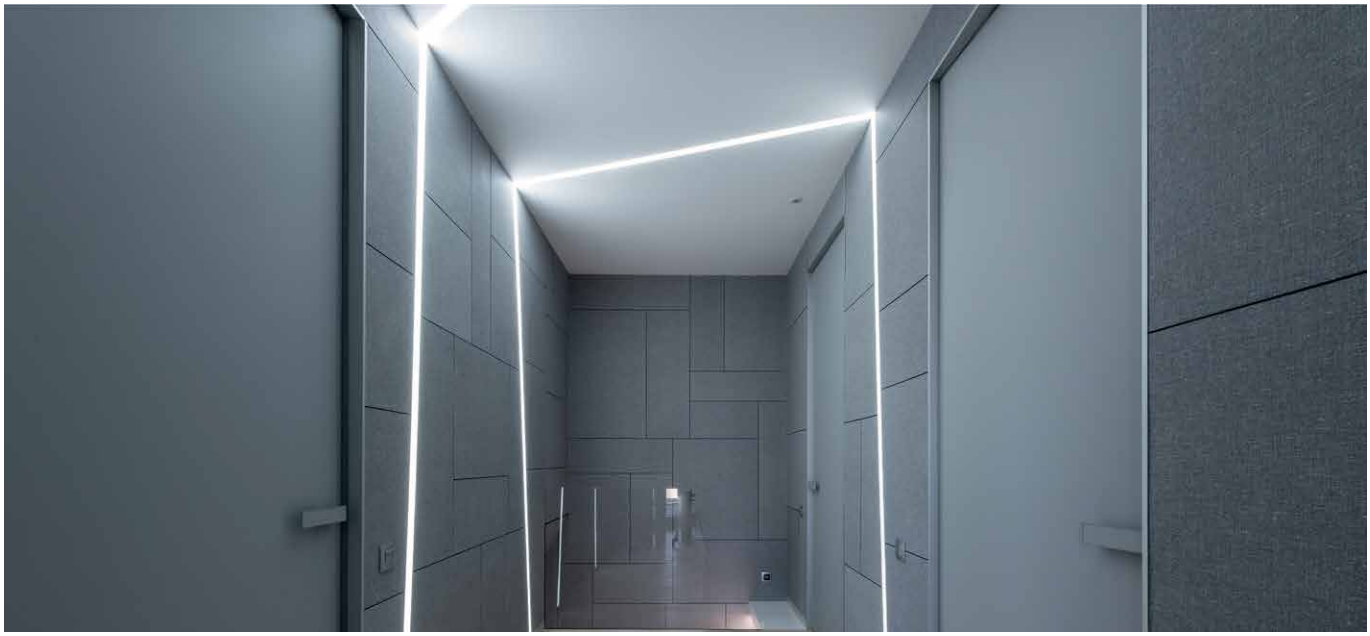


Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted installation onto plasterboard or brick, also supplied with non-returnable cover for plastering.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY



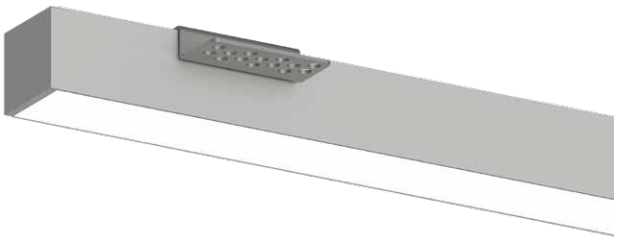

Max. milling cut 23.5mm



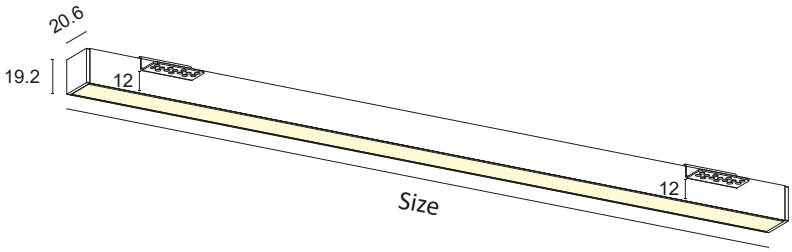

BASIC CODES

R1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm


LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90
H	30W/m	4500Lm/m	240LED/m S2835	CRI>80



*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

Code example:
RHO 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: R1.11HBCGS

YPSILON 1

Y1.




Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. The interlocking profile mechanism allows for easy maintenance. Flush-mounted installation onto plasterboard or brick, also supplied with non-returnable cover for plastering.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY



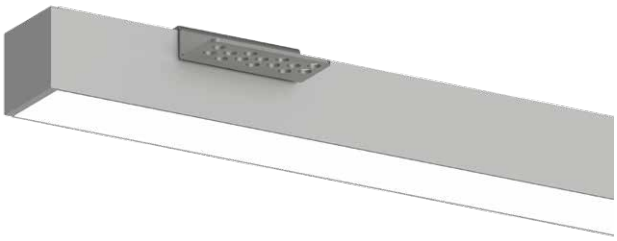

Max. milling cut 23.5mm

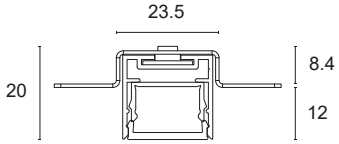

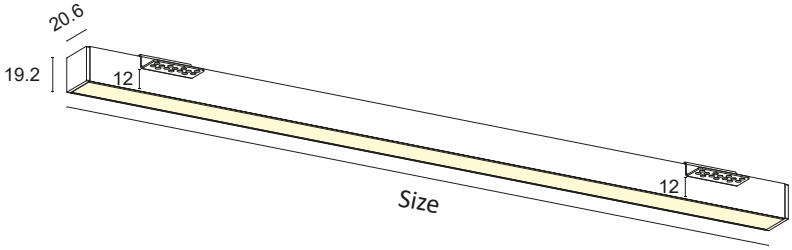

BASIC CODES

Y1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

Code example:
YPSILON 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: Y1.11HBCGS

DELTA 3


D3.



Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary lighting for residential, retail, large-space and general lighting. Flush-mounted


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

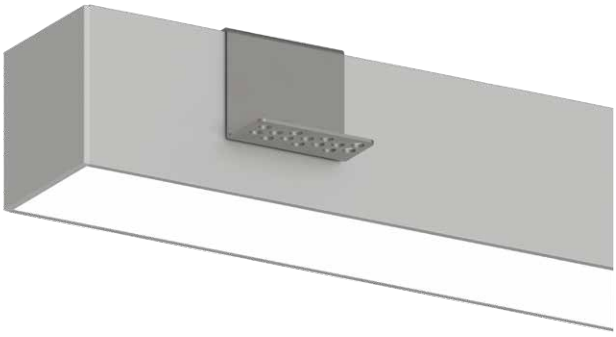

MADE IN ITALY

Max. milling cut 39.8mm

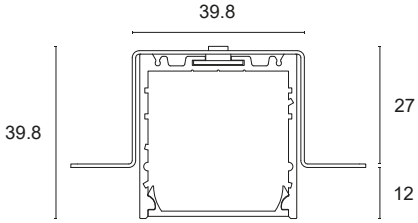

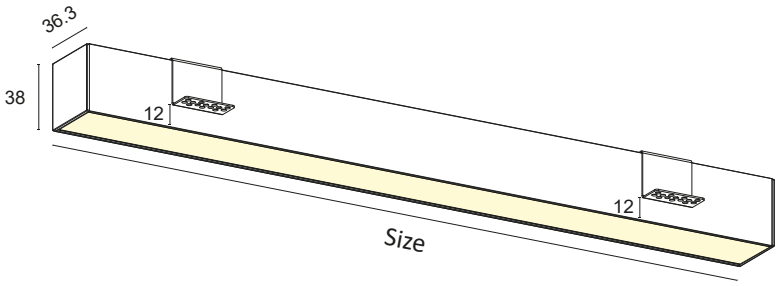

BASIC CODES

D3.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F	20.2W/m	2500Lm/m 168LED/m S2835 CRI>85	E
F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E
G	25W/m	3500Lm/m 160LED/m S2835 CRI>80	D
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D
H	30W/m	4500Lm/m 240LED/m S2835 CRI>80	C
M+	40W/m	5000Lm/m 480LED/m S2835 CRI>90	D

*Energy class referring to light source


DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

Code example:
DELTA 3 + White + Side supports white + 900mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: D3.11GBCFS


COMPLEMENTARY SYSTEMS

EXAMPLE OF DELTA FLUSH MOUNTED AND REM PROJECTOR

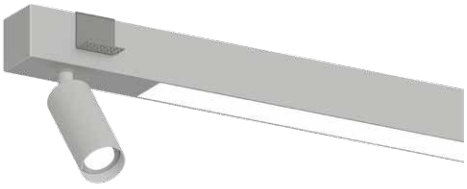


*Details on p. 276

EXAMPLE OF DELTA FLUSH MOUNTED AND DARK MODULE

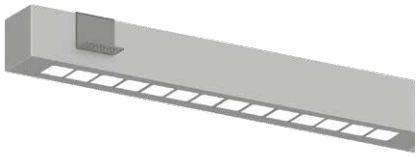

*Details on p. 276

EXAMPLE OF DELTA FLUSH MOUNTED, REM AND DARK MODULE

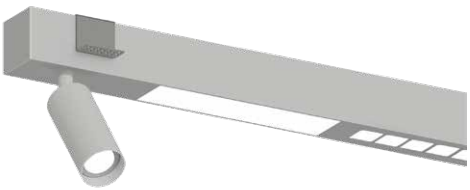

*Details on p. 276

TAU
T1.




Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Flush-mounted


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY

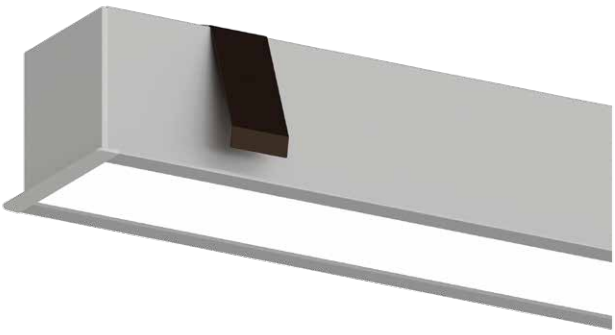

Max. milling cut 38.3mm

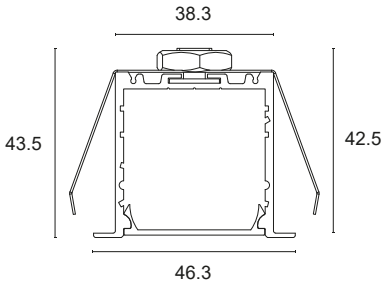

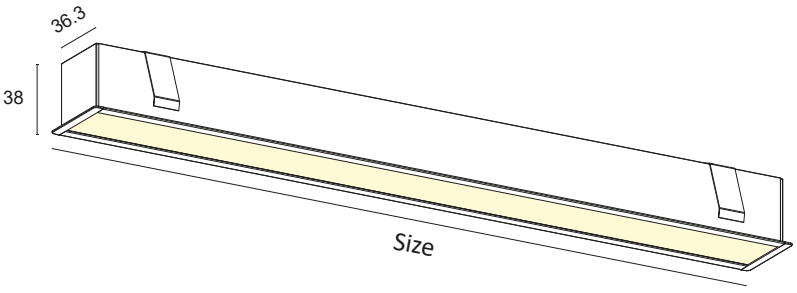

BASIC CODES

T1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F	20.2W/m	2500Lm/m	168LED/m S2835 CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835 CRI>90	E
G	25W/m	3500Lm/m	160LED/m S2835 CRI>80	D
L+	28W/m	3500Lm/m	160LED/m S2835 CRI>90	D
H	30W/m	4500Lm/m	240LED/m S2835 CRI>80	C
M+	40W/m	5000Lm/m	480LED/m S2835 CRI>90	D

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

Code example:
TAU + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: T1.11HBCGS

MILKY
MK.




Polycarbonate lamp complete with aluminium heat sink and high-brightness LED source with a high Lumen/Watt ratio.
Suitable for accent lighting of furnishing, retail and general lighting.
Flush-mounted

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY



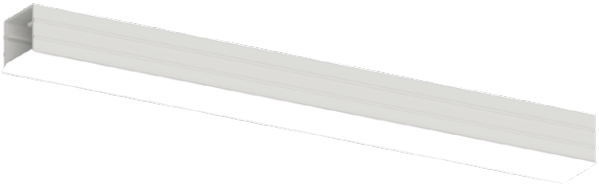

Max. milling cut 8mm



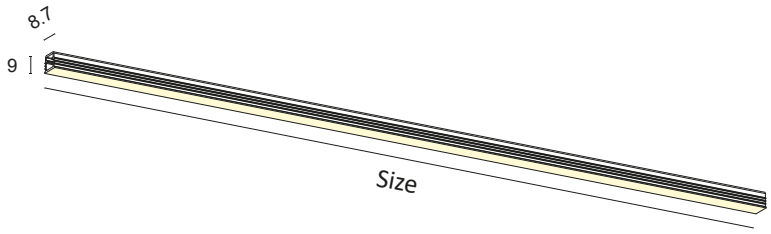

BASIC CODES	SIZE	LED COLOUR	POWER
MK.	**A** 300mm **B** 450mm **C** 500mm **D** 600mm **E** 700mm **F** 800mm **G** 900mm **H** 1000mm **I** 1200mm **J** 1300mm **K** 1400mm **L** 1500mm **M** 1800mm **N** 2000mm **O** 2300mm **P** 2500mm **Q** 2800mm **R** 3000mm	☐ **BN** 4000K ☐ **BC** 3000K ☐ **CC** 2700K	**O+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90 F A↑G *Energy class referring to light source

Code example:
MILKY + 1000mm + 3000K + 12W/m CRI>90 = **Codice: MK.HBCO+**



SOCIETE GENERALE

CEILING-MOUNTED OR FLUSH-MOUNTED LINEAR SYSTEMS

MINI 144
JEY 1 146
JEY 2 148
ZETA 1 150
ZETA 2 152
RHO 3 154
VELA 1 156
VELA 2 158
GAMMA 160
VEGA 162
BETA 164
DELTA 1 166
KAPPA 3 168
QU 170
H1 172
H2 174
H3 176
C1 178
C2 180

MINI

M1.

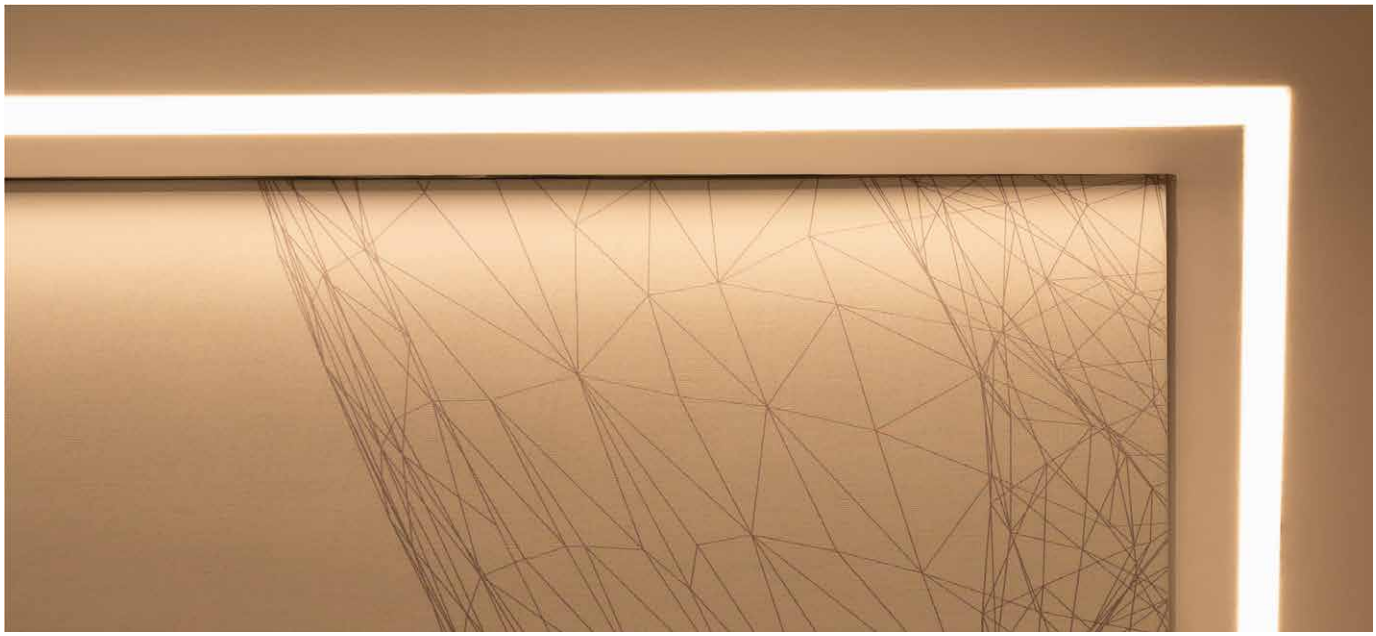


Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting. Mounting with screw clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY







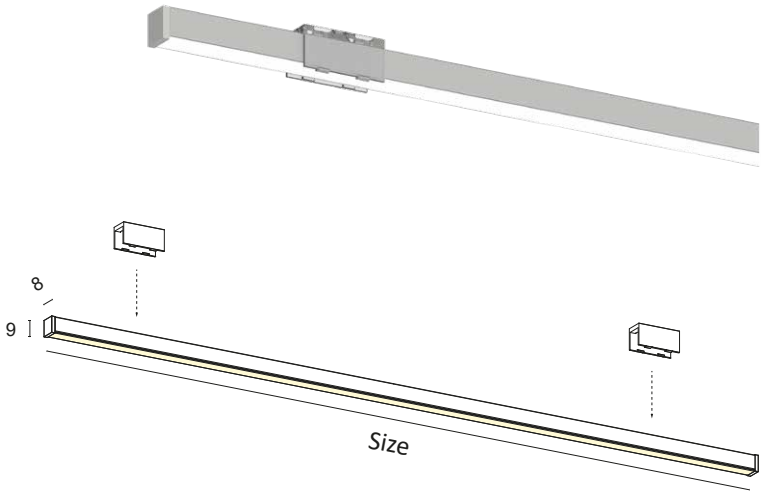

BASIC CODES

M1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

POWER

N+	9.6W/m	800Lm/m 120LED/m S2216 CRI>90	F (A↑G)
O+	12W/m	1000Lm/m 300LED/m S2216 CRI>90	F (A↑G)
P+	14.4W/m	1100Lm/m 180LED/m S2216 CRI>90	G (A↑G)

*Energy class referring to light source

DIFFUSER

S BRUSHED

Code example:
MINI + White + Side supports white + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: M1.11HBCO+S

JEY 1

J1.




Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting. Mounting with screw clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY





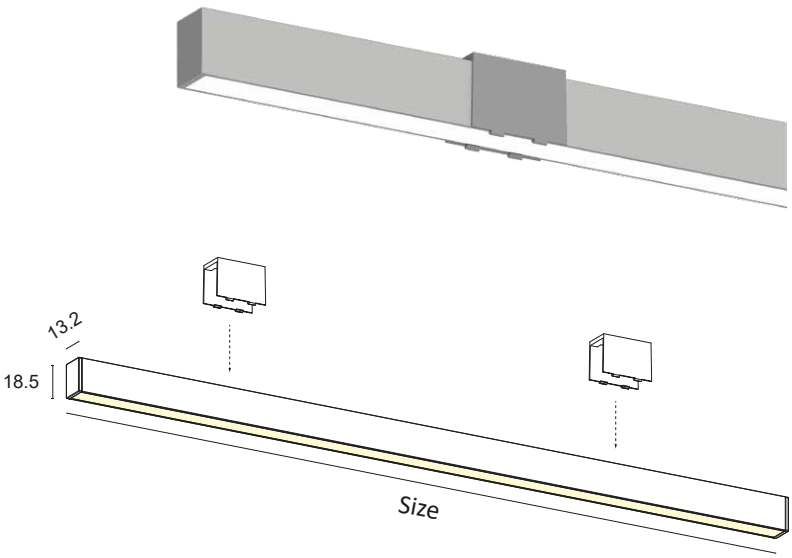

BASIC CODES

J1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm


LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85
D+	10W/m	1400Lm/m	112LED/m	S2835	CRI>90
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90
C1+	10W/m	1050Lm/m	COB LED		CRI>90



*Energy class referring to light source

DIFFUSER

- **S** BRUSHED

Code example:
JEY 1 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: J1.11HBCDS

JEY 2

J2.





Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with recessed screws.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY

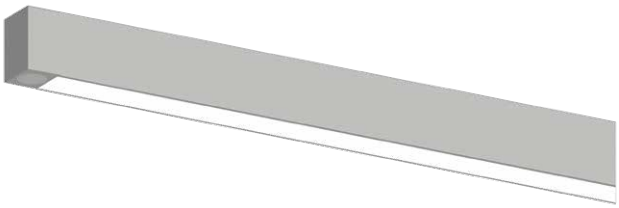



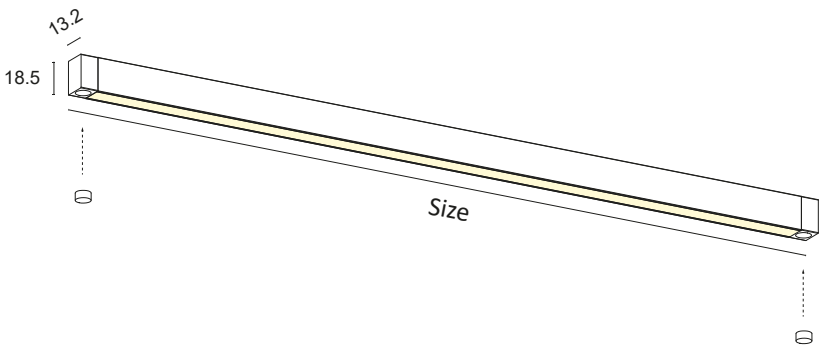

BASIC CODES

J2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85	D
D+	10W/m	1400Lm/m	112LED/m S2835	CRI>90	C
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	E
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80	D
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90	D
C1+	10W/m	1050Lm/m	COB LED	CRI>90	E

*Energy class referring to light source

DIFFUSER

S BRUSHED

Code example:
JEY 2 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: J2.11HBCDS

ZETA 1
Z1.




Decorated anodised aluminium lamp complete with press-fit brushed or transparent diffuser, side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Mounting with recessed screws.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



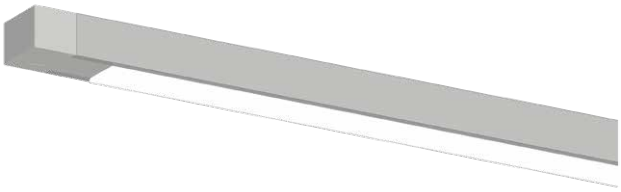



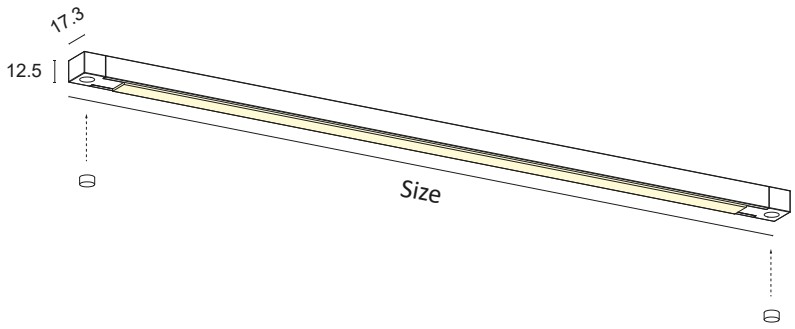

BASIC CODES

Z1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- **1S** White
- **2S** Matt black
- **5S** Grey
- **7S** Brushed aluminium

SIDE SUPPORTS + ON/OFF

- **1I** White
- **2I** Matt black
- **5I** Grey
- **7I** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85	D
D+	10W/m	1600Lm/m	112LED/m S2835	CRI>90	C
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	E
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80	D
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90	D
C2+	15W/m	1550Lm/m	COB LED	CRI>90	E

*Energy class referring to light source

DIFFUSER

- **S** BRUSHED
- **T** TRANSPARENT

Code example:
ZETA 1 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: Z1.11HBCDS

ZETA 2

Z2.




Decorated anodised aluminium lamp complete with press-fit brushed or transparent diffuser, side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Mounting with screw clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY





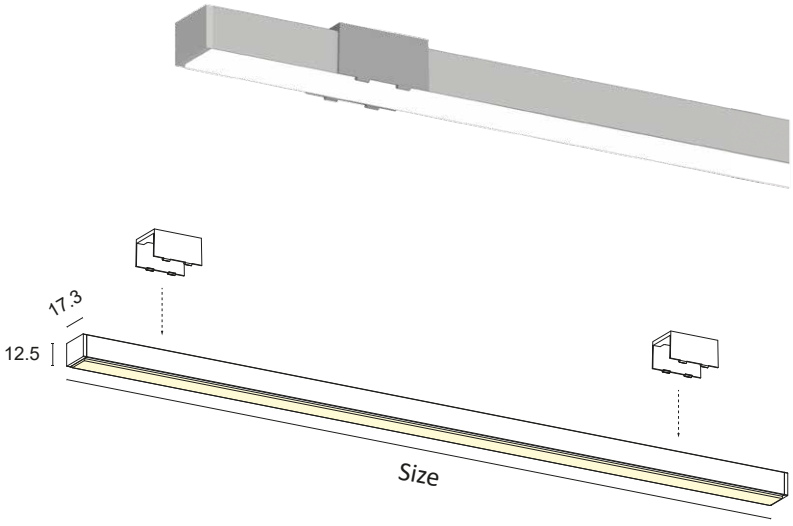

BASIC CODES

Z2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- **1S** White
- **2S** Matt black
- **5S** Grey
- **7S** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	D
D+	10W/m	1600Lm/m	112LED/m	S2835	CRI>90	C
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	E
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	D
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	D
C2+	15W/m	1550Lm/m	COB LED		CRI>90	E

*Energy class referring to light source


DIFFUSER

- **S** BRUSHED
- **T** TRANSPARENT

Code example:
ZETA 2 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: Z2.11HBCDS

RHO 3


R3.

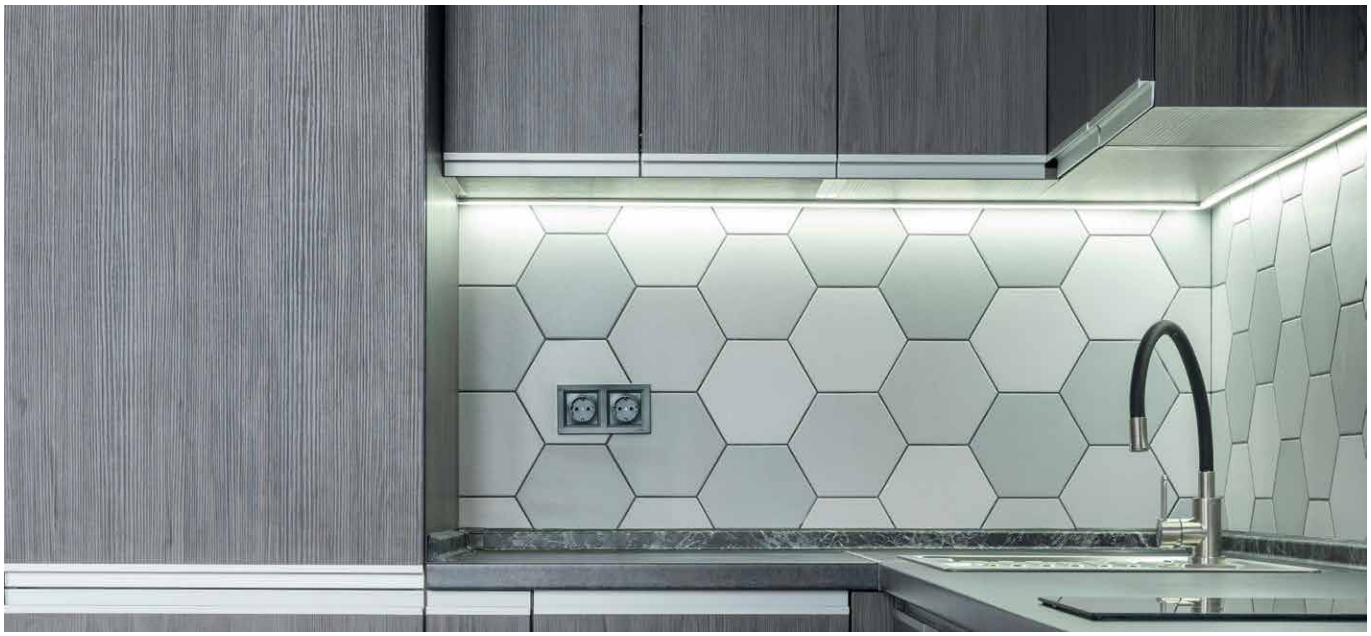

Decorated anodised aluminium lamp complete with press-fit brushed or microprismatic diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with screw clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

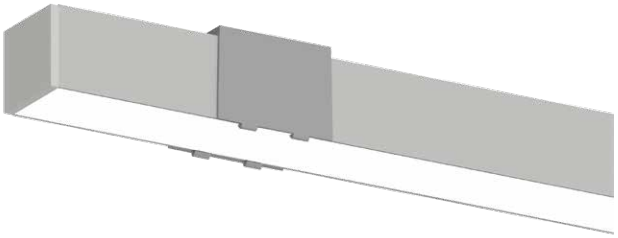


MADE IN ITALY







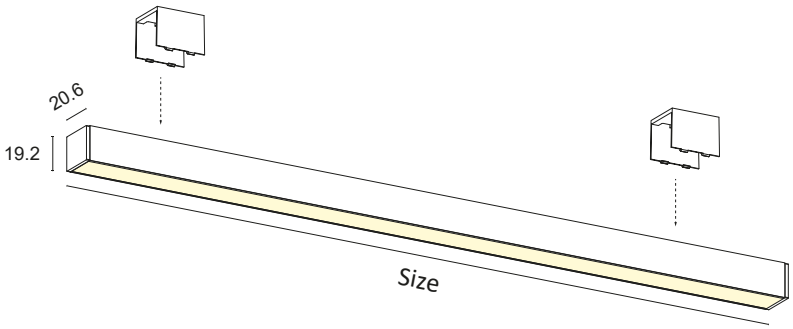

BASIC CODES

R3.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90
H	30W/m	4500Lm/m	240LED/m S2835	CRI>80

*Energy class referring to light source


DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

Code example:
RHO 3 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: R3.11HBCGS

VELA 1

V1.

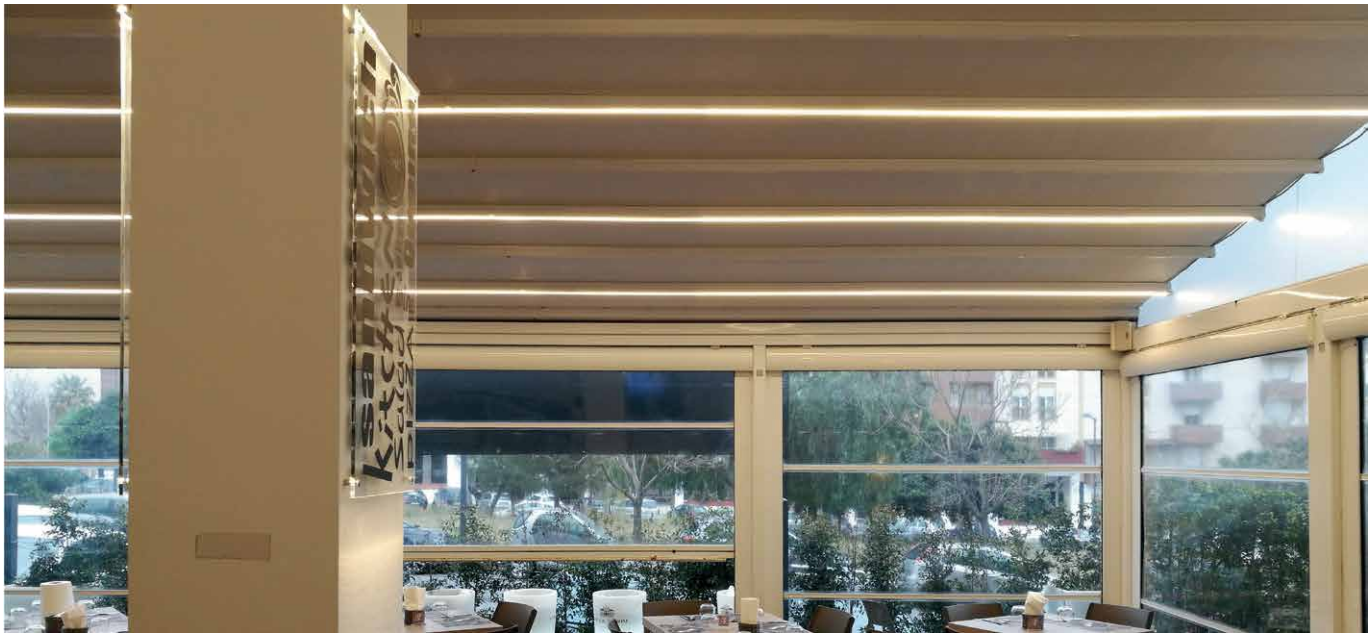


Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for primary residential and general lighting. Mounting with recessed screws.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



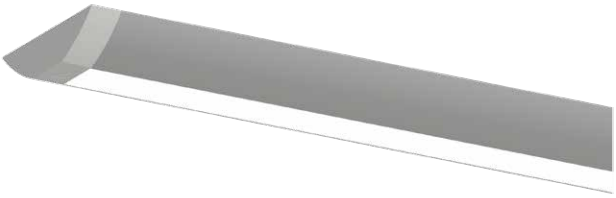



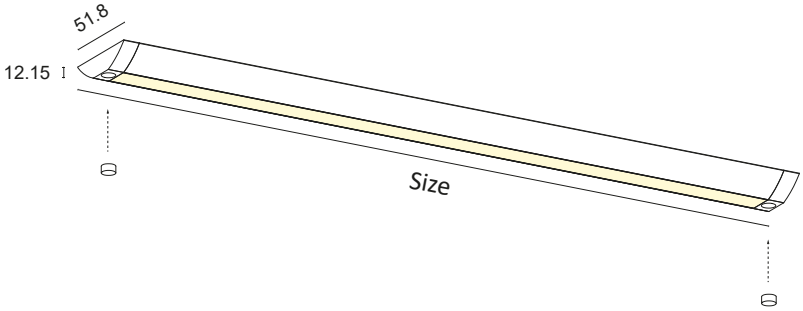

BASIC CODES

V1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- **1S** White
- **2S** Matt black
- **5S** Grey
- **7S** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm


LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80



*Energy class referring to light source


DIFFUSER

S BRUSHED

Code example:
VELA 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: V1.11HBCGS

VELA 2

V2.

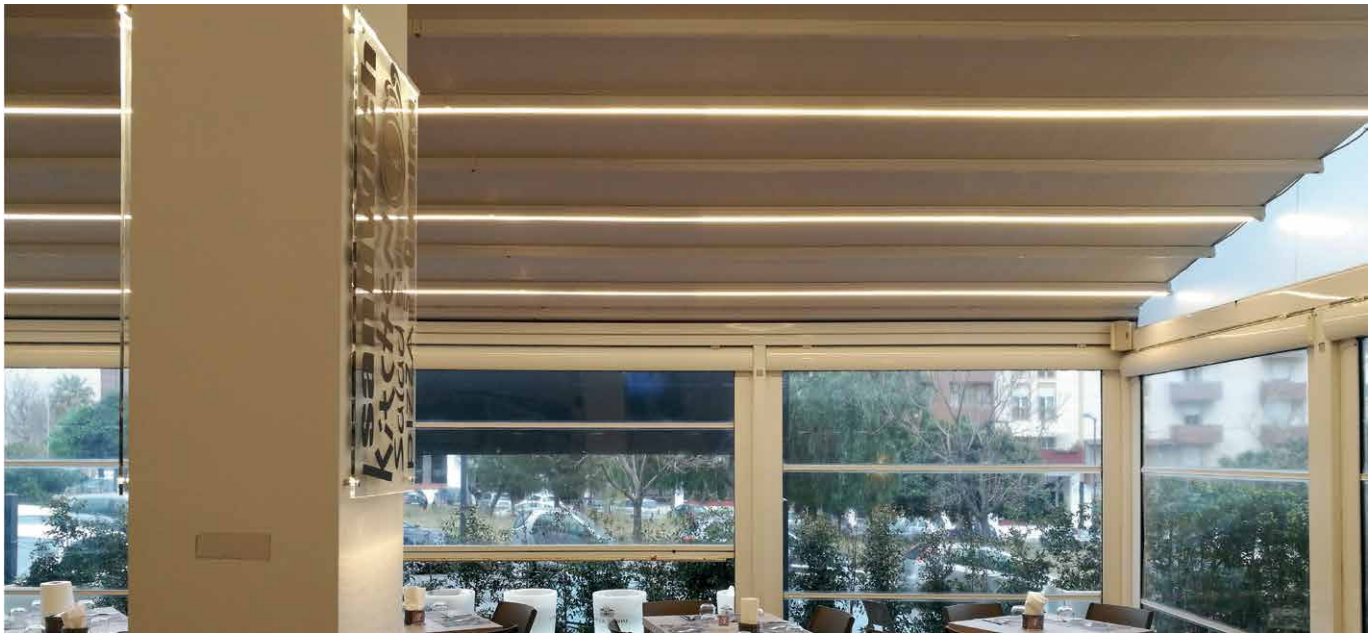

Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for primary residential and general lighting. Mounting with recessed clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY







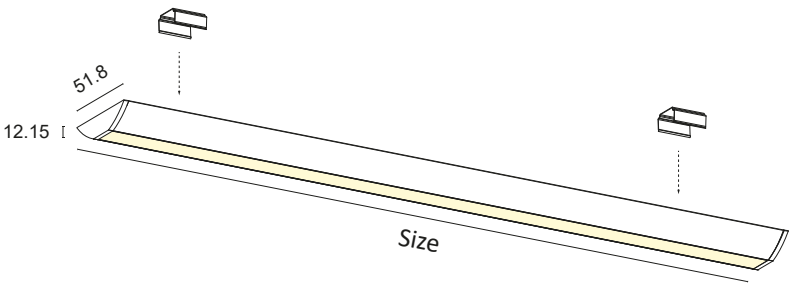

BASIC CODES

V2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- **1S** White
- **2S** Matt black
- **7S** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80

*Energy class referring to light source

DIFFUSER

- **S** BRUSHED

Code example:
VELA 2 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: V2.11HBCGS

GAMMA
G1.




Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. Wide availability of accessories that can be integrated into the profile. Suitable for under-wall cupboard, furnishing lighting, panel and general lighting. Mounting with screw clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY



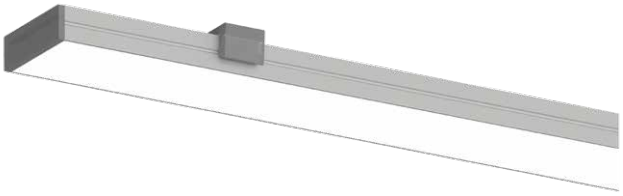





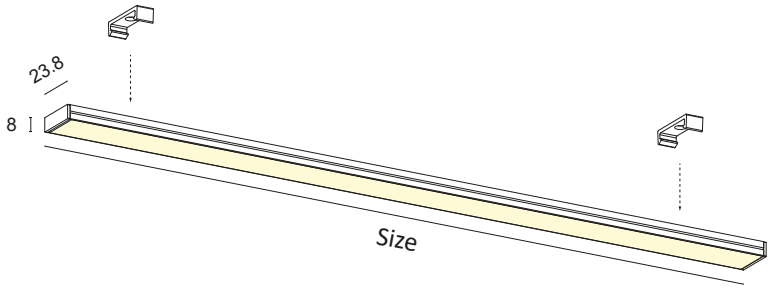

BASIC CODES

G1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- **1S** White
- **2S** Matt black
- **5S** Grey
- **7S** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

DIFFUSER

S BRUSHED

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80
C1+	10W/m	1050Lm/m	COB LED		CRI>90
C2+	15W/m	1550Lm/m	COB LED		CRI>90

*Energy class referring to light source

Code example:
GAMMA + White + Side supports white + 1000mm + 3000K + 16.8W/m CRI>85 + Brushed diffuser = Code: G1.11HBCES

VEGA
VG1.




Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. 45° light emission, possibility of integrating an on/off Touch system into the edge.
Suitable for under-wall cupboard, furnishing lighting, panel and general lighting. Mounting with screw clips or magnets.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY




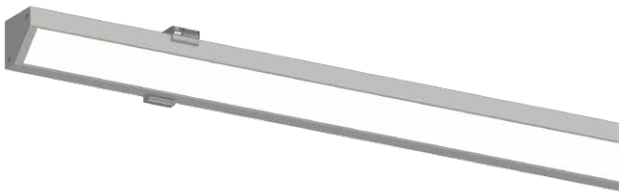




With clip

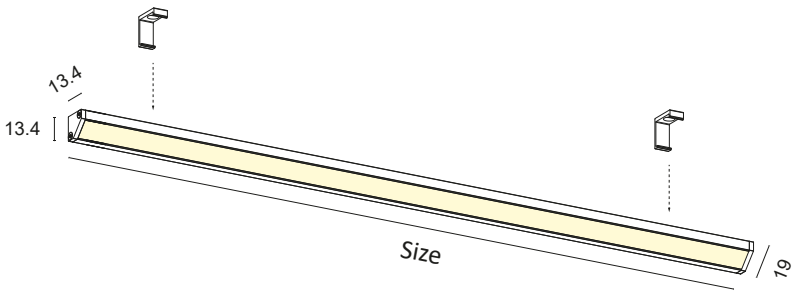



With magnet

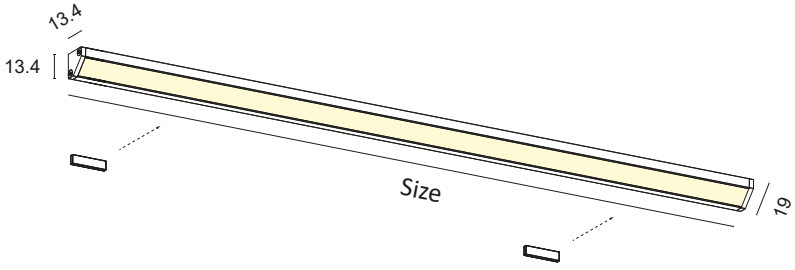

BASIC CODES

VG1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **7T** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85
D+	10W/m	1600Lm/m	112LED/m	S2835	CRI>90
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90
P+	14.4W/m	1100Lm/m	180LED/m	S2216	CRI>90
C2+	15W/m	1550Lm/m	COB LED		CRI>90

D (A↑G)
C (A↑G)
D (A↑G)
D (A↑G)
E (A↑G)
E (A↑G)
G (A↑G)
E (A↑G)

*Energy class referring to light source

DIFFUSER


- **S** BRUSHED

Code example:
VEGA + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: VG1.11HBCDS

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

SVG2.8




Transparent polycarbonate clip with 12xM2.5 screws for surface mounting on a variety of surfaces. adhered to the surface. 12xM2.5 screws included.

NB. We recommend No. 1 Clip per 500mm

BASIC CODES

NDL40XP5X2



Magnets to glue on for fixing on smooth metal surfaces.

NB. We recommend No. 1 magnet every 150mm (Max. attraction force 1.60kg).

BETA

B1.




Decorated anodised aluminium lamp complete with press-fit brushed diffuser , side supports and LED source with a high Lumen/Watt ratio. 45° light emission, wide availability of accessories that can be integrated into the profile.
Suitable for under-wall cupboard, furnishing lighting, panel and general lighting. Mounting with screw clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY







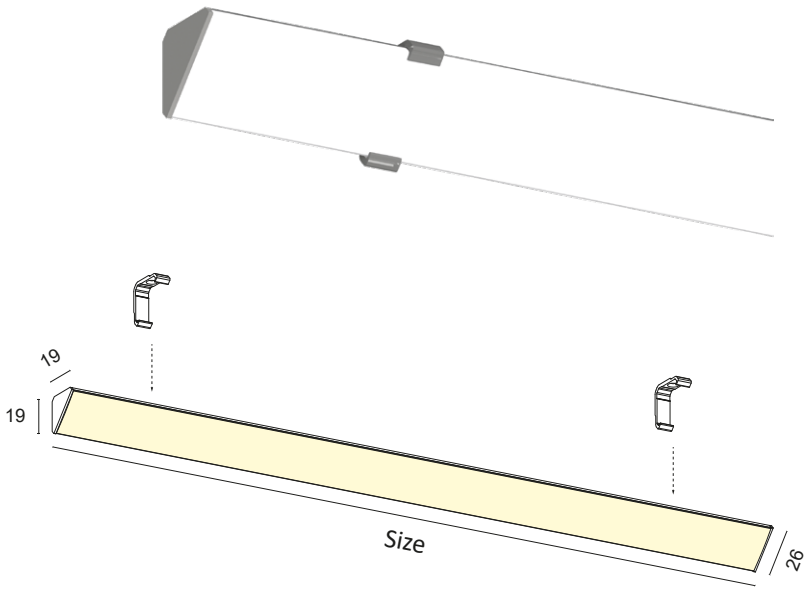

BASIC CODES

B1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **5T** Grey
- **7T** Brushed aluminium

SIDE SUPPORTS + SENSOR

- **1S** White
- **2S** Matt black
- **5S** Grey
- **7S** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

D	10W/m	1400Lm/m	98LED/m	S2835	CRI>85	D
D+	10W/m	1600Lm/m	112LED/m	S2835	CRI>90	C
E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90	E
G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80	D
L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90	D
H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80	C

*Energy class referring to light source

DIFFUSER

S	BRUSHED
T	TRANSPARENT

Code example:
BETA + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: B1.11HBCGS

DELTA 1

D1.




Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Mounting on ceiling with concealed clips.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



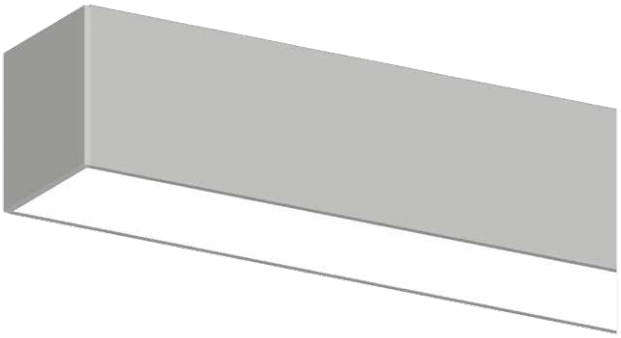



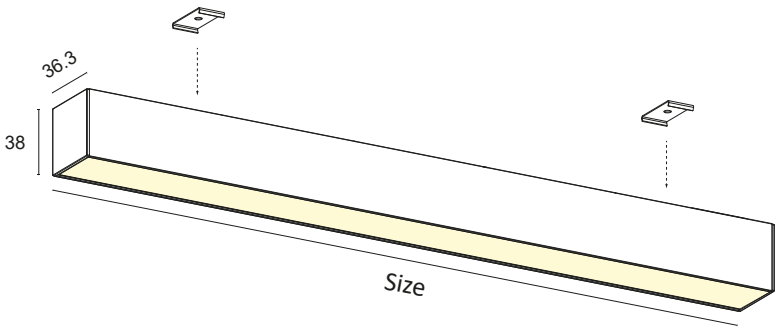

BASIC CODES

D1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F	20.2W/m	2500Lm/m 168LED/m S2835 CRI>85	E
F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E
G	25W/m	3500Lm/m 160LED/m S2835 CRI>80	D
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D
H	30W/m	4500Lm/m 240LED/m S2835 CRI>80	C
M+	40W/m	5000Lm/m 480LED/m S2835 CRI>90	D

*Energy class referring to light source


DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

Code example:
DELTA 1 + White + Side supports white + 900mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: D1.11GBCFS


COMPLEMENTARY SYSTEMS

EXAMPLE OF DELTA CEILING LIGHT AND REM PROJECTOR

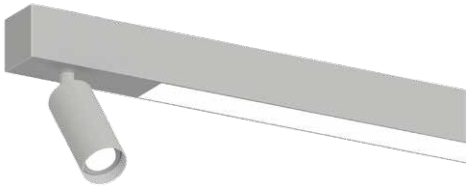


*Details on p. 276

EXAMPLE OF DELTA CEILING LIGHT AND DARK MODULE

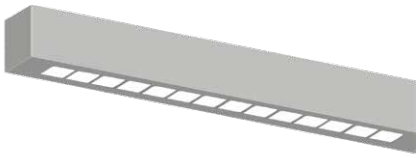

*Details on p. 276

EXAMPLE OF DELTA CEILING LIGHT, REM AND DARK MODULE

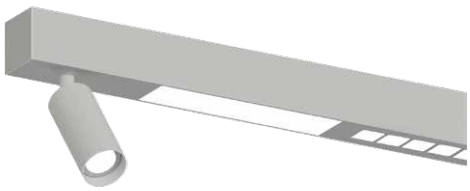

*Details on p. 276

KAPPA 3


K3.



Decorated anodised aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Ceiling mounting with concealed magnets, plus steel safety cables.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

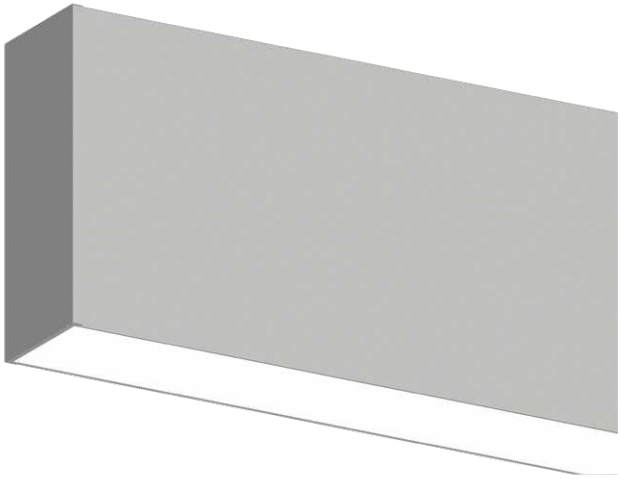

MADE IN ITALY



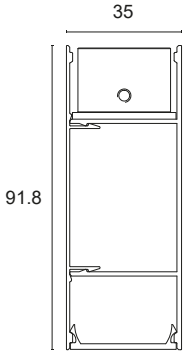

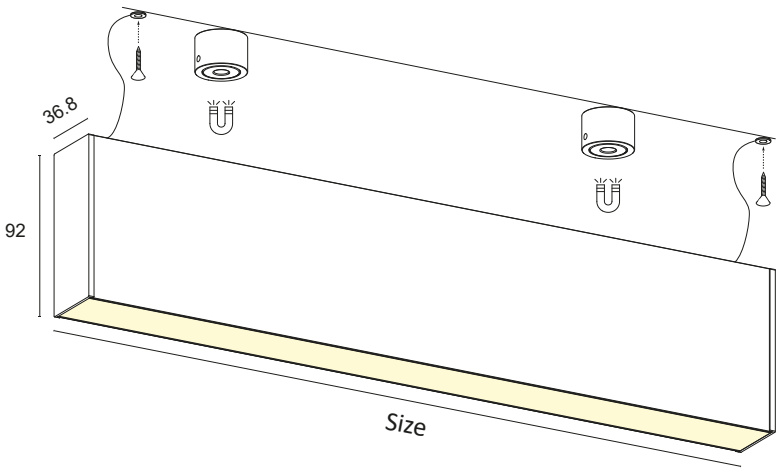

BASIC CODES

K3.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85 E
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90 E
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80 D
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90 D
H	30W/m	4500Lm/m	240LED/m S2835	CRI>80 C
M+	40W/m	5000Lm/m	480LED/m S2835	CRI>90 D

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

POWER SUPPLY


- **N** ON/OFF
- **D** DALI + PUSH

*The lamp can be customised with independent switch-on and dimming on request.

Code example:
KAPPA 3 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser + ON/OFF = Code: K3.11HBCGSN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA CEILING LIGHT AND REM PROJECTOR

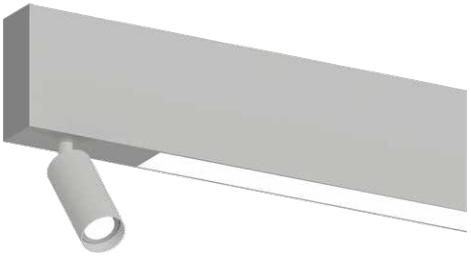


*Details on p. 276

EXAMPLE OF KAPPA CEILING LIGHT AND DARK MODULE

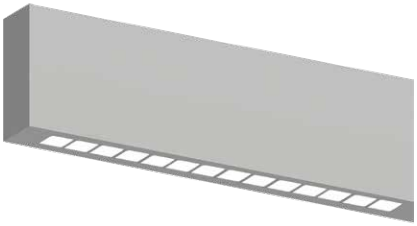


*Details on p. 276

EXAMPLE OF KAPPA CEILING LIGHT, REM AND DARK MODULE

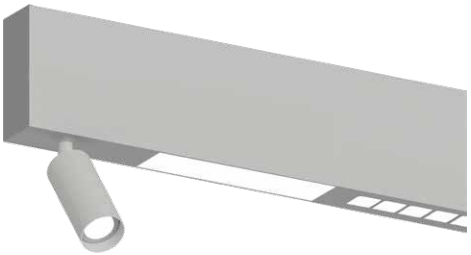

*Details on p. 276

QU
Q1.

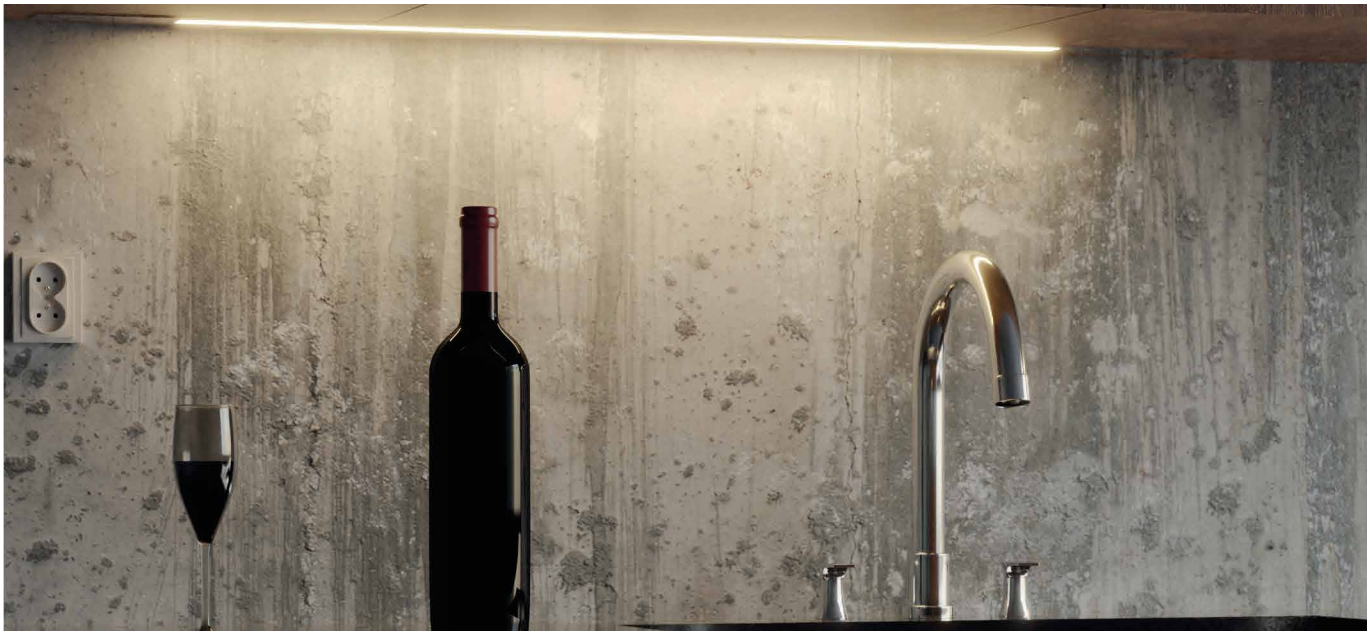


Polycarbonate lamp complete with aluminium heat sink and high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent lighting of furnishing, retail and general lighting.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



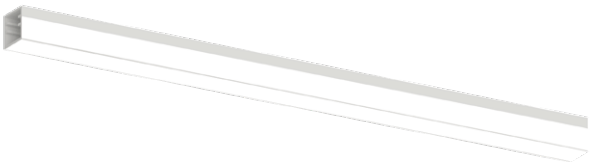



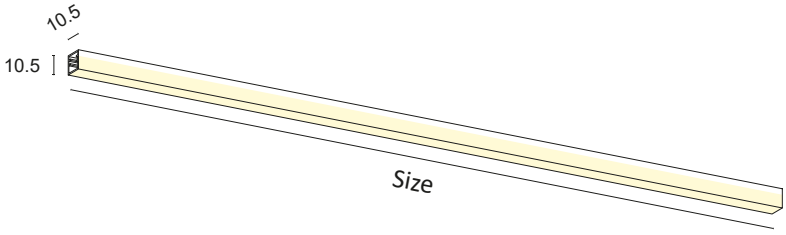

BASIC CODES	SIZE	LED COLOUR	POWER
Q1.	**A** 300mm **B** 450mm **C** 500mm **D** 600mm **E** 700mm **F** 800mm **G** 900mm **H** 1000mm **I** 1200mm **J** 1300mm **K** 1400mm **L** 1500mm **M** 1800mm **N** 2000mm **O** 2300mm **P** 2500mm **Q** 2800mm **R** 3000mm	**BN** 4000K **BC** 3000K **CC** 2700K	**O+** 12W/m 1000Lm/m 300LED/m S2216 CRI>90 F **P+** 14.4W/m 1100Lm/m 180LED/m S2216 CRI>90 G *Energy class referring to light source

Code example:
QU + 1000mm + 3000K + 12W/m CRI>90 = Code: Q1.HBCO+


ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES	WIDTH
NM.	**L10** 10 mm



Magnetic adhesive tape for anodised aluminium profiles.
Supplied on a 10-metre reel, 1.2 mm thickness.
(Force of attraction >40g/cm².)


BASIC CODES	WIDTH
4965.	**08** 8 mm



Double-sided adhesive tape for aluminium profiles and LED strips.
Supplied on a 50-metre reel.

H1

H1.

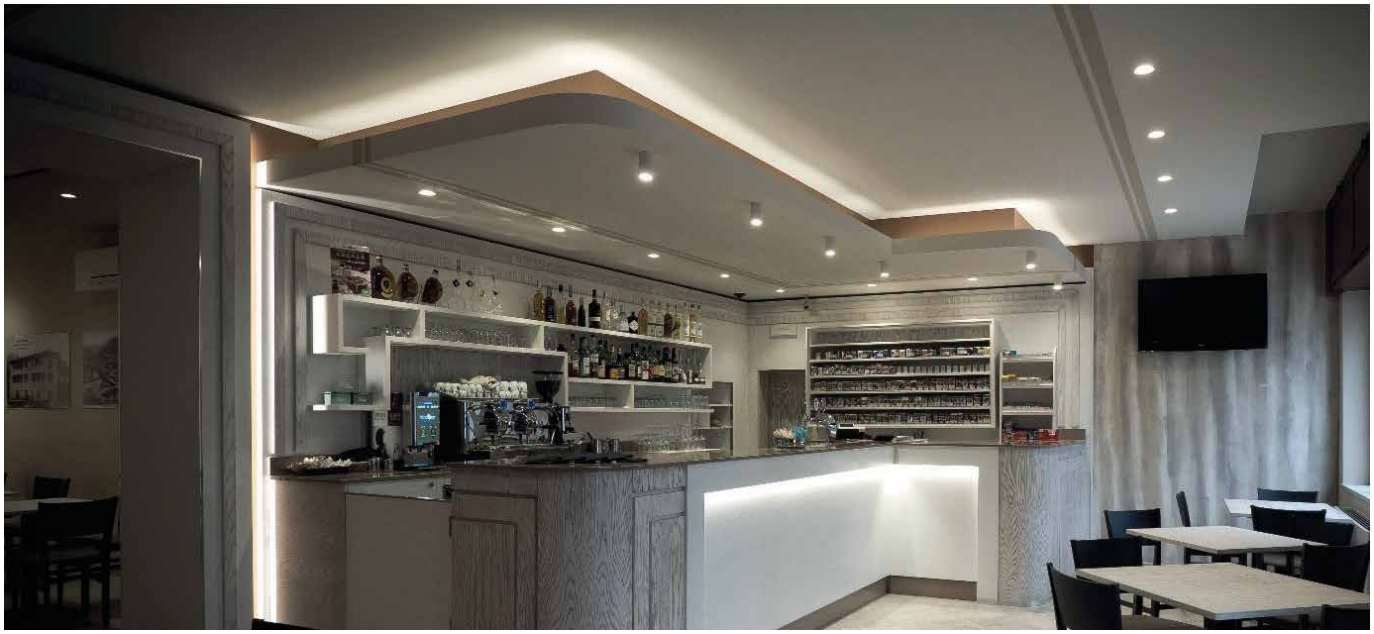


Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with concealed clips or magnets.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY




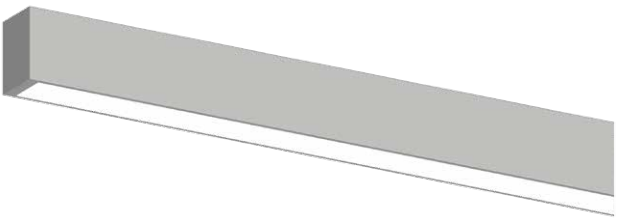



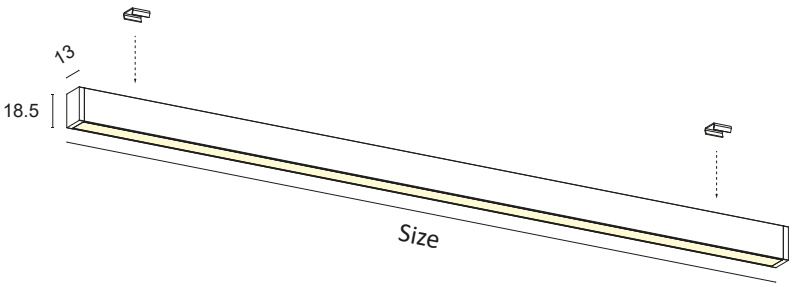



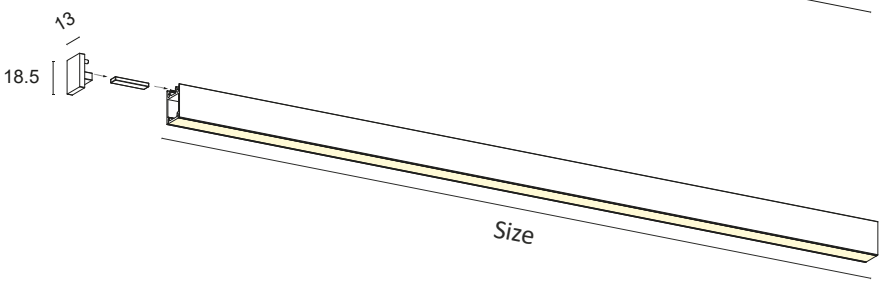

BASIC CODES

H1.

FINISHES

- ☐ **1** White
- ■ **2** Matt black
- ■ **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- ☐ **1** White
- ■ **2** Matt black
- ■ **7** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- ☐ **BN** 4000K
- ☐ **BC** 3000K
- ☐ **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85	D
D+	10W/m	1600Lm/m	112LED/m S2835	CRI>90	C
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	E
O+	12W/m	1000Lm/m	300LED/m S2216	CRI>90	F
P+	14.4W/m	1100Lm/m	180LED/m S2216	CRI>90	G
C2+	15W/m	1550Lm/m	COB LED	CRI>90	E

*Energy class referring to light source

DIFFUSER


S BRUSHED

Code example:
H1 + White + Side supports white + H1 + 1000mm + 3000K + 10W//m CRI>85 + Brushed diffuser = Code: H1.11HBCDS

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

PA.GG02




Steel clip for snapping onto flat surfaces.
The clip hooks onto the rear slots, which will be perfectly adhered to the surface. 12xM2.5 screws included.

NB. We recommend No. 1 Clip per 500mm

BASIC CODES

NDL40XP5X2



Magnets to glue on for fixing on smooth metal surfaces.

NB. We recommend No. 1 magnet every 150mm (Max. attraction force 1.60kg).

H2

H2.





Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with concealed clips or magnets.

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY

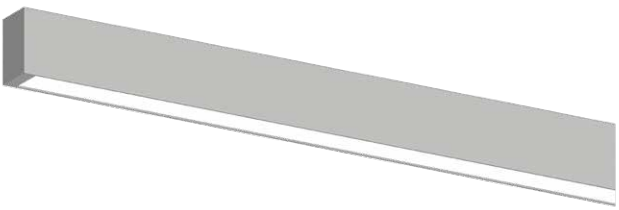




With clip

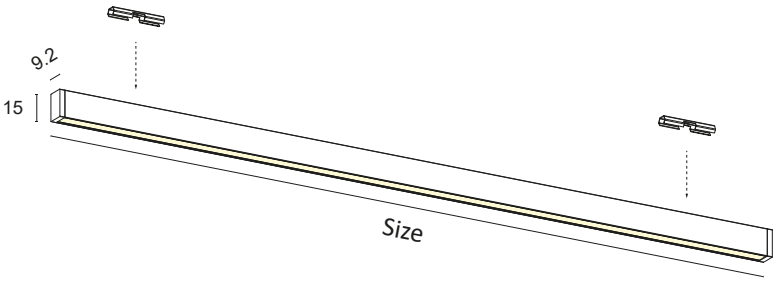



With magnet

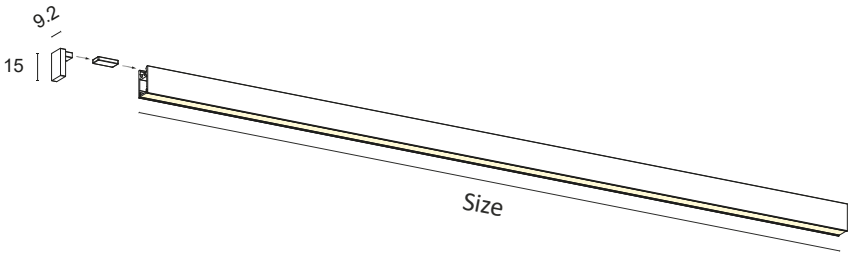

BASIC CODES

H2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

N+	9.6W/m	800Lm/m 120LED/m S2216 CRI>90	F
O+	12W/m	1000Lm/m 300LED/m S2216 CRI>90	F
P+	14.4W/m	1100Lm/m 180LED/m S2216 CRI>90	G

*Energy class referring to light source

DIFFUSER


S BRUSHED

Code example:
H2 + White + Side supports white + H2 + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: H2.11HBCO+S

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

PA.GG10




Steel clip for snapping onto flat surfaces.
The clip hooks onto the rear slots, which will be perfectly adhered to the surface. 12xM2.5 screws included.

NB. We recommend No. 1 Clip per 500mm

BASIC CODES

NDL12XP6X2



Magnets to glue on for fixing on smooth metal surfaces.

NB. We recommend No. 1 magnet every 150mm (Max. attraction force 0.880kg).

H3
H3.




Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with a high Lumen/Watt ratio. Suitable for furnishing lighting and general lighting.
Mounting with magnets, included in the package.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



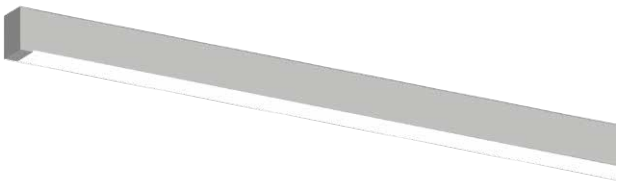



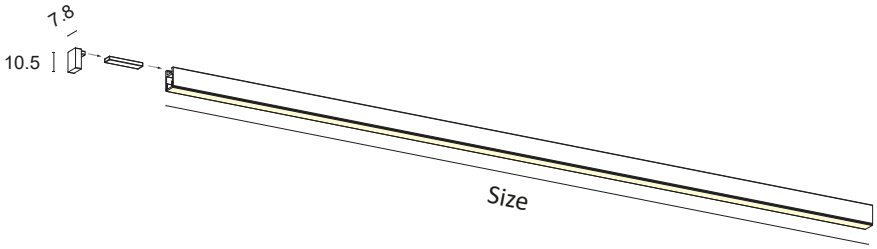

BASIC CODES

H3.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

BN	4000K
BC	3000K
CC	2700K

POWER

N+	9.6W/m	800Lm/m 120LED/m S2216 CRI>90	F
O+	12W/m	1000Lm/m 300LED/m S2216 CRI>90	F
P+	14.4W/m	1100Lm/m 180LED/m S2216 CRI>90	G

*Energy class referring to light source

DIFFUSER

S	BRUSHED

Code example:
H3 + White + Side supports white + H2 + 1000mm + 3000K + 12W/m CRI>90 + Brushed diffuser = Code: H3.11HBCO+S

C1
C1.




Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with high Lumen/Watt ratio. Possibility of integrating an on/off Touch system into the edge.
Suitable for furnishing lighting and general lighting.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



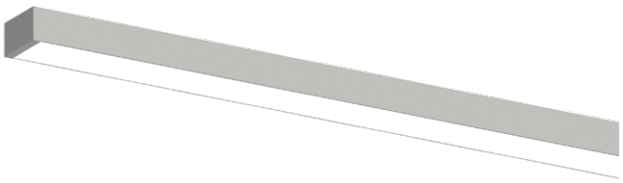



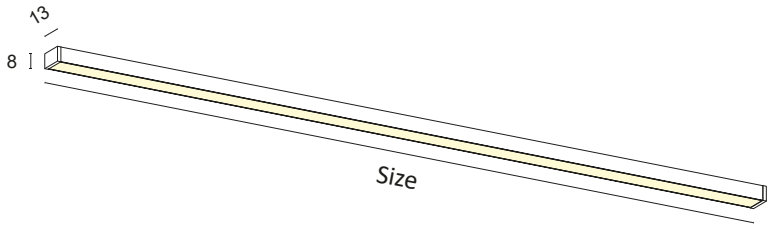

BASIC CODES

C1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **7T** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	D
O+	12W/m	1000Lm/m	300LED/m S2216	CRI>90	F
P+	14.4W/m	1100Lm/m	180LED/m S2216	CRI>90	G
C1+	10W/m	1050Lm/m	COB LED	CRI>90	E

*Energy class referring to light source

DIFFUSER

- **S** BRUSHED

Code example:
C1 + White + Side supports white + 1000mm + 3000K + 16.8W/m CRI>85 + Satin diffuser = Code: C1.11HBCES

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

NM.

WIDTH

- **L10** 10 mm




Magnetic adhesive tape for anodised aluminium profiles.
Supplied on a 10-metre reel, 1.2 mm thickness.
(Force of attraction >40g/cm².)

BASIC CODES

4965.

WIDTH

- **08** 8 mm



Double-sided adhesive tape for aluminium profiles and LED strips.
Supplied on a 50-metre reel.

C2
C2.




Decorated anodised aluminium lamp complete with press-fit brushed diffuser, side supports and LED source with high Lumen/Watt ratio. Possibility of integrating an on/off Touch system into the edge.
Suitable for furnishing lighting and general lighting.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY

IP40

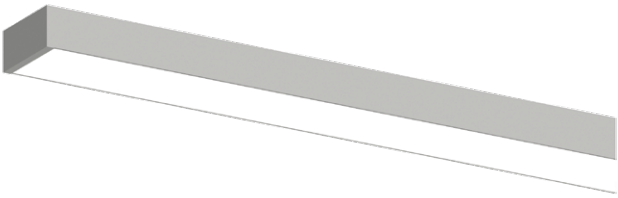



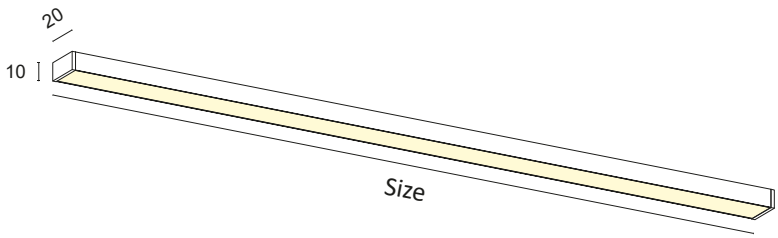

BASIC CODES

C2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- **1T** White
- **2T** Matt black
- **7T** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	E
G	25W/m	3500Lm/m	160LED/m S2835	CRI>80	D
L+	28W/m	3500Lm/m	160LED/m S2835	CRI>90	D
C2+	15W/m	1550Lm/m	COB LED	CRI>90	E

*Energy class referring to light source

DIFFUSER

- **S** BRUSHED

Code example:
C2 + White + Side supports white + C2 + 1000mm + 3000K + 16.8 W/m CRI>85 + Brushed diffuser = Code: C2.11HBCES

ACCESSORIES TO BE ORDERED SEPARATELY

BASIC CODES

NM.

WIDTH

- **L20** 20 mm




Magnetic adhesive tape for anodised aluminium profiles.
Supplied on a 10-metre reel, 1.2 mm thickness.
(Force of attraction >40g/cm².)

BASIC CODES

4965.

WIDTH

- **16** 16 mm



Double-sided adhesive tape for aluminium profiles and LED strips.
Supplied on a 50-metre reel.



LINEAR SUSPENSION SYSTEMS

JEY SUSPENSION 184
MAGNETIC JEY SUSPENSION 186
RHO SUSPENSION 188
DELTA SUSPENSION 190
KAPPA SUSPENSION 192
MAGNETIC KAPPA SUSPENSION 194

JEY SUSPENSION

J3.





Decorated, anodised aluminium suspension light complete with brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as technical decorative lighting for residential, commercial, office, retail and general lighting. Minimalist line, 'full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.

Constant 24Vdc voltage supply
Power supply included and integrated


MADE IN ITALY



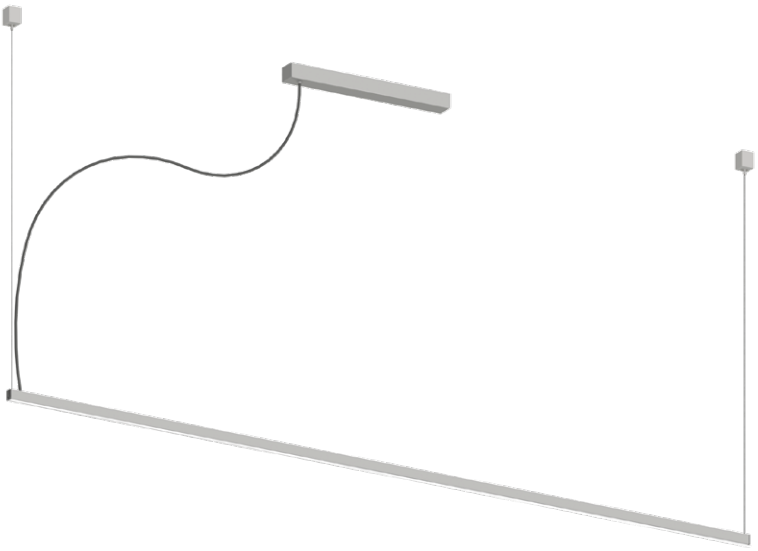




Profile section



Ceiling rose size

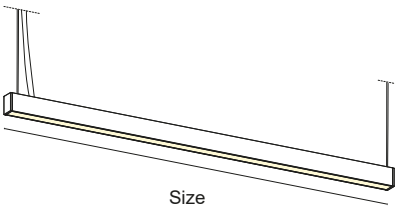

Size

BASIC CODES

J3.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

*Other finishes on request.

CABLE

- **T** Transparent
- **B** White
- **N** Black

SIZE

G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

E+	16.8W/m	2000Lm/m 140LED/m S2835 CRI>90	D
F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D

*Energy class referring to light source

DIFFUSER

S BRUSHED

POWER SUPPLY

- **N** ON/OFF
- **D** DALI + PUSH

Code example:
SUSPENSION JEY + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: J3.1NGBCL+SN

MAGNETIC JEY SUSPENSION

J4.





Decorated, anodised aluminium suspension light complete with brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as technical decorative lighting for residential, commercial, office, retail and general lighting. Minimalist line, 'full light' diffusion.
Suspension mounting with central magnetic ceiling rose, steel ropes and concealed screws; 3000 mm cable, choice of finish.

Constant 24Vdc voltage supply
Power supply included and integrated


MADE IN ITALY



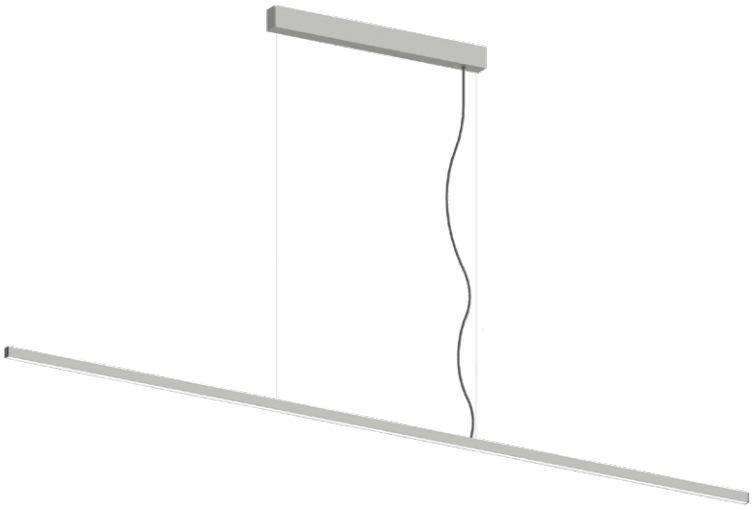




Profile section



Ceiling rose size

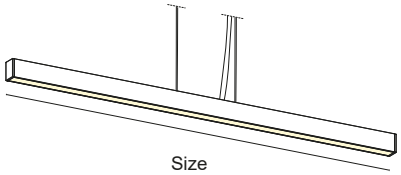

Size

BASIC CODES

J4.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

*Other finishes on request.

CABLE

- **T** Transparent
- **B** White
- **N** Black

SIZE

G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

E+	16.8W/m	2000Lm/m 140LED/m S2835 CRI>90	D (A↑G)
F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E (A↑G)
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D (A↑G)

*Energy class referring to light source

DIFFUSER

S BRUSHED

POWER SUPPLY

- **N** ON/OFF
- **D** DALI + PUSH

Code example:
SUSPENSION JEY MAGNETIC + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: J4.1NGBCL+SN

RHO SUSPENSION

R2.





Decorated, anodised aluminium suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as technical decorative lighting for residential, commercial, office, retail and general lighting. Minimalist line, 'full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.

Constant 24Vdc voltage supply
Power supply included and integrated


MADE IN ITALY



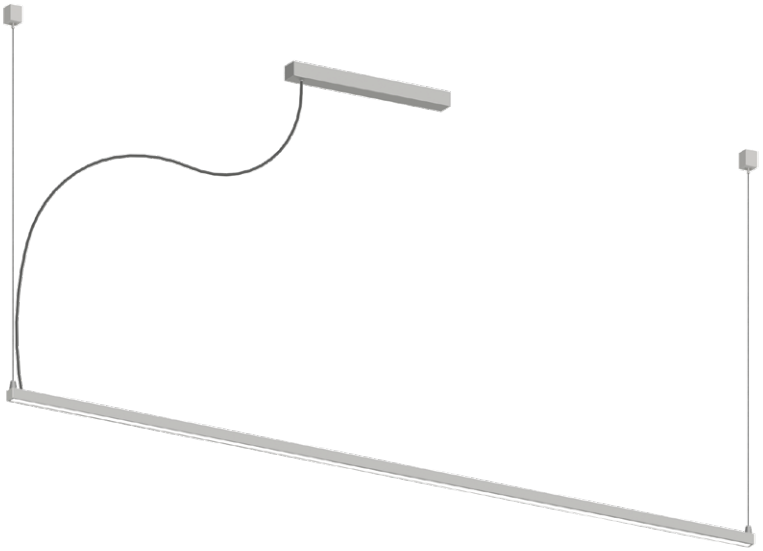




Profile section



Ceiling rose size

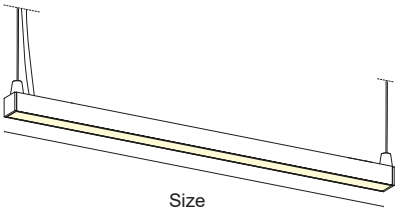

Size

BASIC CODES

R2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

*Other finishes on request.

CABLE

- **T** Transparent
- **B** White
- **N** Black

SIZE

- **G** 900mm
- **H** 1000mm
- **I** 1200mm
- **J** 1300mm
- **K** 1400mm
- **L** 1500mm
- **M** 1800mm
- **N** 2000mm
- **O** 2300mm
- **P** 2500mm
- **Q** 2800mm
- **R** 3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

E+	16.8W/m	2000Lm/m 140LED/m S2835 CRI>90	D (A↑G)
F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E (A↑G)
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D (A↑G)

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

POWER SUPPLY

- **N** ON/OFF
- **D** DALI + PUSH

Code example:
RHO SUSPENSION + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: R2.1NGBCL+SN

DELTA SUSPENSION

D2.





Decorated, anodised aluminium suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as primary technical decorative lighting for residential, commercial, office, retail and general lighting. 'Full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.

Constant 24Vdc voltage supply
Power supply included and integrated


MADE IN ITALY



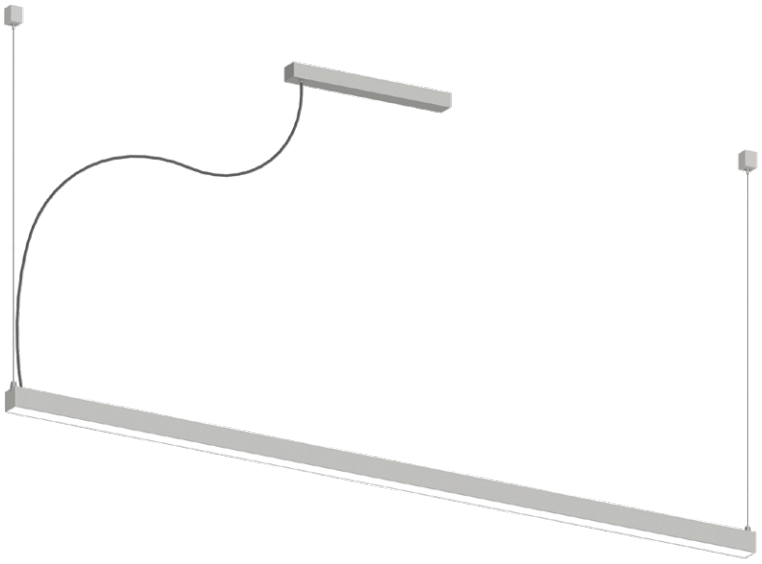




Profile section



Ceiling rose size

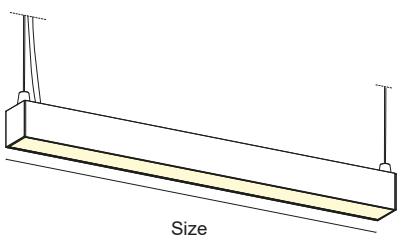

Size

BASIC CODES

D2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

*Other finishes on request.

CABLE

- **T** Transparent
- **B** White
- **N** Black

SIZE

G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D
M+	40W/m	5000Lm/m 480LED/m S2835 CRI>90	D

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED


POWER SUPPLY

- **N** ON/OFF
- **D** DALI + PUSH

Code example:
DELTA SUSPENSION + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: D2.1NGBCL+SN


COMPLEMENTARY SYSTEMS

EXAMPLE OF DELTA SUSPENSION AND REM PROJECTOR

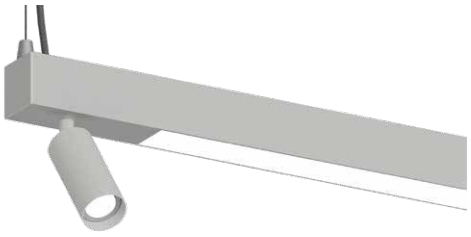


*Details on p. 276

EXAMPLE OF DELTA SUSPENSION AND DARK MODULE

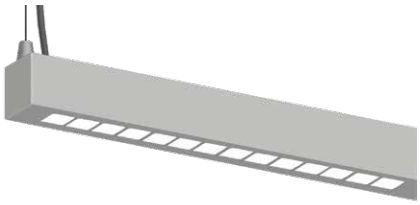

*Details on p. 276

EXAMPLE OF DELTA SUSPENSION, REM AND DARK MODULE

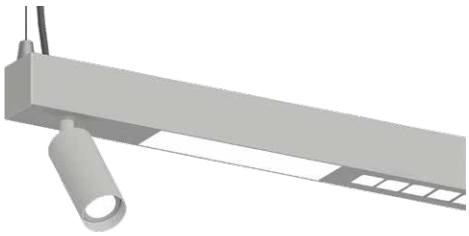

*Details on p. 276

KAPPA SUSPENSION

K2.





Decorated, anodised aluminium direct and indirect emission suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as primary technical decorative lighting for residential, commercial, office, retail and general lighting. 'Full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.

Constant 24Vdc voltage supply
Power supply included and integrated


MADE IN ITALY



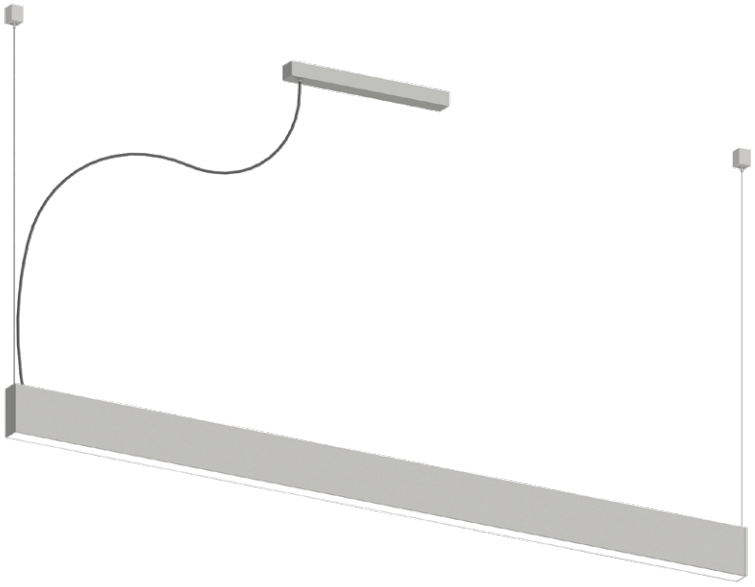


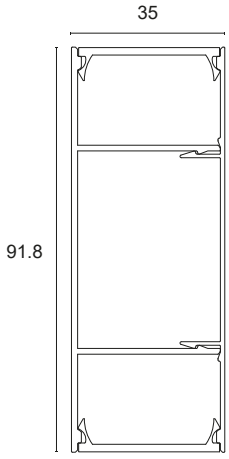

Profile section



Ceiling rose size

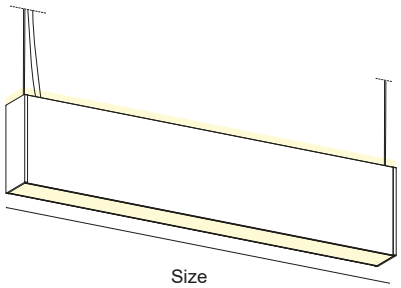

Size

BASIC CODES

K2.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

*Other finishes on request.

CABLE

- **T** Transparent
- **B** White
- **N** Black

SIZE

- **G** 900mm
- **H** 1000mm
- **I** 1200mm
- **J** 1300mm
- **K** 1400mm
- **L** 1500mm
- **M** 1800mm
- **N** 2000mm
- **O** 2300mm
- **P** 2500mm
- **Q** 2800mm
- **R** 3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D
M+	40W/m	5000Lm/m 480LED/m S2835 CRI>90	D

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

*Indirect diffuser, brushed.

POWER SUPPLY


- **N** ON/OFF
- **D** DALI + PUSH

*The lamp can be customised with independent switch-on and dimming on request.

Code example:
KAPPA SUSPENSION + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: K2.1NGBCL+SN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA SUSPENSION AND REM PROJECTOR

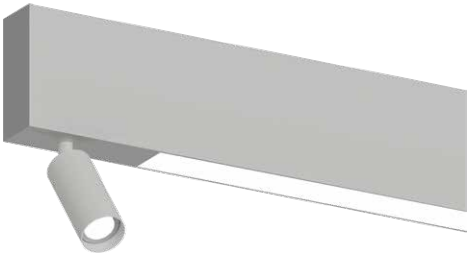


*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION AND DARK MODULE

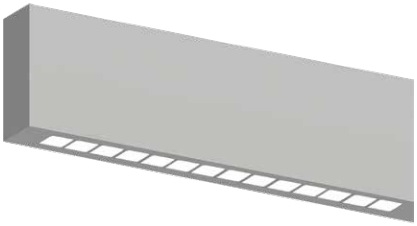

*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION, REM AND DARK MODULE

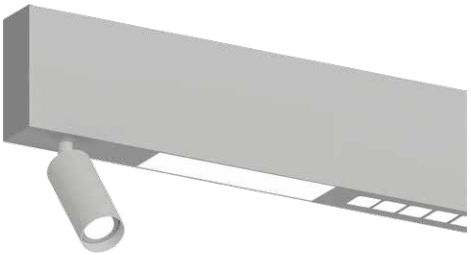

*Details on p. 276

MAGNETIC KAPPA SUSPENSION

K4.





Decorated, anodised aluminium direct and indirect emission suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as primary technical decorative lighting for residential, commercial, office, retail and general lighting. 'Full light' diffusion.
Suspension mounting with central magnetic ceiling rose, steel ropes and concealed screws; 3000 mm cable, choice of finish.

Constant 24Vdc voltage supply
Power supply included and integrated


MADE IN ITALY



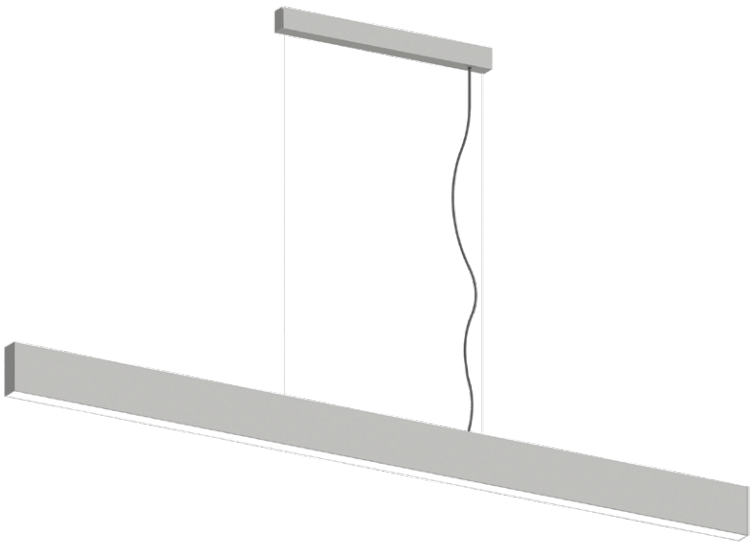


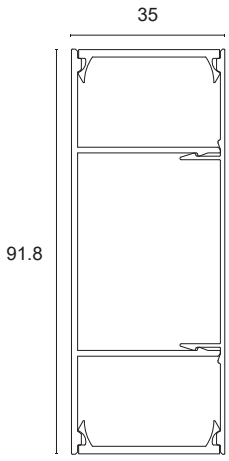

Profile section



Ceiling rose size

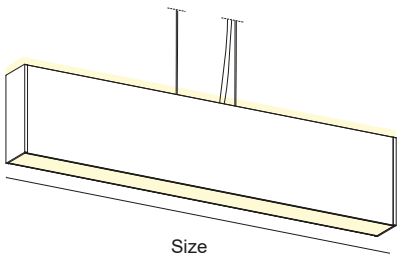

Size

BASIC CODES

K4.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

*Other finishes on request.

CABLE

- **T** Transparent
- **B** White
- **N** Black

SIZE

- **G** 900mm
- **H** 1000mm
- **I** 1200mm
- **J** 1300mm
- **K** 1400mm
- **L** 1500mm
- **M** 1800mm
- **N** 2000mm
- **O** 2300mm
- **P** 2500mm
- **Q** 2800mm
- **R** 3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D
M+	40W/m	5000Lm/m 480LED/m S2835 CRI>90	D

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

*Indirect diffuser, brushed.

POWER SUPPLY


- **N** ON/OFF
- **D** DALI + PUSH

*The lamp can be customised with independent switch-on and dimming on request.

Code example:
SUSPENSION KAPPA MAGNETIC + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + ON/OFF = Code: K4.1NGBCL+SN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA SUSPENSION AND REM PROJECTOR

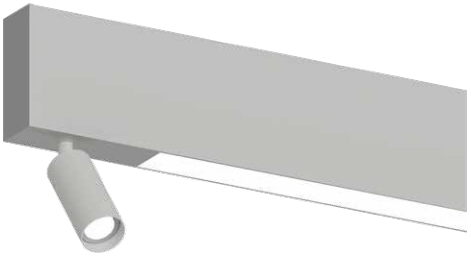


*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION AND DARK MODULE

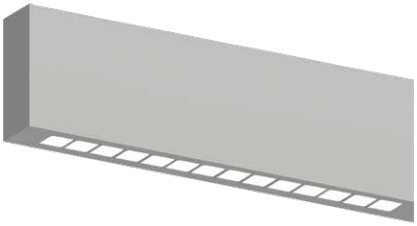

*Details on p. 276

EXAMPLE OF KAPPA SUSPENSION, REM AND DARK MODULE

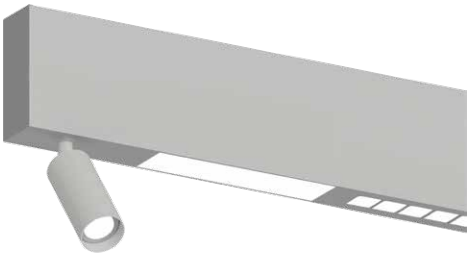

*Details on p. 276




LINEAR WALL SYSTEMS

KAPPA 1 198
JEY 5 200


KAPPA 1

K1.

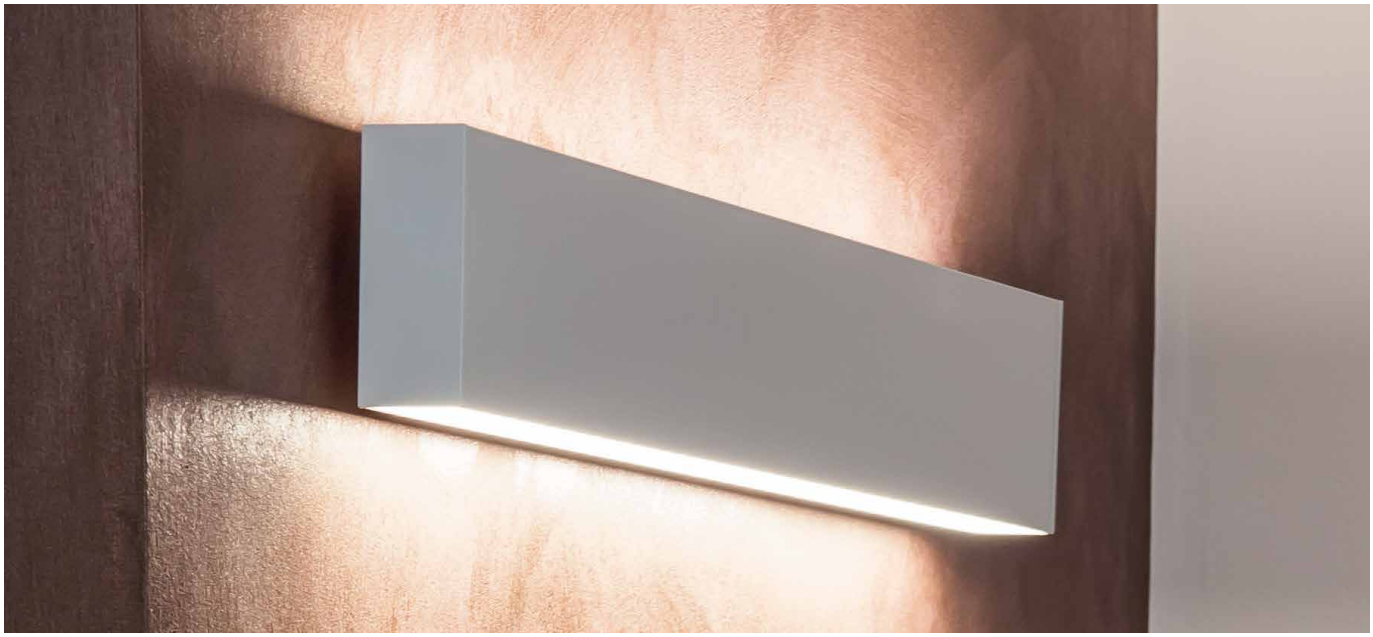


Decorated anodised dual-emission aluminium lamp complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Wall mounting with concealed brackets.


Constant voltage supply 24Vdc
Power supply included and integrated

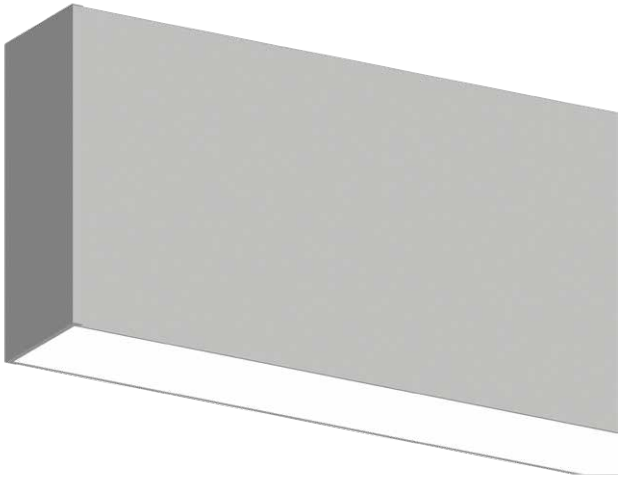

MADE IN ITALY



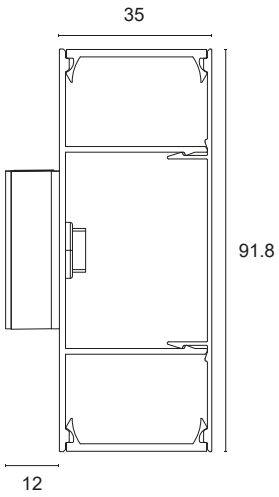

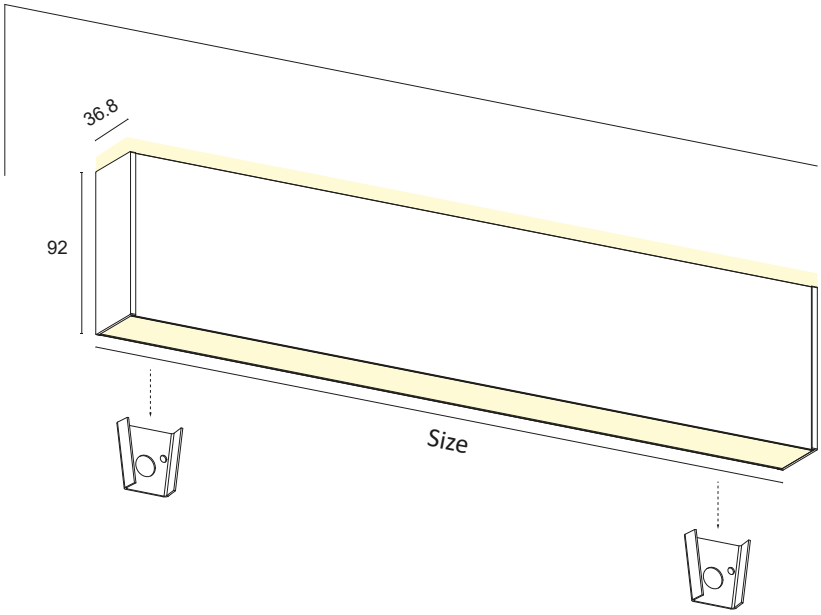

BASIC CODES

K1.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

A	300mm
B	450mm
C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

F	20.2W/m	2500Lm/m 168LED/m S2835 CRI>85	E
F+	20.2W/m	2500Lm/m 168LED/m S2835 CRI>90	E
G	25W/m	3500Lm/m 160LED/m S2835 CRI>80	D
L+	28W/m	3500Lm/m 160LED/m S2835 CRI>90	D
H	30W/m	4500Lm/m 240LED/m S2835 CRI>80	C
M+	40W/m	5000Lm/m 480LED/m S2835 CRI>90	D

*Energy class referring to light source

DIFFUSER

- **M** MICROPRISMATIC
- **S** BRUSHED

POWER SUPPLY


- **N** ON/OFF
- **D** DALI + PUSH

*The lamp can be customised with independent switch-on and dimming on request.

Code example:
KAPPA 1 + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser + ON/OFF = Code: K1.11HBCGSN


COMPLEMENTARY SYSTEMS

EXAMPLE OF KAPPA WALL LIGHT AND REM PROJECTOR

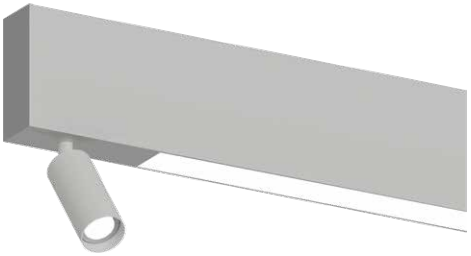


*Details on p. 276

EXAMPLE OF KAPPA WALL LIGHT AND DARK MODULE

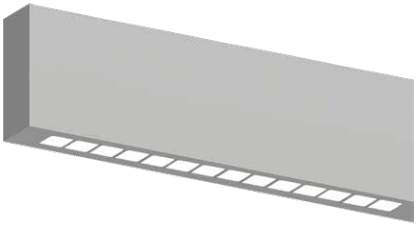

*Details on p. 276

EXAMPLE OF KAPPA WALL LIGHT, REM AND DARK MODULE

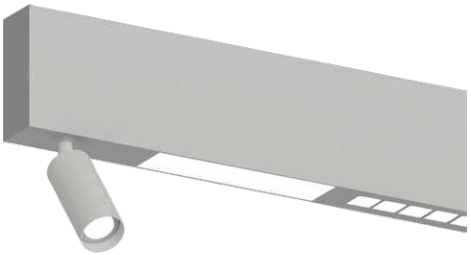

*Details on p. 276

JEY 5

J5.




Decorated anodised aluminium lamp complete with brushed diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for decorative, accent, courtesy and general lighting.
Wall mounting with concealed screws.


Constant 24Vdc voltage supply
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249

MADE IN ITALY



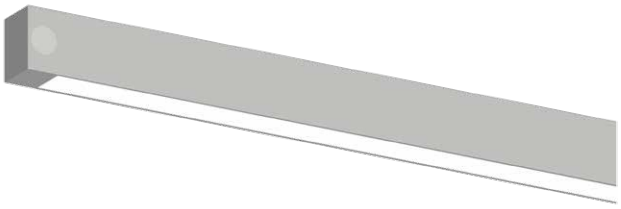



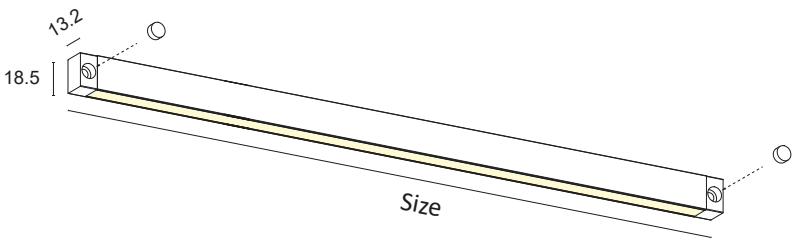

BASIC CODES

J5.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **5** Grey
- **7** Brushed aluminium

SIZE

C	500mm
D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB.

POWER

D	10W/m	1400Lm/m	98LED/m S2835	CRI>85	D
D+	10W/m	1600Lm/m	112LED/m S2835	CRI>90	C
E	16.8W/m	2000Lm/m	140LED/m S2835	CRI>85	D
E+	16.8W/m	2000Lm/m	140LED/m S2835	CRI>90	D
F	20.2W/m	2500Lm/m	168LED/m S2835	CRI>85	E
F+	20.2W/m	2500Lm/m	168LED/m S2835	CRI>90	E
C1+	10W/m	1050Lm/m	LED COB	CRI>90	E

*Energy class referring to light source

DIFFUSER

S BRUSHED

Code example:
JEY 5 + White + Side supports white + 1000mm + 3000K + 10W/m CRI>85 + Brushed diffuser = Code: J5.11HBCDS



DIRECTIONAL LINEAR SYSTEMS

DIRECTIONAL RHO 204
DIRECTIONAL DELTA 206

DIRECTIONAL RHO

R4.



Decorated anodised aluminium lamp complete with satin or microprismatic diffuser and high-brightness LED source with high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Ceiling mounting with directional steel brackets.


Constant voltage supply 24Vdc
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY

IP40

*On request IP54 or IP65

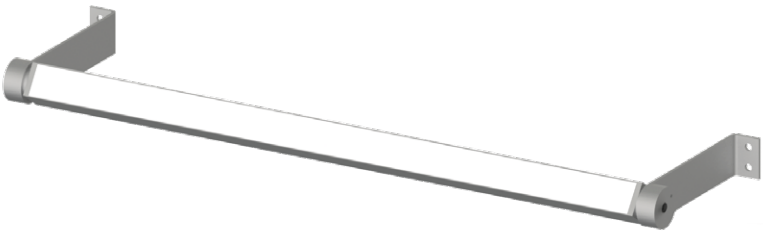

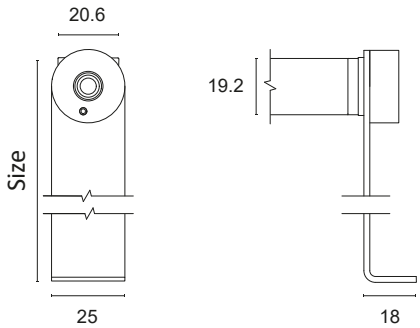

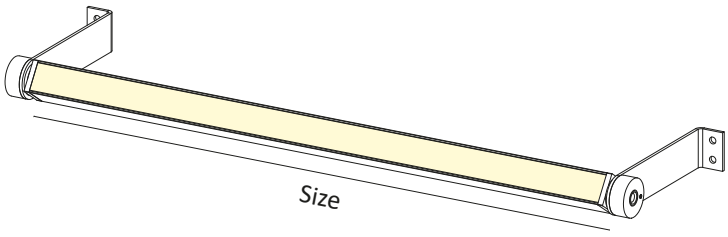

BASIC CODES

R4.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

BRACKET SIZE

1	50mm
2	100mm
3	200mm

SIZE

G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

IP65	**D65**	10W/m	1400Lm/m	98LED/m	S2835	CRI>85
IP54	**E54**	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85
IP54	**F54**	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
	F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
	F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90
	G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80
	L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90
	H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80

D	A↑G
D	A↑G
E	A↑G
E	A↑G
E	A↑G
D	A↑G
D	A↑G
C	A↑G

*Energy class referring to light source

DIFFUSER

M	MICROPRISMATIC
S	BRUSHED

Code example:
RHO DIRECTIONAL + White + Bracket 100mm + 1000mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: R4.12HBCFS

DIRECTIONAL DELTA

D4



Decorated anodised aluminium lamp complete with satin or microprismatic diffuser and high-brightness LED source with high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Ceiling mounting with directional steel brackets.


Constant voltage supply 24Vdc
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY

IP40

*On request IP54 or IP65

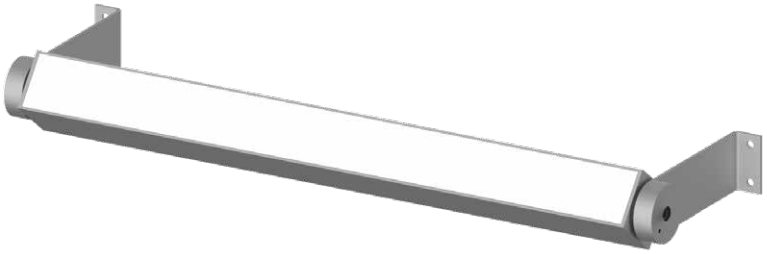

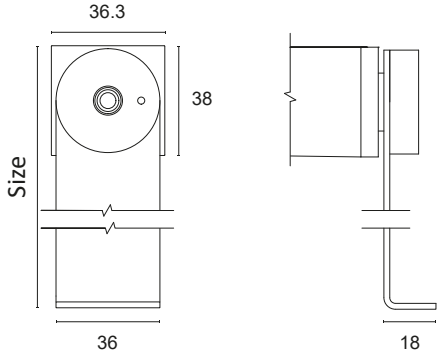

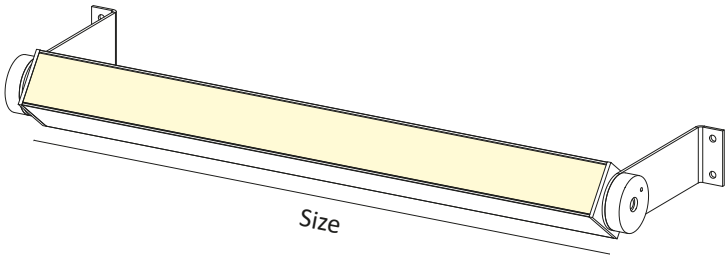

BASIC CODES

D4.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

BRACKET SIZE

1	50mm
2	100mm
3	200mm

SIZE

G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

IP65	**D65**	10W/m	1400Lm/m	98LED/m	S2835	CRI>85
IP54	**E54**	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85
IP54	**F54**	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
	F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85
	F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90
	G	25W/m	3500Lm/m	160LED/m	S2835	CRI>80
	L+	28W/m	3500Lm/m	160LED/m	S2835	CRI>90
	H	30W/m	4500Lm/m	240LED/m	S2835	CRI>80

D	A↑G
D	A↑G
E	A↑G
E	A↑G
E	A↑G
D	A↑G
D	A↑G
C	A↑G

*Energy class referring to light source

DIFFUSER

M	MICROPRISMATIC
S	BRUSHED

Code example:
DELTA DIRECTIONAL + White + Bracket 100mm + 1000mm + 3000K + 20.2W/m CRI>85 + Satin Diffuser = Code: D4.12HBCFS


CHANEL
CHANEL
CHANEL
CHANEL
CHANEL
CHANEL

FLOOR LINEAR SYSTEM

YPSILON FLOOR LIGHT 210

YPSILON FLOOR LIGHT

Y3.



Decorated anodised aluminium lamp complete with floor-fitting brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. The interlocking profile mechanism allows for easy maintenance. Flush fitting in plasterboard, brickwork or floor.

Constant voltage supply 24Vdc
Parallel connection, 50 cm cable


Constant voltage power supplies page 237
Dimming Accessories page 249


MADE IN ITALY

IP40 F

*On request IP54 or IP65





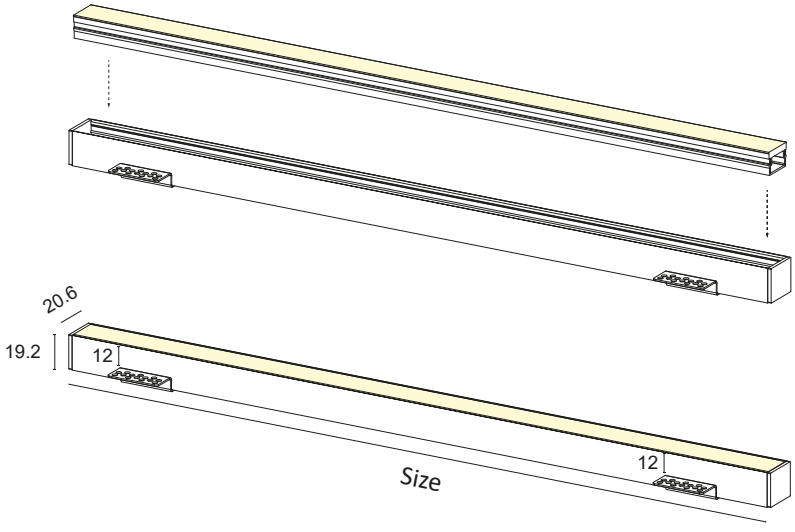

BASIC CODES

Y3.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium

*Other finishes on request.

SIDE SUPPORTS

- **1** White
- **2** Matt black
- **7** Brushed aluminium

SIZE

D	600mm
E	700mm
F	800mm
G	900mm
H	1000mm
I	1200mm
J	1300mm
K	1400mm
L	1500mm
M	1800mm
N	2000mm
O	2300mm
P	2500mm
Q	2800mm
R	3000mm

LED COLOUR

- **BN** 4000K
- **BC** 3000K
- **CC** 2700K

*Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

IP65	**D65**	10W/m	1400Lm/m	98LED/m	S2835	CRI>85 D
IP54	**E54**	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85 D
	E	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>85 D
	E+	16.8W/m	2000Lm/m	140LED/m	S2835	CRI>90 D
	F	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>85 E
	F+	20.2W/m	2500Lm/m	168LED/m	S2835	CRI>90 E

*Energy class referring to light source

DIFFUSER

S BRUSHED

Code example:
YPSILON FLOOR LIGHT + White + Side supports white + 1000mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: Y3.11HBCFS



RGB SYSTEMS

SKY RGB 214
ALGOL RGB 215
HALLEY RGB 216
EOS RGB 217
BASIK 1 RGB 218
BASIK Q RGB 219
BIONIK 1 RGB 220
BIONIK Q RGB 221
FOUR HOLE RGB 222
FOUR HOLE Q RGB 223
DEHO 2 RGB 224
DEHO Q RGB 225
ACSO 1 RGB 226
VERTIGO RGB 227
DUVAR RGB 228

SKY RGB

L90.




Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating an RGB 'starry sky' effect.
Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED
Power: 0.3W
Power supply with 12Vdc constant voltage control unit, only with CNL/RGB box
Mandatory connection with CNL/RGB box, cable 150 cm

Compulsory accessories for connection page 247
Accessories for RGB management page 249



MADE IN ITALY



BASIC CODES	FINISHES	LED COLOUR
L90.	**1** White **2** Matt black **6** Chrome	**RGB**

Code example:
SKY RGB + Chrome + RGB = Code: L90.6RGB

ALGOL RGB


L80.



Flush-fitted in polished aluminium for decoration and courtesy lighting. Suitable for creating an RGB 'starry sky' effect.
Can be installed indoors and outdoors if partially protected, spring-mounted.


5mm high-brightness LED
Power: 0.3W
Power supply with 12Vdc constant voltage control unit, only with CNL/RGB box
Mandatory connection with CNL/RGB box, cable 150 cm

Compulsory accessories for connection page 247
Accessories for RGB management page 249



MADE IN ITALY






BASIC CODES	FINISHES	LED COLOUR
L80.	**1** White **2** Matt black **6** Chrome	**RGB**

Code example:
ALGOL RGB + Chrome + RGB = Code: L80.6RGB

HALLEY RGB

L31.

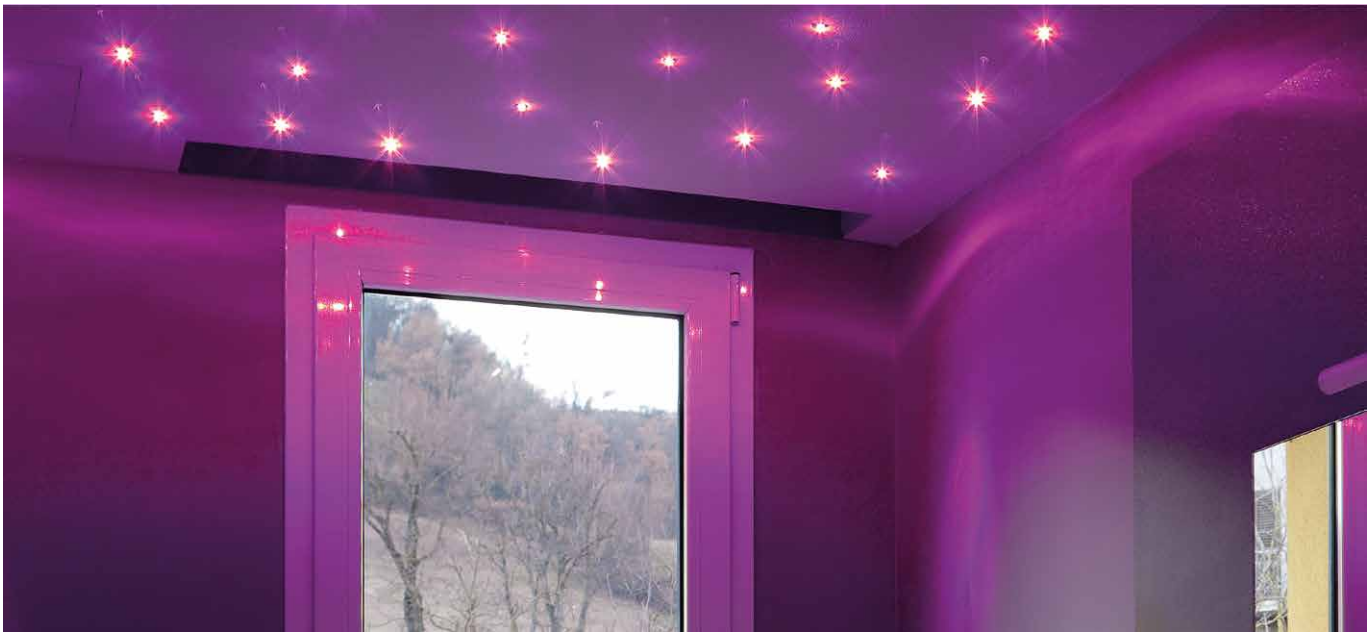


Flush-fitted in polished aluminium for accent, decoration and courtesy RGB lighting. Also indicated for 'starry sky'.
Can be installed indoors and outdoors if partially protected, spring-mounted.

5mm high-brightness LED
Power: 0.3W
Power supply with 12Vdc constant voltage control unit, only with CNL/RGB box
Mandatory connection with CNL/RGB box, cable 150 cm

Compulsory accessories for connection page 247
Accessories for RGB management page 249



MADE IN ITALY



BASIC CODES	FINISHES	GLASS	LED COLOUR
L31.	**1** White **2** Matt black **6** Chrome **7** Brushed aluminium	**T** Transparent	**RGB**

Code example:
HALLEY RGB + White + Clear Glass + RGB = Code: L31.1TRGB

EOS RGB

L95.




Flush-fitted in thermoplastic with power RGB for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



MADE IN ITALY



BASIC CODES

L95.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LIGHT BAND

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **RGB**

Code example:
EOS RGB + Brushed Aluminium + 15° light beam + RGB = Code: L95.715RGB

BASIK 1 RGB

L01.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.


Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



MADE IN ITALY





BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L01.	**1** White	**15** 15°	**RGB**
	2 Matt black	**25** 25°	
	5 Gloss aluminium	**40** 40°	
	6 Chrome	**60** 60°	
	7 Brushed aluminium	**80** 80°	

Code example:
BASIK 1 RGB + Brushed Aluminium + 15° light beam + RGB = Code: L01.715RGB

BASIK Q RGB


L02.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.


Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



MADE IN ITALY





BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L02.	**1** White	**15** 15°	**RGB**
	2 Matt black	**25** 25°	
	5 Gloss aluminium	**40** 40°	
	6 Chrome	**60** 60°	
	7 Brushed aluminium	**80** 80°	

Code example:
BASIK Q RGB + Brushed Aluminium + 15° light beam + RGB = Code: L02.715RGB

BIONIK 1 RGB

L21.




Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.

Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



MADE IN ITALY

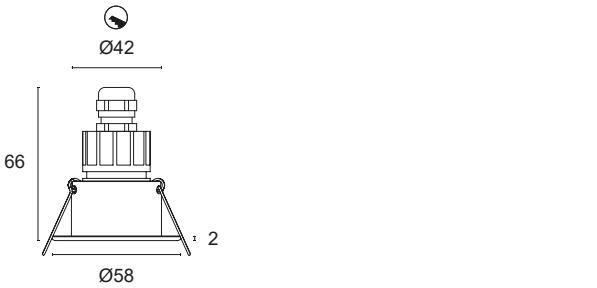

BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L21.	**1** White	**15** 15°	**RGB**
	2 Matt black	**25** 25°	
	5 Gloss aluminium	**40** 40°	
	6 Chrome	**60** 60°	
	7 Brushed aluminium	**80** 80°	

Code example:
BIONIK 1 RGB + Brushed Aluminium + 15° light beam + RGB = Code: L21.715RGB

BIONIK Q RGB

L22.




Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.

Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



MADE IN ITALY

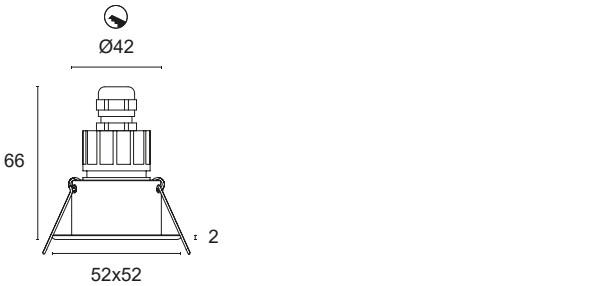

BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L22.	**1** White	**15** 15°	**RGB**
	2 Matt black	**25** 25°	
	5 Gloss aluminium	**40** 40°	
	6 Chrome	**60** 60°	
	7 Brushed aluminium	**80** 80°	

Code example:
BIONIK Q RGB + Brushed Aluminium + 15° light beam + RGB = Code: L22.715RGB

FOUR HOLE RGB

L24.




Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



MADE IN ITALY

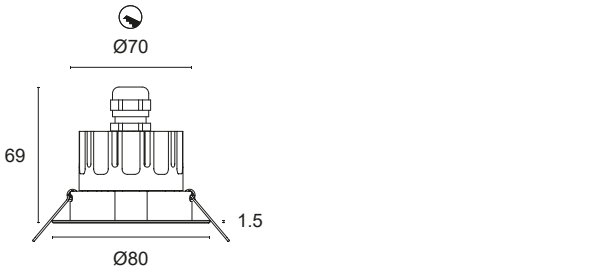

BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L24.	**1** White	**10** 10°	**RGB**
	2 Matt black	**35** 35°	
	5 Gloss aluminium	**60** 60°	
	7 Brushed aluminium	**80** 80°	

Code example:
FOUR HOLE RGB + White + 80° light beam + RGB = Code: L24.180RGB

FOUR HOLE Q RGB

L25.



Turned and decorated aluminium recessed light with powerful RGB LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics, can be flush fitted indoors. Flush-mounted with springs.


Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Accessories for RGB management page 249



MADE IN ITALY





BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L25.	**1** White	**10** 10°	**RGB**
	2 Matt black	**35** 35°	
	5 Gloss aluminium	**60** 60°	
	7 Brushed aluminium	**80** 80°	

Code example:
FOUR HOLE Q RGB + White + 80° light beam + RGB = Code: L25.180RGB

DEHO 2 RGB

L402.



Polished 304 steel casing with powerful RGB LEDs suitable for decorative lighting and as step markers.
Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables


Installation accessories page 271
Accessories for RGB management page 249



MADE IN ITALY

IP67

KG 0.12



BASIC CODES	LIGHT BAND	GLASS	LED COLOUR
L402.	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**T** Transparent	**RGB**

Code example:
DEHO 2 RGB + Light Beam 25° + Clear Glass + RGB = Code: L402.25TRGB

DEHO Q RGB

L405.




Polished 304 steel casing with powerful RGB LEDs suitable for decorative lighting and as step markers.
Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Installation accessories page 271
Accessories for RGB management page 249



MADE IN ITALY

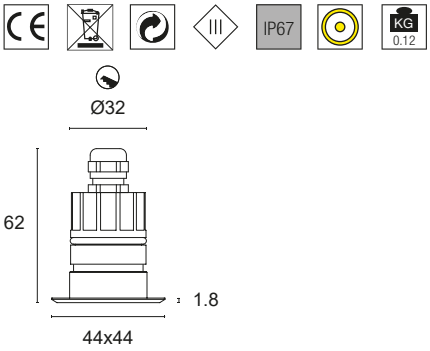

BASIC CODES	LIGHT BAND	GLASS	LED COLOUR
L405.	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**T** Transparent	**RGB**

Code example:
DEHO Q RGB + Light Beam 25° + Clear Glass + RGB = Code: L405.25TRGB

ACSO 1 RGB

L601.




Polished 304 steel casing with powerful RGB LEDs suitable for decorative lighting and as step markers.
Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Installation accessories page 270
Accessories for RGB management page 249



MADE IN ITALY

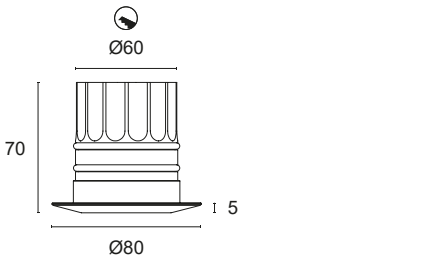

BASIC CODES	LIGHT BAND	GLASS	LED COLOUR
L601.	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**T** Transparent	**RGB**

Code example:
ACSO 1 RGB + Light Beam 25° + Clear Glass + RGB = Code: L601.25TRGB

VERTIGO RGB

L14.



Directional projector made of polished aluminium with powerful RGB LEDs suitable for illuminating architectural facades, shop windows or gardens. Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors, with screw brackets.




Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Installation accessories page 272
Accessories for RGB management page 249

MADE IN ITALY



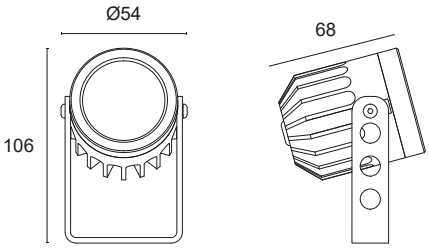

BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L14.	**2** Matt black **7** Brushed aluminium	**10** 10° **35** 35° **60** 60° **80** 80°	**RGB**

Code example:
VERTIGO RGB + Brushed Aluminium + 10° light beam + RGB = Code: L14.710RGB

DUVAR RGB

L23.



Directional projector made of polished aluminium with powerful RGB LEDs suitable for decorative lighting of architectural facades, shop windows or gardens. Choice of secondary optics, can be fitted in the floor, wall or in plasterboard indoors and outdoors, with screw brackets, base or spike.


Power LED CRI>80
Power: 3W@350mA
350mA constant current power supply
Series connection, with 70 + 70 cm cables

Installation accessories page 272
Accessories for RGB management page 249



MADE IN ITALY





BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR
L23.	**2** Matt black **7** Brushed aluminium	**15** 15° **25** 25° **35** 35°	**RGB**

Code example:
DUVAR RGB + Brushed Aluminium + 15° light beam + RGB = Code: L23.715RGB






POWER SUPPLIES


350mA CONSTANT CURRENT 232
500mA CONSTANT CURRENT 233
CONSTANT CURRENT FOR COB 234
MULTICURRENT 235
CONSTANT VOLTAGE 12Vdc 236
CONSTANT VOLTAGE 24Vdc 237
CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH 239
EMERGENCY DEVICE 241

350mA CONSTANT CURRENT


CODE	DESCRIPTION
AL35004IP	Power supply ON/OFF constant current 350mA 4W IN/OUT cables, IP65 Vin 220-240Vac 1 to 3 LEDs Dimensions mm 38x28x22H




CODE	DESCRIPTION
AL1435IP	Power supply ON/OFF constant current 350mA 14W IN/OUT cables, IP67 Vin 220-240Vac 1 to 12 LEDs Sizes mm 70x38x25H




CODE	DESCRIPTION
AL141132	Power supply ON/OFF constant current 350mA 8W Protected screw terminals, IP20 Vin 110-240Vac 1 to 7 LEDs Sizes mm 59x42x22H



CODE	DESCRIPTION
AL127713	Power supply ON/OFF constant current 350mA 14.5W Protected screw terminals, IP20 Vin 110-240Vac 1 to 12 LEDs Sizes mm 115x34x20H




CODE	DESCRIPTION
AL127303	Power supply ON/OFF constant current 350mA 10W Protected screw terminals, IP20 Vin 110-240Vac 1 to 9 LEDs Sizes mm 112x38x22H




500mA CONSTANT CURRENT


CODE	DESCRIPTION
AL50004IP	Power supply ON/OFF constant current 500mA 4W IN/OUT cables, IP65 Vin 220-240Vac 1 to 2 LEDs Dimensions mm 38x28x22H




CODE	DESCRIPTION
AL50020IP	Power supply ON/OFF constant current 500mA 17.5W IN/OUT cables, IP67 Vin 110-240Vac 2 to 10 LEDs Sizes mm 118x35x26H




CODE	DESCRIPTION
AL141131	Power supply ON/OFF constant current 500mA 6W Protected screw terminals, IP20 Vin 110-240Vac 1 to 3 LEDs Sizes mm 59x42x22H




CODE	DESCRIPTION
AL122248	Power supply ON/OFF constant current 500mA 20W Protected screw terminals, IP20 Vin 110-240Vac 1 to 12 LEDs Sizes mm 112x38x27H




CODE	DESCRIPTION
AL127711	Power supply ON/OFF constant current 500mA 12W Protected screw terminals, IP20 Vin 110-240Vac 1 to 7 LEDs Sizes mm 115x35x20H




CODE	DESCRIPTION
AL50022IP	Power supply ON/OFF constant current 500mA 22W IN/OUT cables, IP65 Vin 110-240Vac 3 to 10 LEDs Sizes mm 80x73x30H





CODE	DESCRIPTION
AL1450IP	Power supply ON/OFF constant current 500mA 14W IN/OUT cables, IP67 Vin 220-240Vac 1 to 7 LEDs Sizes mm 70x38x25H





CONSTANT CURRENT FOR COB


CODE	DESCRIPTION
AL20009 	Power supply ON/OFF constant current 200mA 9W IN/OUT cables, IP20 Vin 220-240Vac Sizes mm 48x34x24H

CODE	DESCRIPTION
AL1020IP 	Power supply ON/OFF constant current 200mA 8W IN/OUT cables, IP67 Vin 220-240Vac Sizes mm 70x38x25H


CODE	DESCRIPTION
AL25012 	Power supply ON/OFF constant current 250mA 10W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 100x38x25H

CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
AL45018.MULTI 	Multicurrent ON/OFF power supply 200-450mA 18.9W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 98x44x30H	200mA 8.4W 240mA - 10.1W 300mA - 12.6W 350mA 14.7W 400mA - 16.8W 450mA 18.9W	24-42Vdc - 18.9W


CODE	DESCRIPTION	CONSTANT CURRENT
AL105042.D2 	Multicurrent Power Supply DIMMABLE DALI2 and PUSH 150-1050mA 42W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 131x43x30H	150mA - 7.8W 200mA - 10.4W 250mA - 13W 300mA - 15.6W 350mA - 18.2W 400mA - 20.8W 500mA - 26W 600mA - 31.2W 700mA - 36.4W 750mA - 39W 800mA - 41.6W 850mA - 41.65W 900mA - 41.4W 950mA - 41.8W 1000mA - 42W




DALI wiring diagram




PUSH wiring diagram


CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
AL122201 	Multicurrent ON/OFF power supply 250-700mA 20W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 112x52x22H	250mA - 13W min 3 - max 16 LEDs 350mA - 19W min 1 - max 16 LEDs 400mA - 20W min 1 - max 15 LEDs 450mA - 20W min 1 - max 13 LEDs 500mA - 20W min 1 - max 12 LEDs 550mA - 20W min 1 - max 11 LEDs 600mA - 20W min 1 - max 10 LEDs 700mA - 20W min 1 - max 9 LEDs	24Vdc - 16W

CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
AL125400 	Multicurrent Power Supply PUSH DIMMABLE 250-900mA 20W Protected pressure terminals, IP20 Vin 110-240Vac Sizes mm 112x52x22H	250mA - 13W min 6 - max 16 LEDs 300mA - 15W min 6 - max 16 LEDs 350mA - 18W min 4 - max 15 LEDs 400mA - 20W min 4 - max 15 LEDs 450mA - 20W min 1 - max 14 LEDs 500mA - 20W min 1 - max 12 LEDs 550mA - 20W min 1 - max 11 LEDs 600mA - 20W min 1 - max 10 LEDs 650mA - 20W min 1 - max 9 LEDs 700mA - 20W min 1 - max 9 LEDs 750mA - 20W min 1 - max 8 LEDs 800mA - 20W min 1 - max 7 LEDs 850mA - 20W min 1 - max 7 LEDs 900mA - 20W min 1 - max 7 LEDs	12Vdc - 11W 24Vdc - 20W


PUSH Dimmer



PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT CURRENT
AL70012.D2 	Multicurrent Power Supply DIMMABLE DALI2 and PUSH 150-700mA 12W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 120x30x20H	150mA - 6.3W min 1 - max 13 LEDs 200mA - 8.4W min 1 - max 13 LEDs 250mA - 10.5W min 1 - max 13 LEDs 300mA - 12W min 1 - max 12 LEDs 350mA - 12W min 1 - max 10 LEDs 500mA - 12W min 1 - max 7 LEDs 600mA - 12W min 1 - max 6 LEDs 700mA - 12W min 1 - max 5 LEDs

DALI Bus



DALI wiring diagram


PUSH Dimmer




PUSH wiring diagram

CONSTANT VOLTAGE 12Vdc


CODE	DESCRIPTION
AL12004	Constant voltage power supply ON/OFF 12Vdc 4W IN/OUT cables, IP65 Vin 220-240Vac Dimensions mm 38x28x21H




CODE	DESCRIPTION
AL12015	Constant voltage power supply ON/OFF 12Vdc 15W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL12020	Constant voltage power supply ON/OFF 12Vdc 20W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL12030B	Constant voltage power supply ON/OFF 12Vdc 30W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 155x53x16H




CODE	DESCRIPTION
AL12035IP	Constant voltage power supply ON/OFF 12Vdc 36W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 150x40x30H




CODE	DESCRIPTION
AL12050	Constant voltage power supply ON/OFF 12Vdc 50W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 185x64x22H




CODE	DESCRIPTION
AL12075	Constant voltage power supply ON/OFF 12Vdc 75W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 184x61x32H




CODE	DESCRIPTION
AL12100	Constant voltage power supply ON/OFF 12Vdc 100W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 184x61x32H



CODE	DESCRIPTION
AL12100IP	Constant voltage power supply ON/OFF 12Vdc 100W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 190x52x37H




CODE	DESCRIPTION
AL12150	Constant voltage power supply ON/OFF 12Vdc 150W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 210x67x34H




CONSTANT VOLTAGE 24Vdc


CODE	DESCRIPTION
AL24015	Constant voltage power supply ON/OFF 24Vdc 15W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL24020	Constant voltage power supply ON/OFF 24Vdc 20W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 103x36x16H




CODE	DESCRIPTION
AL24030B	Constant voltage power supply ON/OFF 24Vdc 30W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 155x53x16H




CODE	DESCRIPTION
AL24035IP	Constant voltage power supply ON/OFF 24Vdc 35W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 150x40x30H




CODE	DESCRIPTION
AL24050B	Constant voltage power supply ON/OFF 24Vdc 50W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 185x64x22H




CODE	DESCRIPTION
AL24060	Constant voltage power supply ON/OFF 24Vdc 60W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 160x58x18H




CODE	DESCRIPTION
AL24060IP	Constant voltage power supply ON/OFF 24Vdc 60W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 162x43x32H




CODE	DESCRIPTION
AL24060S	Constant voltage power supply ON/OFF 24Vdc 60W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 305x30x18H




CODE	DESCRIPTION
AL24075	Constant voltage power supply ON/OFF 24Vdc 75W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 184x61x32H




CODE	DESCRIPTION
AL24075S	Constant voltage power supply ON/OFF 24Vdc 75W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 305x30x18H




CODE	DESCRIPTION
AL24075X	Constant voltage power supply ON/OFF 24Vdc 75W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 168x38x30H




CODE	DESCRIPTION
AL24100	Constant voltage power supply ON/OFF 24Vdc 100W Protected screw terminals, IP20 Vin 110-240Vac Sizes mm 184x61x32H




CODE	DESCRIPTION
AL24100B	Constant voltage power supply ON/OFF 24Vdc 100W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 177x57x18H




CODE	DESCRIPTION
AL24100IP	Constant voltage power supply ON/OFF 24Vdc 100W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 140x63x32H




CODE	DESCRIPTION
AL24100S	Constant voltage power supply ON/OFF 24Vdc 100W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 320x30x18H




CODE	DESCRIPTION
AL24120	Constant voltage power supply ON/OFF 24Vdc 120W Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 227x38x30H




CODE	DESCRIPTION
AL24150	Constant voltage power supply ON/OFF 24Vdc 150W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 210x67x34H




CODE	DESCRIPTION
AL24150IP	Constant voltage power supply ON/OFF 24Vdc 150W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 180x63x35H




CODE	DESCRIPTION
AL24150S	Constant voltage power supply ON/OFF 24Vdc 150W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 335x30x22H




CODE	DESCRIPTION
AL24200	Constant voltage power supply ON/OFF 24Vdc 200W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 195x68x32H




CODE	DESCRIPTION
AL24200IP	Constant voltage power supply ON/OFF 24Vdc 200W IN/OUT cables, IP67 Vin 110-240Vac Sizes mm 199x63x36H



CODE	DESCRIPTION
AL24240S	Constant voltage power supply ON/OFF 24Vdc 240W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 357x32x23H





CODE	DESCRIPTION
AL24250	Constant voltage power supply ON/OFF 24Vdc 250W Protected screw terminals, IP20 Vin 220-240Vac Sizes mm 195x68x32H




CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24045.D2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 187x45x31H	24Vdc - 45W







DALI wiring diagram




PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24060.SD2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 362x30x21H	24Vdc - 60W







DALI wiring diagram




PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24080.D2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 290x45x31H	24Vdc - 80W






DALI wiring diagram




PUSH wiring diagram

CONSTANT VOLTAGE 24Vdc DALI2 AND PUSH

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24150.D2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 290x45x31H	24Vdc - 150W




DALI Bus




DALI wiring diagram

PUSH Dimmer



PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT VOLTAGE
AL24150.SD2	DIMMABLE power supply DALI2 and PUSH Protected pressure terminals, IP20 Vin 220-240Vac Sizes mm 337x30x18H	24Vdc - 150W



DALI Bus



DALI wiring diagram


PUSH Dimmer




PUSH wiring diagram

CODE	DESCRIPTION	CONSTANT CURRENT	CONSTANT VOLTAGE
L1241	Emergency lighting power supply with instant switch on if mains power fails. The device has combined operation for both continuous and emergency lighting. Suitable for power LEDs (max. 4W) or LED modules (12Vdc). Measurements of Power Supply mm 105x46x24H Measurements of Battery mm 90x45x23H	1W 350mA 4h autonomy 2W 350mA 3h autonomy 3W 350mA 2h autonomy	12Vdc - 3.6W 1h autonomy 12Vdc - 1.8W 2h autonomy 12Vdc - 1.2W 3h autonomy

Power supply




Battery





CODE	DESCRIPTION	DIP-SWITCH POSITION A	DIP-SWITCH POSITION B
EL6171	Emergency lighting only power supply with instant switch on if mains power fails. The device only operates continuously when combined with dimmable power controls. DIP-SWITCH adjustable version, for 350mA power LEDs or 12Vdc-24Vdc LED modules. Battery life 1h. Measurements of Power Supply mm 156x52x26H Measurements of Battery mm 135x45x23H	12Vdc - 24W 350mA	24Vdc - 48W 350mA

Power supply



Battery



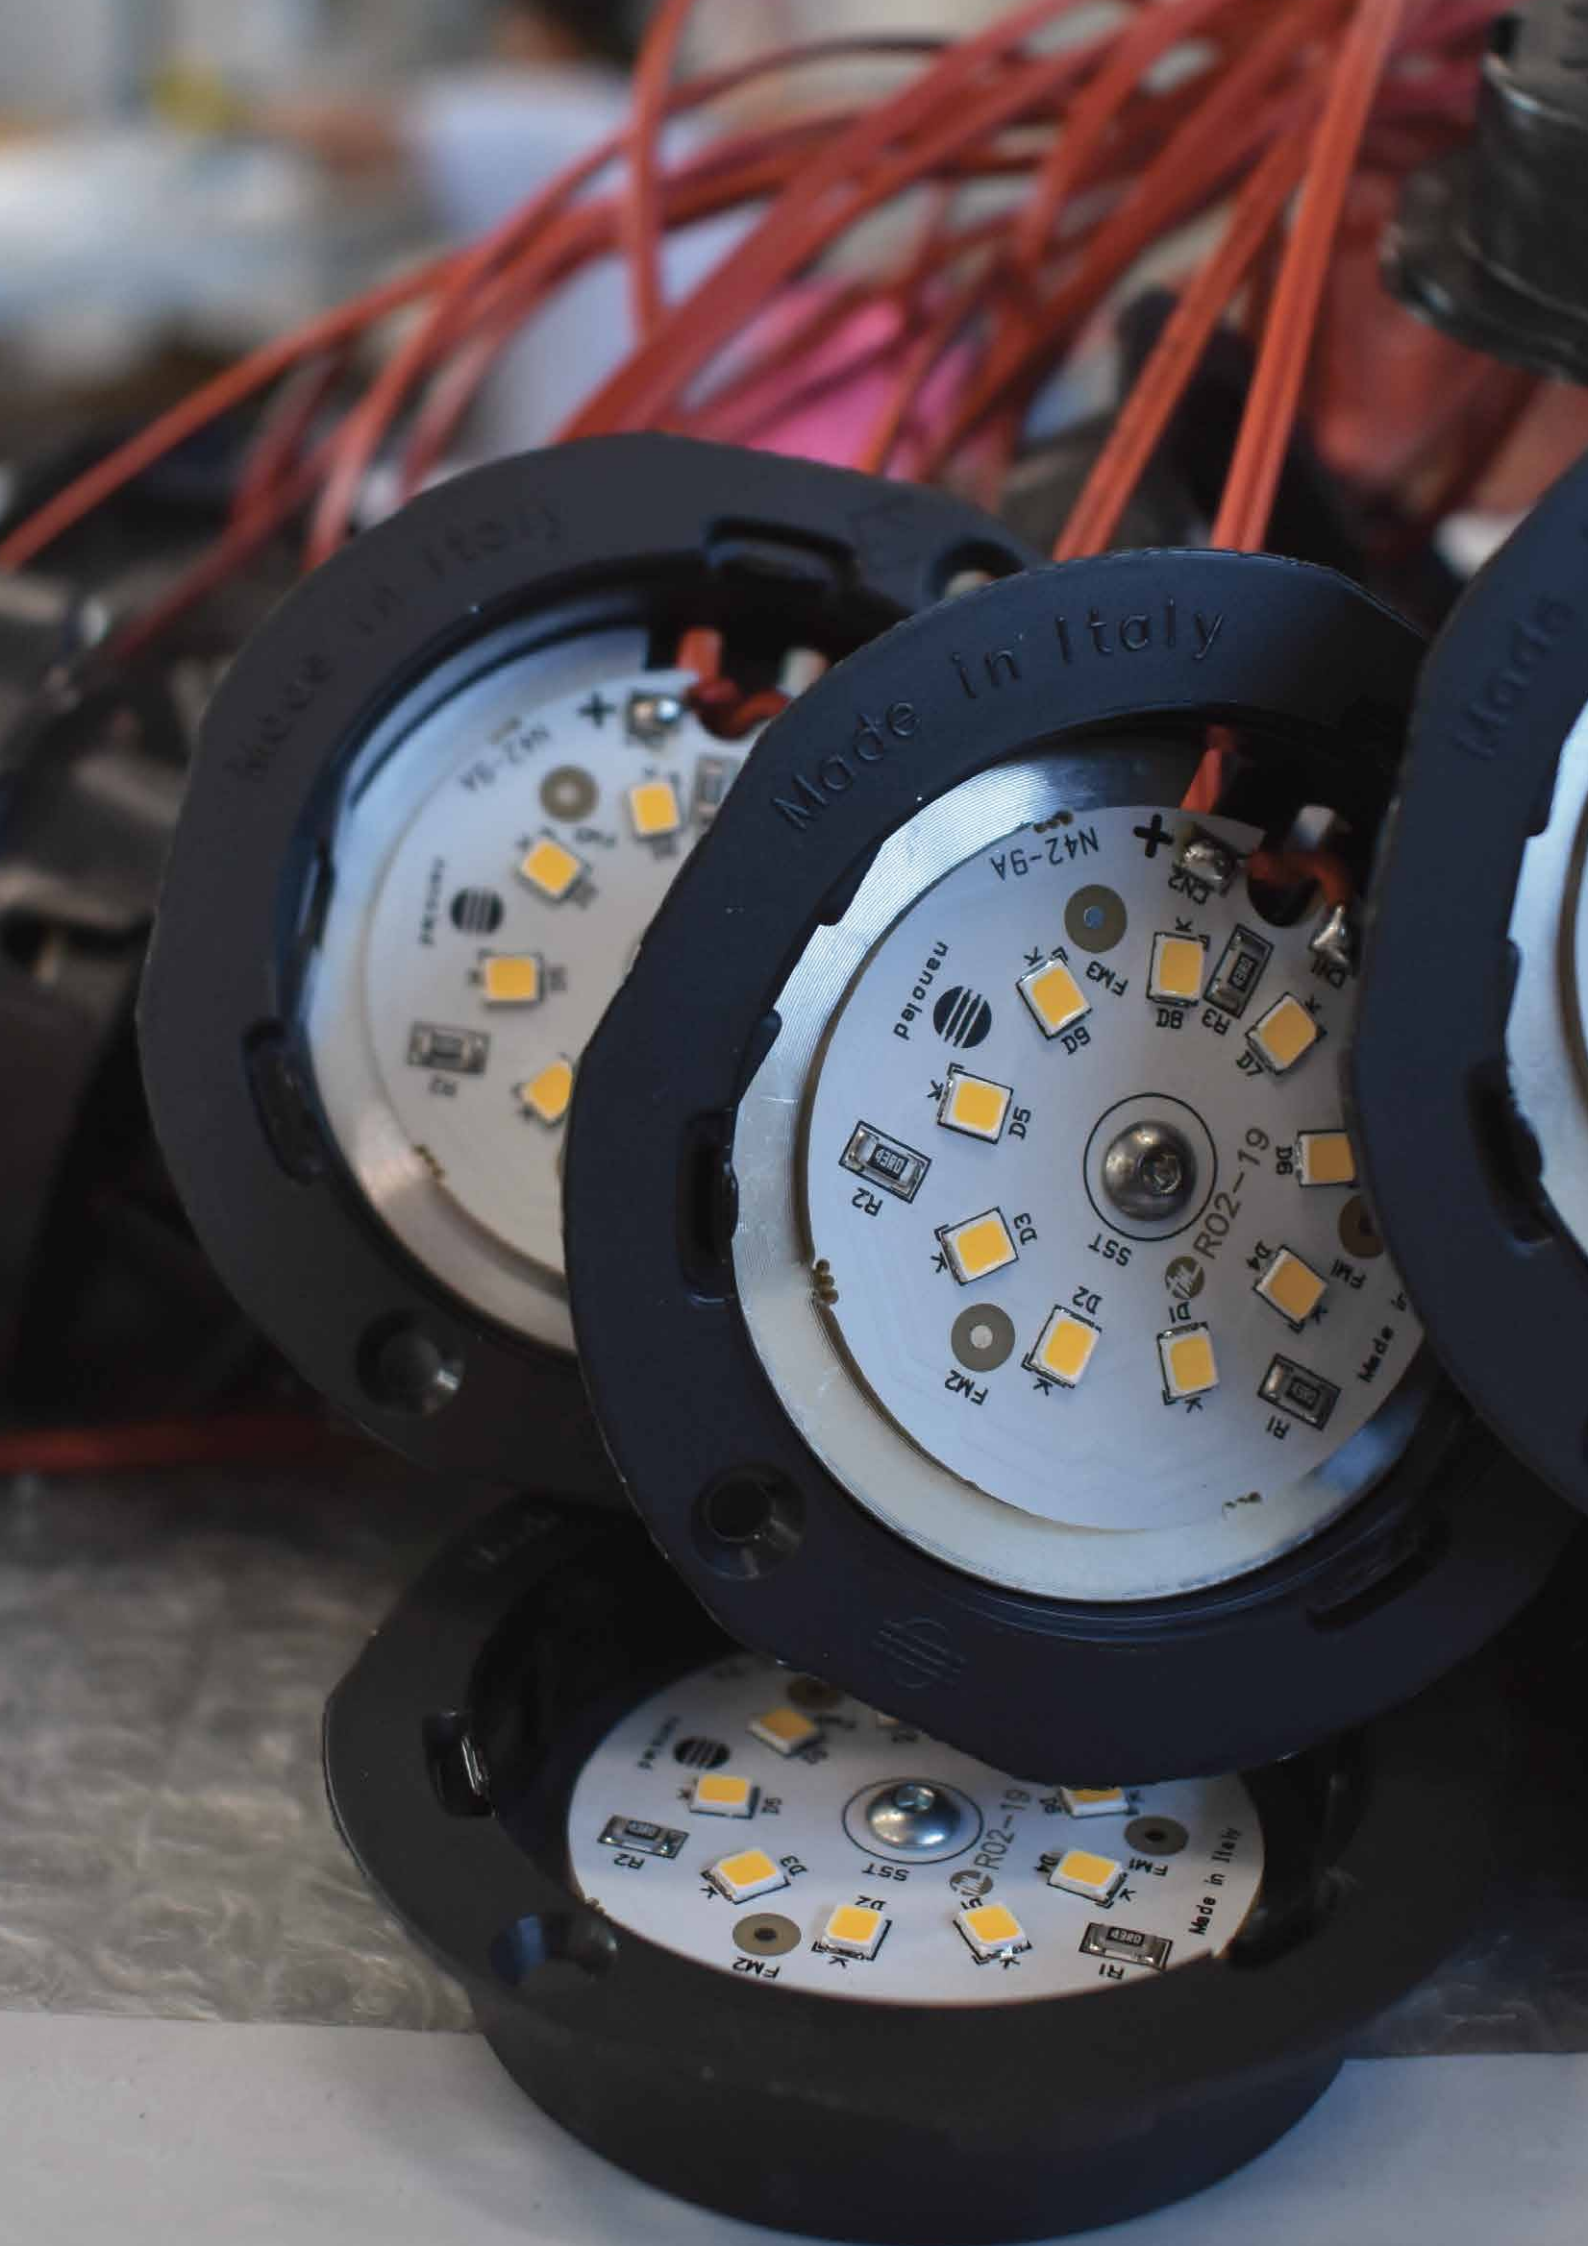
Made in Italy
N42-9A
nanoled
R02-19
SST
Made in Italy


CONNECTION SYSTEMS

SERIES CONNECTION 244
PARALLEL CONNECTION 245
SERIES-PARALLEL CONNECTION 246
RGB CONNECTION 247

SERIES CONNECTION ACCESSORIES


SERIES connection boxes solely for power LEDs, suitable for easy installation and observing correct polarity. Available in three versions with three, four and six inputs. Boxes can also be connected to each other to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNL/03




SERIES connection box solely for three-input power LEDs. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/03J




SERIES connection box solely for three-input power LEDs with connector on cable for connection to another box. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/04




SERIES connection box solely for four-input power LEDs. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/04J




SERIES connection box solely for four-input power LEDs with connector on cable for connection to another box. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/06



SERIES connection box solely for six-input power LEDs. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

CNL/06J




SERIES connection box solely for six-input power LEDs with connector on cable for connection to another box. If not all the Box inputs are used, a CLOSING BRIDGE must be used to close the circuit.

P300




A closing bridge must be used if not all the Box inputs are used by the LEDs.

EXAMPLE OF USE WITH SINGLE BOX

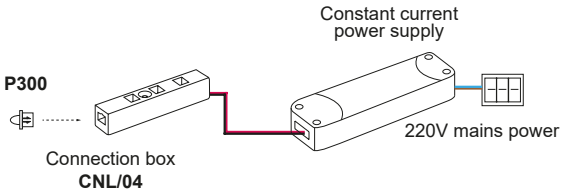

EXAMPLE OF USE WITH MULTIPLE BOXES

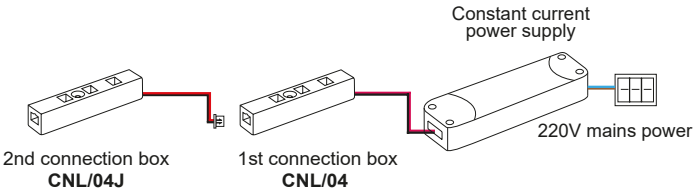

P300
A closing bridge must be used if not all the Box inputs are used by the LEDs.


N.B.:
Boxes can also be connected to each other to expand the system.
When connecting the boxes to each other, it should be noted that one input of the first box will be occupied by the connector of the second box.

EXAMPLE
Using a CNL/04 as the first box and a CNL/04J as the second box will not result in a total of eight inputs, but seven.

PARALLEL CONNECTION ACCESSORIES


PARALLEL connection box solely for ALGOL model Microspots or large sections of monochrome LED strips. The box makes installation easier while observing the correct polarity. Available in a six-input version. Several boxes can be connected to the same power supply to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNP




PARALLEL connection box solely for ALGOL model Microspots or large sections of monochrome LED strips. The circuit CLOSING BRIDGE is not necessary.

EXAMPLE OF USE WITH SINGLE BOX

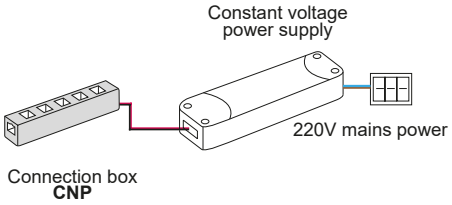


EXAMPLE OF USE WITH MULTIPLE BOXES

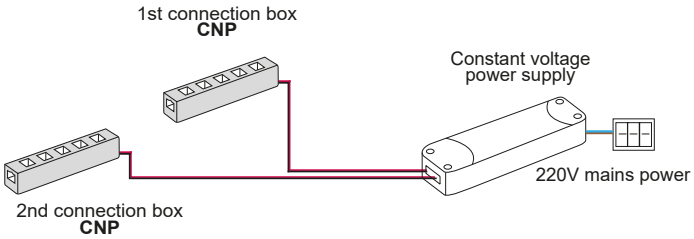

SERIES-PARALLEL CONNECTION ACCESSORIES


SERIES-PARALLEL connection box solely for Microspot models DUST and SKY. The boxes must be used when installing and operating spotlights. Available in a six-input version. A multiplier box can be used to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNTG




Box required for SERIES-PARALLEL connection of DUST and SKY microspots.
Only three or six Microspots can be connected to the box.

CNTG/J




Box required for SERIES-PARALLEL connection of DUST and SKY microspots.
Only three or six Microspots can be connected to the box.
The box is equipped with a multiplier connector.

CNTG/M




Multiplier box for system expansion with Microspot DUST and SKY.
Up to six CNTG/J boxes can be connected to the box.


EXAMPLE OF USE WITH SINGLE BOX

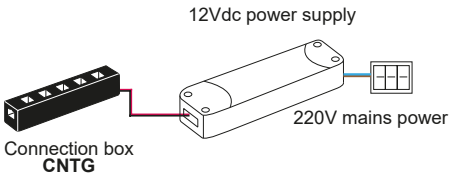

EXAMPLE OF USE WITH MULTIPLE BOXES

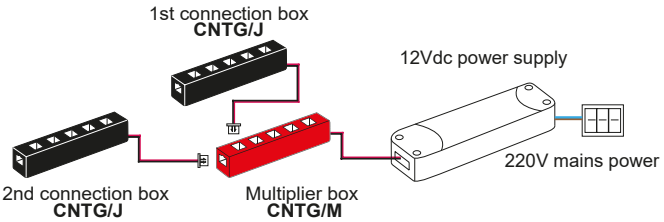


CNTG/18




Box required for SERIES-PARALLEL connection of DUST and SKY microspots.
Only three or multiples of three Microspots can be connected to the box.

CNTG/18J




Box required for SERIES-PARALLEL connection of DUST and SKY microspots.
Only three or multiples of three Microspots can be connected to the box.
The box is equipped with a multiplier connector.

CNTG/M




Multiplier box for system expansion with Microspot DUST and SKY.
Up to six CNTG/18J boxes can be connected to the box.

EXAMPLE OF USE WITH SINGLE BOX

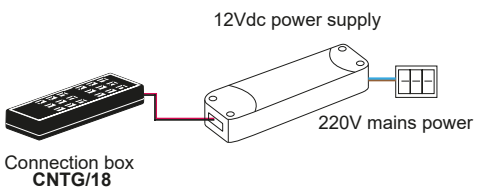


EXAMPLE OF USE WITH MULTIPLE BOXES

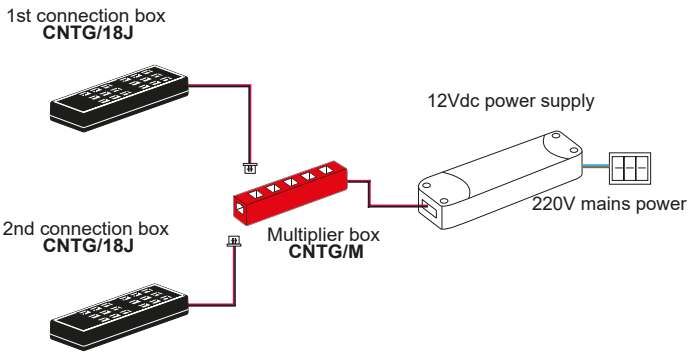

SERIES CONNECTION RGB


Connection box solely for Microspot models SKY RGB, ALGOL RGB and HALLEY RGB. The boxes must be used when installing and operating spotlights. Available in a six-input version. A multiplier box can be used to expand the system. Indoor installation, connection cables 200mm, max. current 2.5A.

CNL/RGB




Mandatory box for connection of the Microspots SKY RGB, ALGOL RGB and HALLEY RGB. One to six microspots can be connected to the same box.

CNL/RGBJ




Mandatory box for connection of the Microspots SKY RGB, ALGOL RGB and HALLEY RGB. One to six microspots can be connected to the same box.
The box is equipped with a multiplier connector.

CNL/RGBM




Multiplier box to be used for system expansion with Microspot DUST and SKY.
Up to six CNL/RGBJ boxes can be connected to this box.

EXAMPLE OF USE WITH SINGLE BOX

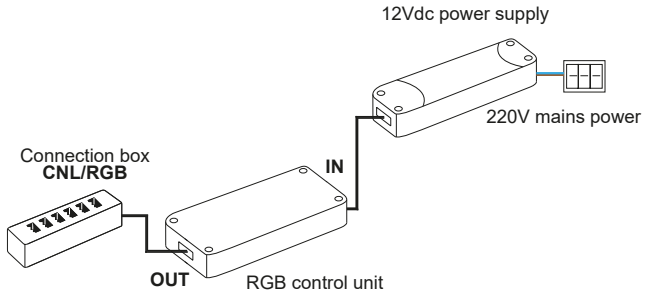

EXAMPLE OF USE WITH MULTIPLE BOXES

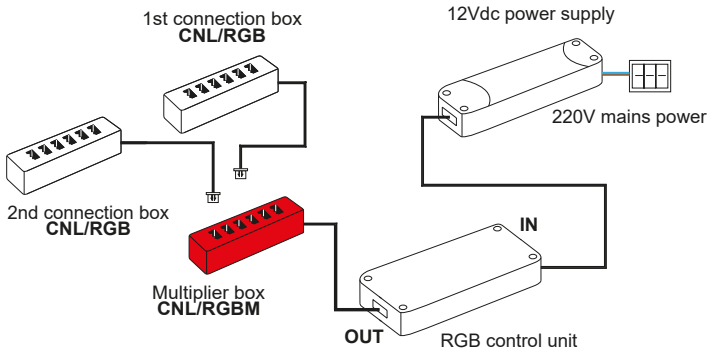




CONTROL SYSTEMS

SK-V1 CONTROL UNIT 250
RF.001 CONTROL UNIT 251
SR-1029 CONTROL UNIT 252
RFL20K CONTROL UNIT 253
SR-1029W CONTROL UNIT 254
1009FA3 CONTROL UNIT 255
DLM1224-1CV CONTROL UNIT 256
MINI-1CV CONTROL UNIT 257
MINI-1CV-DALI CONTROL UNIT 258
MINI-1CV-CASAMBI CONTROL UNIT 259
LINE-5CV CONTROL UNIT 260
DLX1224-4CV-DALI CONTROL UNIT 261
LINE 5CV-CASAMBI CONTROL UNIT 262
DLC1248-1CC350 CONTROL UNIT 263
DLC1248-1CC500 CONTROL UNIT 263
DLX1224-4CC350 CONTROL UNIT 264
DLX1224-4CC500 CONTROL UNIT 264
VOLUMETRIC SENSOR 265
INFRARED SENSOR 265
TOUCH SENSOR 265
TOUCH MINI SENSOR 266
TOUCH DIMMER SENSOR 266
MINI MOTION DETECTOR SENSOR 267
TOUCH SENSOR SWITCH SENSOR 267
IR SENSOR SWITCH SENSOR 267


SK-V1 control unit

Professional multifunctional control unit with PUSH or radio remote control for monochrome strips. Active memory function. A remote control or button can be combined with several control units to expand the system


Power supply voltage: Vin = Vout - 5..36Vdc
Output current: 1x8A - 5...36Vdc
Power rating: 40W@5Vdc - 96W@12Vdc - 192W@24Vdc - 288W@36Vdc



SK-V1

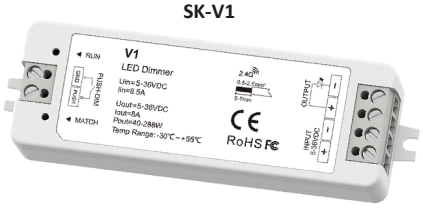

SK-R11




Radio remote control for monochrome LEDs
Radio remote control with magnetic or screw base for switching on, adjusting and switching off.

SK-R1-1W




Radio remote control for dynamic white LED
Round white Touch radio remote control with magnetic base or screw base for switching on, adjusting and switching off.

EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH A CONTROL UNIT

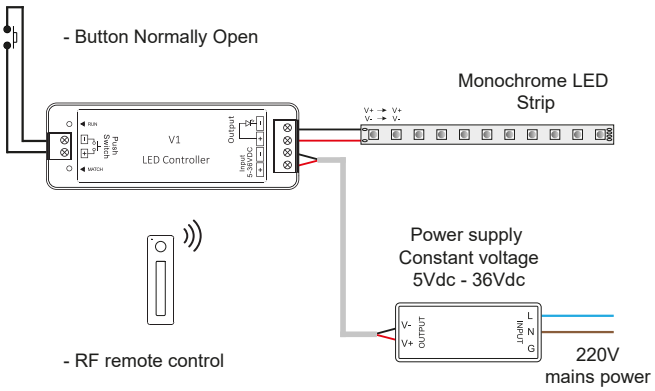


EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH TWO CONTROL UNITS

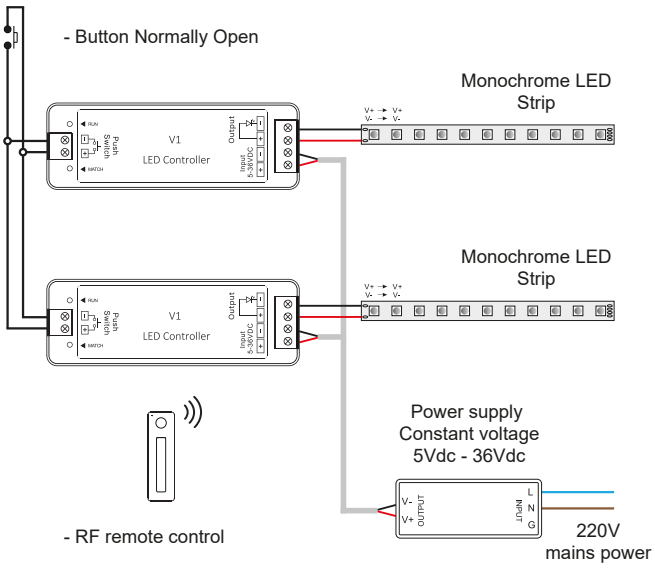

RF.001 control unit

One-channel control unit for 12Vdc or 24Vdc constant voltage control of monochrome LED strips, radio remote control included. On/off, dimmer and active memory function. Possibility of expanding the system with up to nine RF.AMF amplifiers. Installation in unshielded indoor locations.


Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 8A - 12/24Vdc
Power rating: 96W@12Vdc - 192W@24Vdc

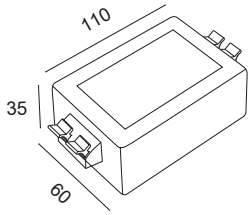


RF.001



EXAMPLE OF MONOCHROME LED STRIP CONTROL

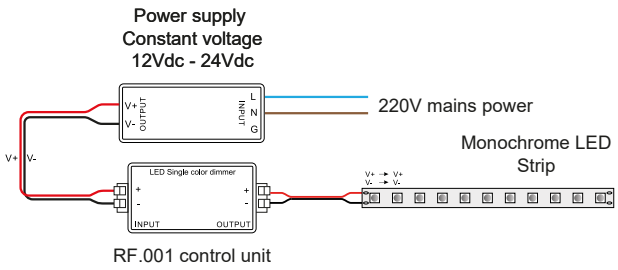


EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH RF.AMF AMPLIFIER

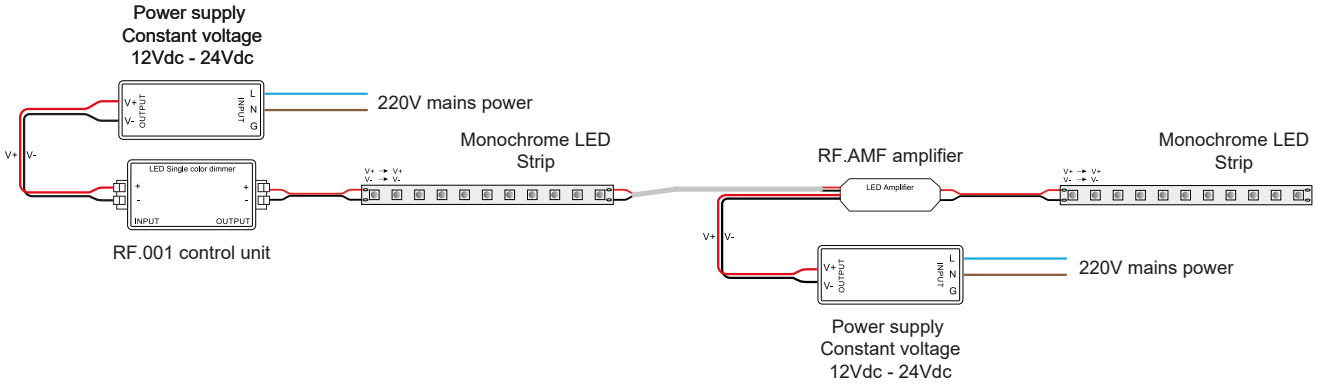

SR-1029 control unit

Professional three-channel control unit for constant voltage 12Vdc or 24Vdc control of monochrome, dynamic white or RGB LED strips. Simple, intuitive pairing system between control units and radio remote controls. A remote control can be combined with several control units to expand the system Installation in unshielded indoor locations.
Active memory function.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 3x5A - 12/24Vdc
Power rating: 3x60W@12Vdc - 3x120W@24Vdc

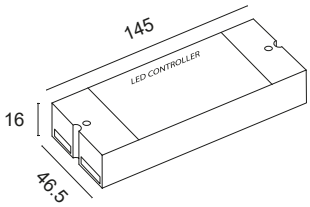

SR-1029



SR-2839



Radio remote control for monochrome LEDs
Quick, precise light intensity selection and control via the round mini-touch panel.
Two pre-set scenes can be stored.
Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%.
Possibility of coupling the same radio control unit to several control units.
Maximum operating distance 20 metres.

SR-2839CCT




Radio remote control for dynamic white LED
Quick, precise colour temperature selectio and adjustment via the mini round touch panel.
Light intensity adjustment via two buttons.
Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%.
Two pre-set scenes can be stored.
Possibility of coupling the same radio control unit to several control units.
Maximum operating distance 20 metres.

SR-2839RGB




Radio remote control for RGB LEDs
Quick, precise colour selection and adjustment via the mini round touch panel.
Adjustment of light intensity of the chosen colour via a single button.
Adjustment of light intensity of the primary colours via three buttons.
Preset scene selection via single button.
Possibility of adjusting the speed of scenes.
Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.


EXAMPLE OF MONOCHROME LED STRIP CONTROL

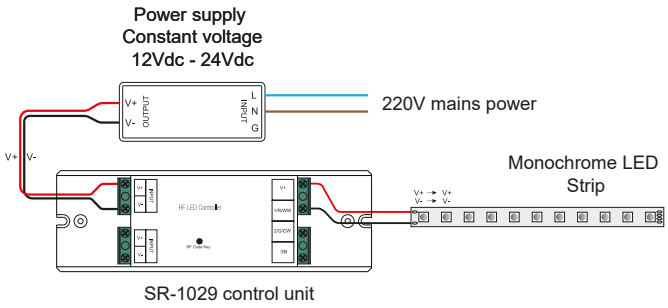

EXAMPLE OF DYNAMIC WHITE LED STRIP CONTROL

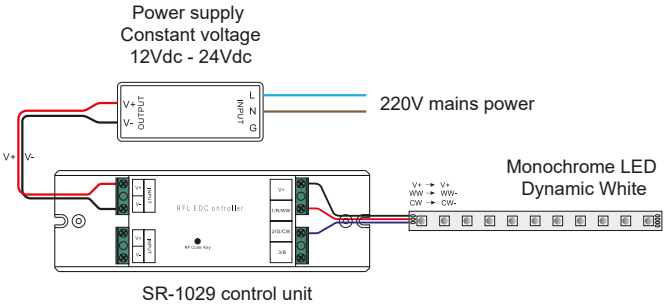


EXAMPLE OF RGB LED STRIP CONTROL

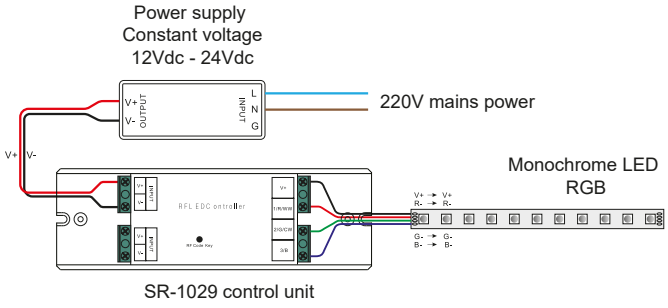

RFL20K control unit

Three-channel control unit for 12Vdc or 24Vdc constant voltage control of RGB LED strips, radio remote control included. On/off function, dimmer, choice of colours, choice of scene speed and active memory. Possibility of expanding the system with up to nine RGB.AMF amplifiers. Installation in unshielded indoor locations.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 18A - 12/24Vdc
Power rating: 216W@12Vdc - 432W@24Vdc




RFL20K






EXAMPLE OF RGB LED STRIP CONTROL

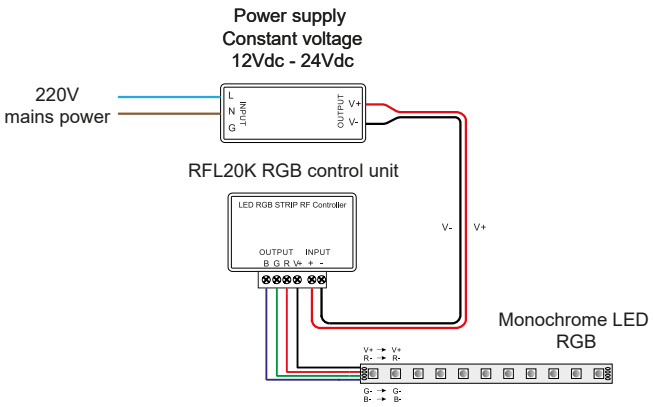


EXAMPLE OF RGB LED STRIP CONTROL WITH AMPLIFIER

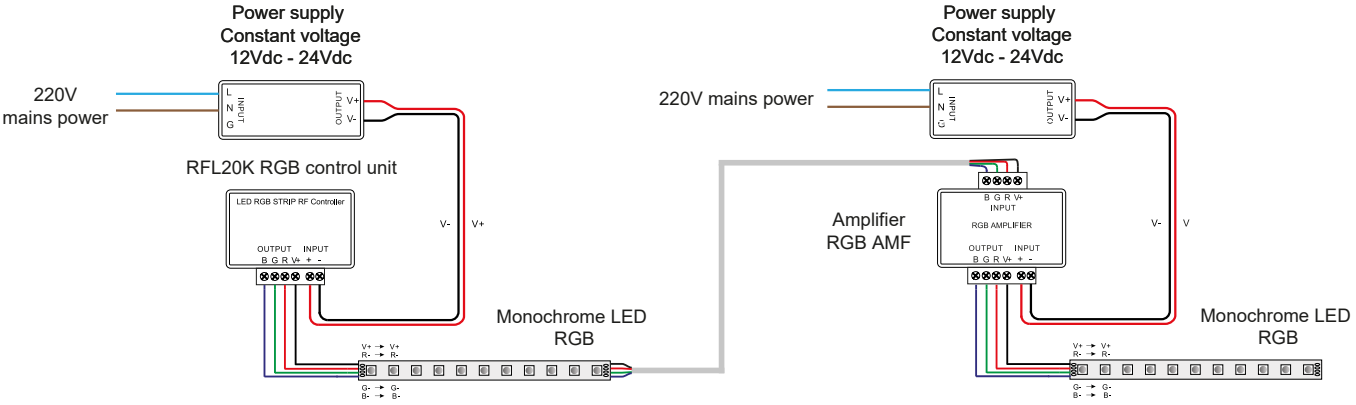

SR-1029W control unit

Professional four-channel control unit for 24Vdc constant voltage control of RGBW LED strips. Simple, intuitive pairing system between control units and radio remote controls. A remote control can be combined with several control units to expand the system Installation in unshielded indoor locations. Active memory function.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 3x5A - 12/24Vdc
Power rating: 3x60W@12Vdc - 3x120W@24Vdc

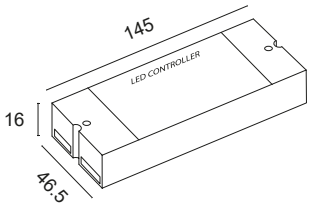

SR-1029W




SR-2839RGBW **Radio remote control for RGBW LEDs**



Quick, precise colour selection and adjustment via the mini round touch panel.
Adjustment of light intensity of the chosen colour via a single button.
Adjustment of light intensity of the primary colours via three buttons.
Two pre-set scenes can be stored.
Possibility of adjusting the speed of scenes.
Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.


EXAMPLE OF RGBW LED STRIP CONTROL

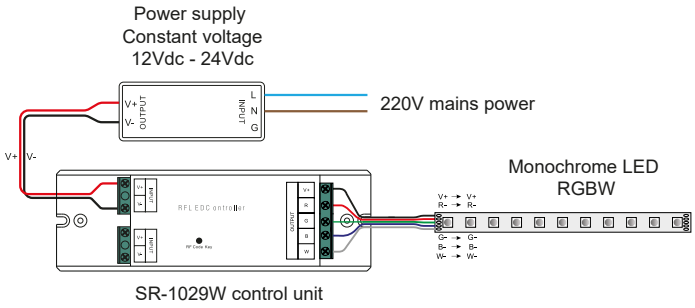

SR-1009FA3 control unit

Professional four-channel control unit for 350mA constant current control of monochrome, dynamic white or RGB power LEDs. Simple, intuitive pairing system between control units and radio remote controls. A remote control can be combined with several control units to expand the system Installation in unshielded indoor locations. Active memory function.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 4x350mA - 12/24Vdc
Power rating: 4x4.2W@12Vdc - 4x8.4W@24Vdc

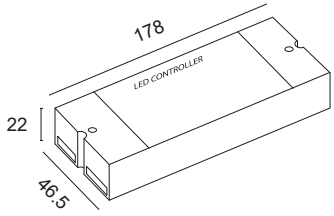

SR-1009FA3



SR-2819SDIM **Radio remote control for monochrome LEDs**



Quick, precise light intensity selection and control via the round mini-touch panel.
Three pre-set scenes can be stored.
Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%.
Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.

SR-2819SCCT **Radio remote control for dynamic white LED**




Quick, precise colour temperature selection and adjustment via the mini round touch panel.
Light intensity adjustment via two buttons.
Control of light intensity also via four preset buttons: 25%, 50%, 75% or 100%.
Three pre-set scenes can be stored.
Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.

SR-2819S **Radio remote control for RGB LEDs**




Quick, precise colour selection and adjustment via the mini round touch panel.
Adjustment of light intensity of the chosen colour via a single button.
Adjustment of light intensity of the primary colours via three buttons.
Preset scene selection via single button.
Possibility of adjusting the speed of scenes.
Possibility of coupling the same radio remote control unit to several control units.
Maximum operating distance 20 metres.


EXAMPLE OF MONOCHROME LED SPOT CONTROL

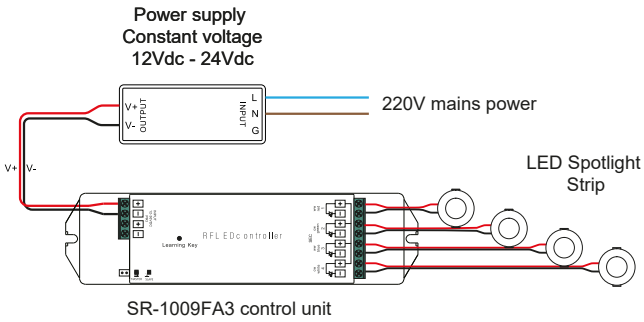

EXAMPLE OF DYNAMIC WHITE LED SPOTLIGHTS

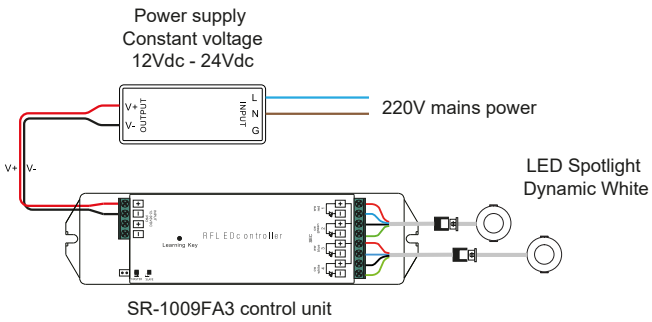


EXAMPLE OF RGB LED SPOTLIGHT CONTROL

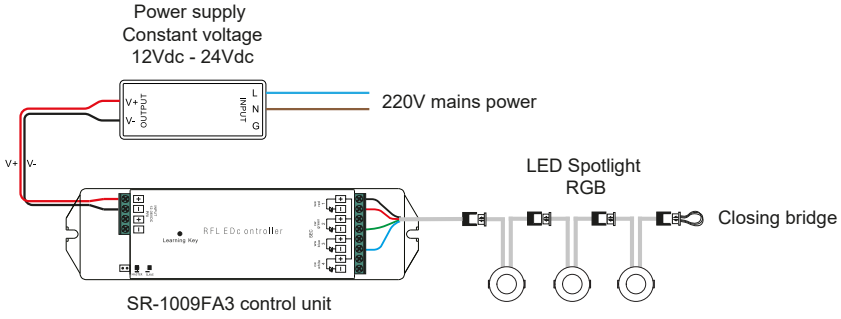

DLM1224-1CV control unit

One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. Control via a normally open button, 0-10V / 1-10V signal or potentiometer. The system can be expanded with the use of additional control units. Can be installed in unshielded indoor environments.
Active memory function.


Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 10A - 12/24Vdc
Power rating: 120W@12Vdc - 240W@24Vdc

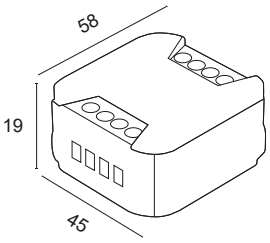


DLM1224-1CV



EXAMPLE OF MONOCHROME LED STRIPS CONTROL

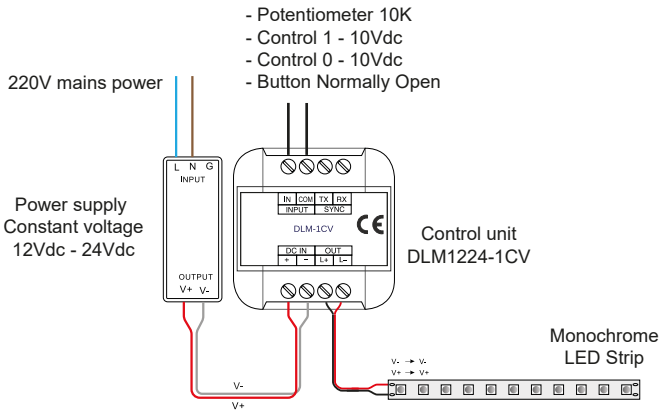


EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH AMPLIFIER

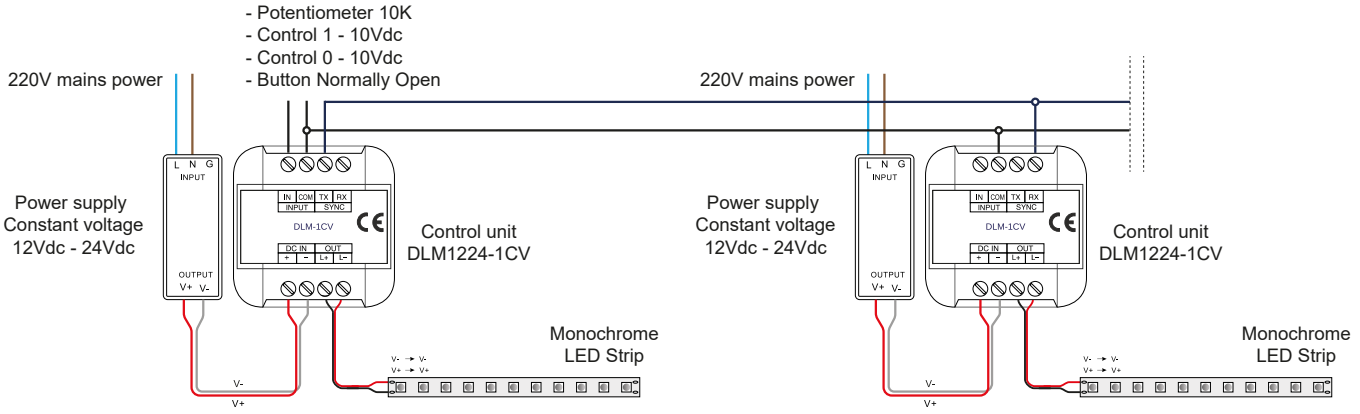

MINI-1CV control unit

One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. Control via a normally open button, 0-10V / 1-10V signal or potentiometer. The system can be expanded with the use of additional control units. Can be installed in unshielded indoor environments.
Active memory function. Using the LightApp mobile application, it is possible to configure the dimming frequency, dimming curve, brightness level and dynamic scenarios or animations.


Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 12A - 12/24Vdc
Power rating: 144W@12Vdc - 288W@24Vdc




MINI-1CV



EXAMPLE OF MONOCHROME LED STRIPS CONTROL

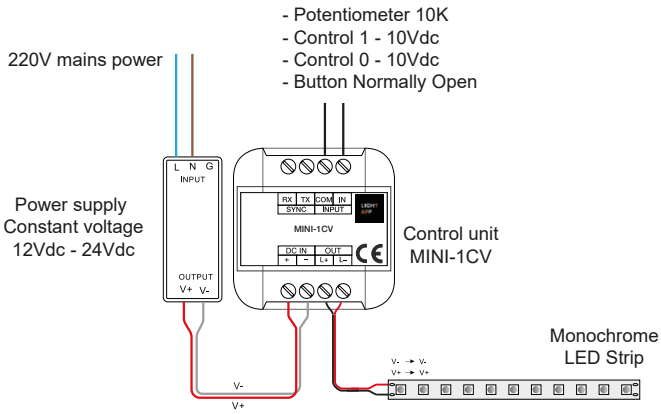


EXAMPLE OF MONOCHROME LED STRIP CONTROL WITH AMPLIFIER

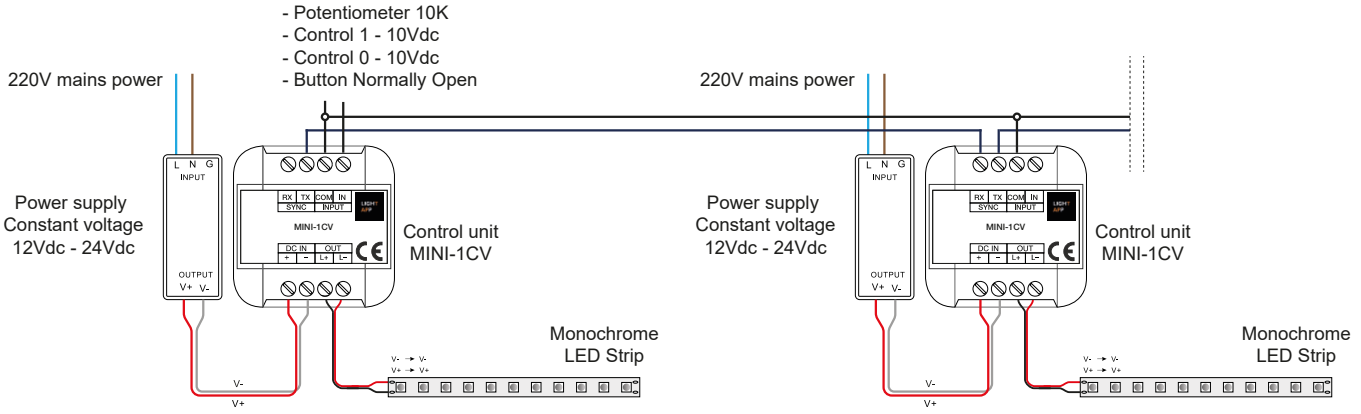

MINI-1CV-DALI control unit

One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. DALI control system via a normally open button, 0-10V / 1-10V signal or potentiometer. Can be installed in unshielded indoor environments. Active memory function. Using the LightApp mobile application, it is possible to configure the dimming frequency, dimming curve, brightness level and dynamic scenarios or animations.


Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 10A - 12/24Vdc
Power rating: 120W@12Vdc - 240W@24Vdc

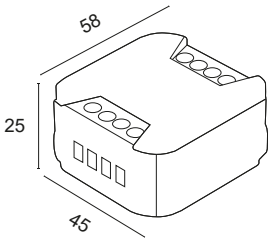

MINI-1CV-DALI




EXAMPLE OF MONOCHROME LED STRIPS CONTROL

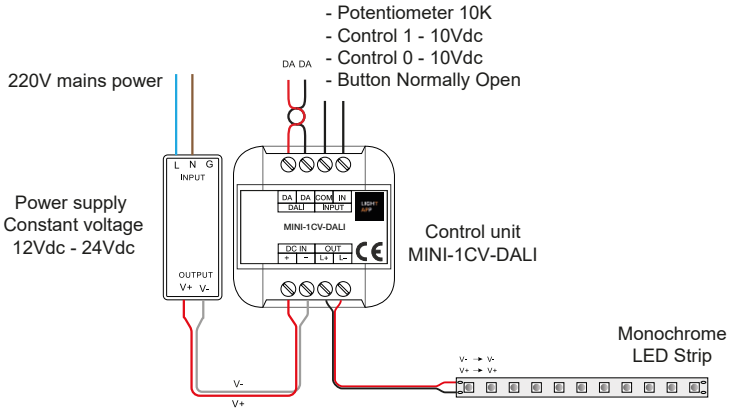

MINI-1CV-CASAMBI control unit

One-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome LEDs. CASAMBI control system or via a normally open button. Can be installed in unshielded indoor environments. Active memory function. Using the CASAMBI application, it is possible to make simple brightness adjustments right up to more complex lighting control systems, thanks to the creation of multiple scenes, animations, timers, daylight controls, etc.


Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 12A - 12/24Vdc
Power rating: 144W@12Vdc - 288W@24Vdc

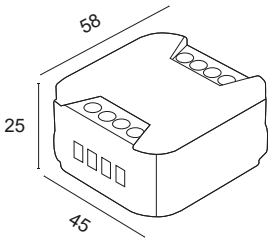

MINI-1CV-CASAMBI




EXAMPLE OF MONOCHROME LED STRIPS CONTROL

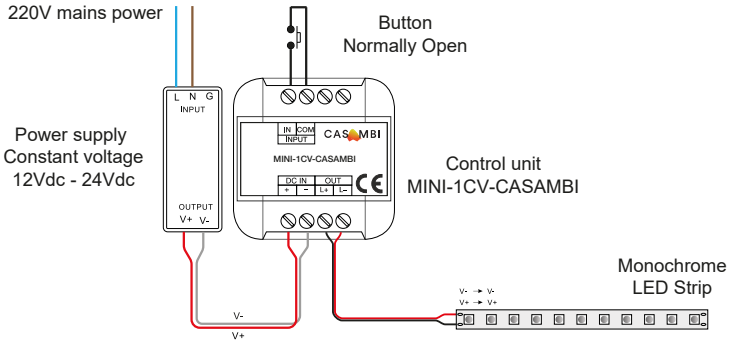

LINE-5CV control unit

Five-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome, dynamic white, RGB or RGBW LEDs. Control system via two normally open buttons. Can be installed in unshielded indoor environments. The system can be expanded with the use of the DLA-1224-4CV amplifier.
Active memory function.

Power supply voltage: Vin = Vout - 12/24/48Vdc
Output current: 12A - 12/24/48Vdc
Power rating: 144W@12Vdc - 288W@24Vdc - 576W@48Vdc

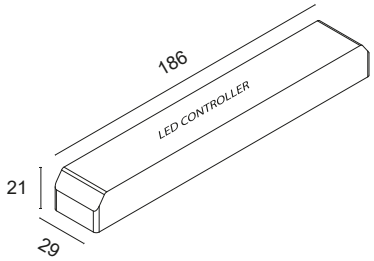


LINE-5CV



DLA1224-4CV




EXAMPLE OF RGBW LED STRIP CONTROL

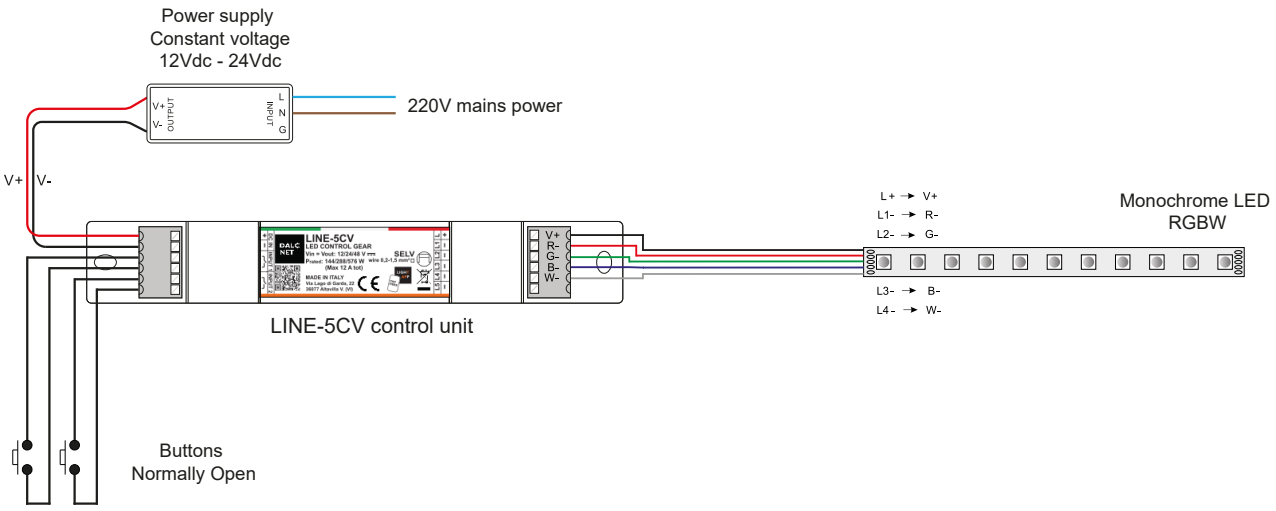

DLX1224-4CV-DALI control unit

Four-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome, dynamic white, RGB or RGBW LEDs. DALI control system or via DIP-SWITCH. Can be installed in unshielded indoor environments.
The system can be expanded with the use of the DLA-1224-4CV amplifier. Active memory function.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 10A - 12/24Vdc
Power rating: 120W@12Vdc - 240W@24Vdc




DLX1224-4CV-DALI




DLA1224-4CV



EXAMPLE OF RGBW LED STRIP CONTROL

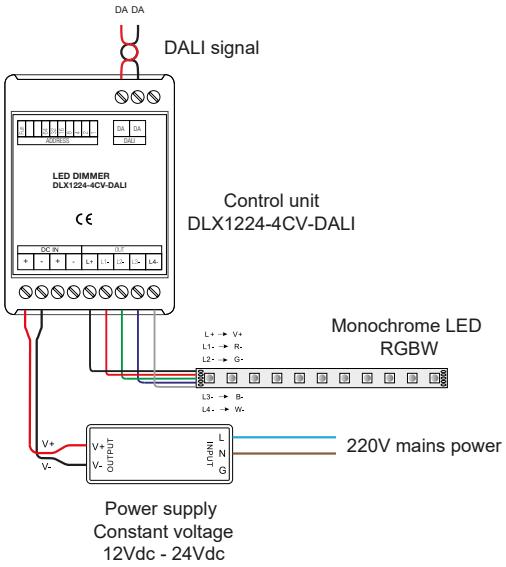


EXAMPLE OF RGBW LED STRIP CONTROL WITH AMPLIFIER

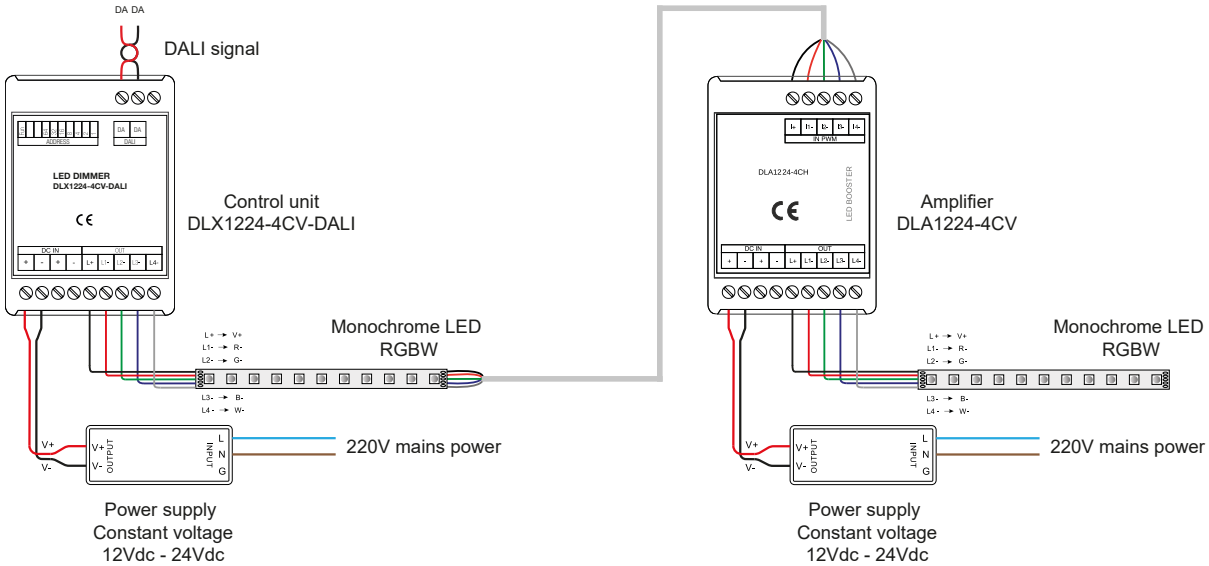

LINE 5CV-CASAMBI CONTROL UNIT

Five-channel control unit with ON/OFF and DIMMER function in 12Vdc or 24Vdc constant voltage for monochrome, dynamic white, RGB or RGBW LEDs. Control system via two normally open buttons. Can be installed in unshielded indoor environments. The system can be expanded with the use of the DLA-1224-4CV amplifier. Active memory function. Using the CASAMBI application, it is possible to make simple brightness adjustments right up to more complex lighting control systems, thanks to the creation of multiple scenes, animations, timers, daylight controls, etc.

Power supply voltage: Vin = Vout - 12/24/48Vdc
Output current: 12A - 12/24/48Vdc
Power rating: 144W@12Vdc - 288W@24Vdc - 576W@48Vdc

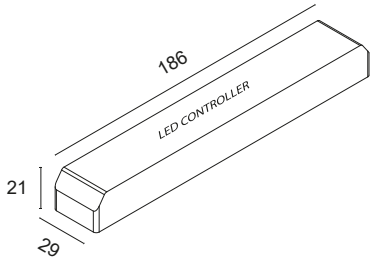


LINE-5CV-CASAMBI



DLA1224-4CV




EXAMPLE OF RGBW LED STRIP CONTROL

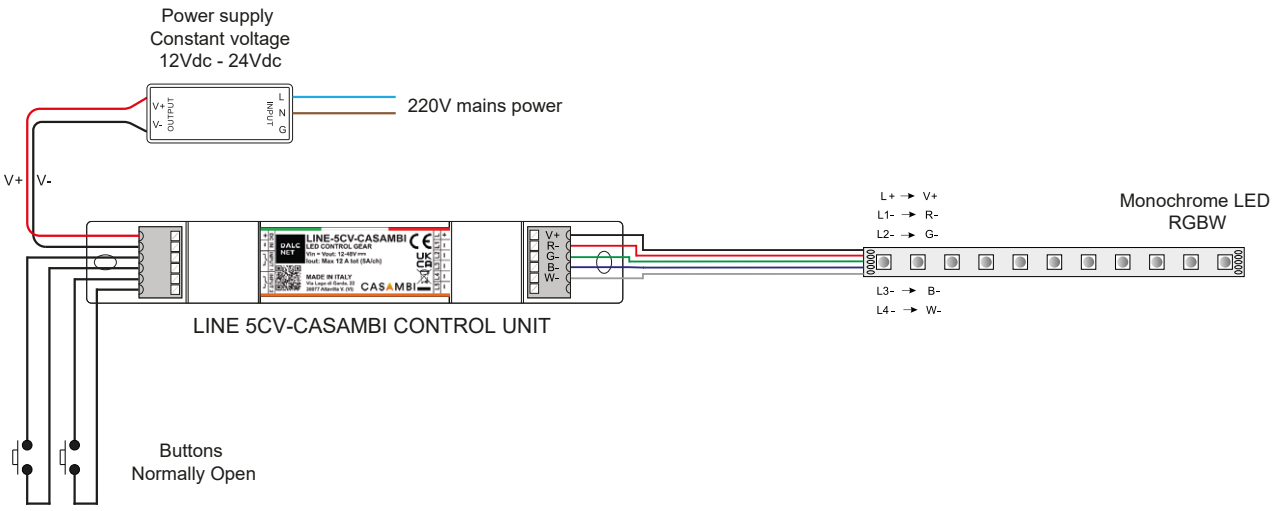

DLC1248-1CC350 control unit
DLC1248-1CC500 control unit

One-channel control unit with ON/OFF and DIMMER function for 350mA or 500mA constant voltage monochrome LEDs. control system via a normally open button. Possibility to expand the system with the use of DLA1248-1CC350 or DLA1248-1CC500 amplifiers. Can be installed in unshielded indoor environments.
Memory function possible.

Power supply voltage: Vin = 24Vdc
Output current: 350mA - 500mA
Power rating: 8.4W@350mA Total - 12W@500mA Total




DLC1248-1CC350
DLC1248-1CC500




DLA1248-1CC350
DLA1248-1CC500



EXAMPLE OF MONOCHROME LED SPOTLIGHT CONTROL

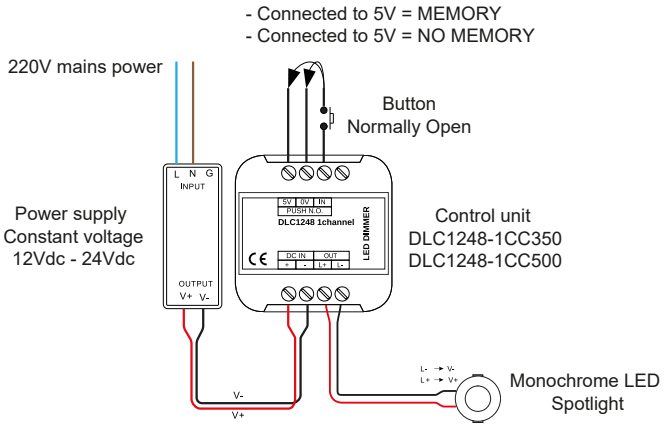


EXAMPLE OF MONOCHROME LED SPOTLIGHT CONTROL WITH AMPLIFIER

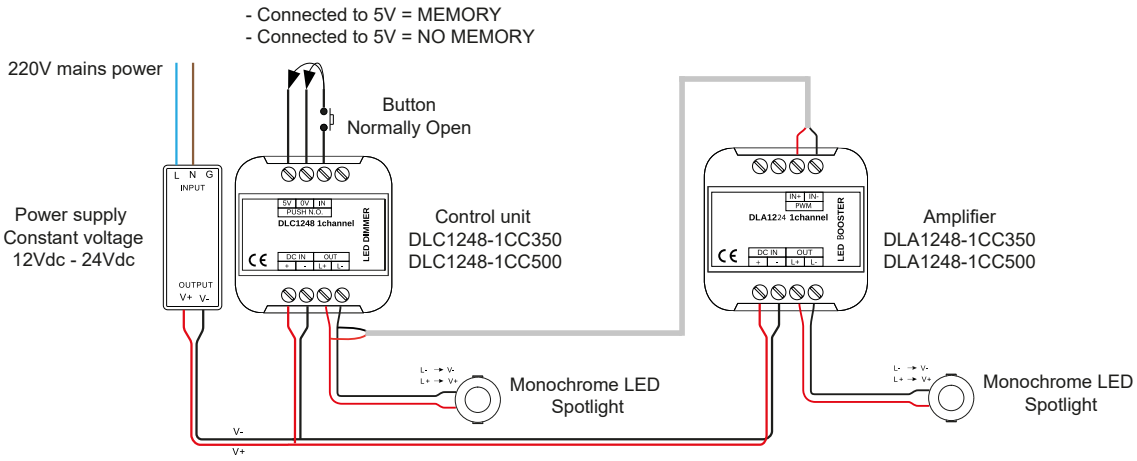

DLX1224-4CC350 control unit
DLX1224-4CC500 control unit

Four-channel control unit with ON/OFF and DIMMER function for 350mA or 500mA constant voltage RGB LEDs. Control system via two normally open buttons. Possibility to expand the system with the use of DLA1224-4CC350 or DLA1224-4CC500 amplifiers. Can be installed in unshielded indoor environments. Memory function possible.

Power supply voltage: Vin = 24Vdc
Output current: 350mA - 500mA
Power rating: 33.6W@350mA Total - 48W@500mA Total




DLX1224-4CC350
DLX1224-4CC500




DLA1224-4CC350
DLA1224-4CC500



EXAMPLE OF RGB LED SPOTLIGHT CONTROL

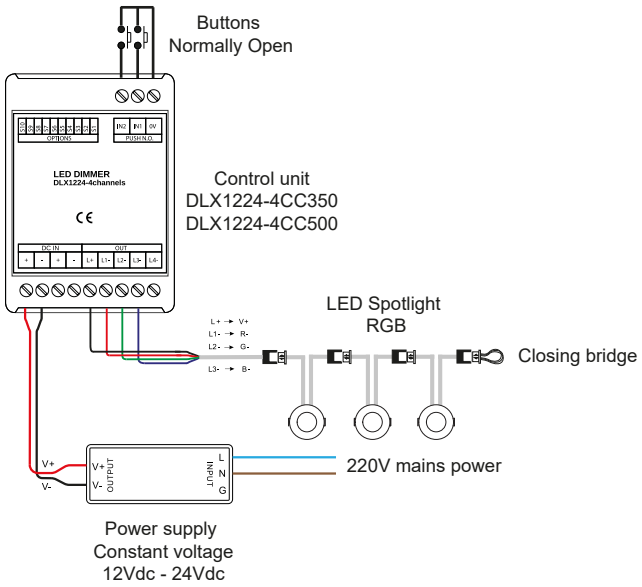

EXAMPLE OF RGB LED SPOTLIGHT CONTROL WITH AMPLIFIER

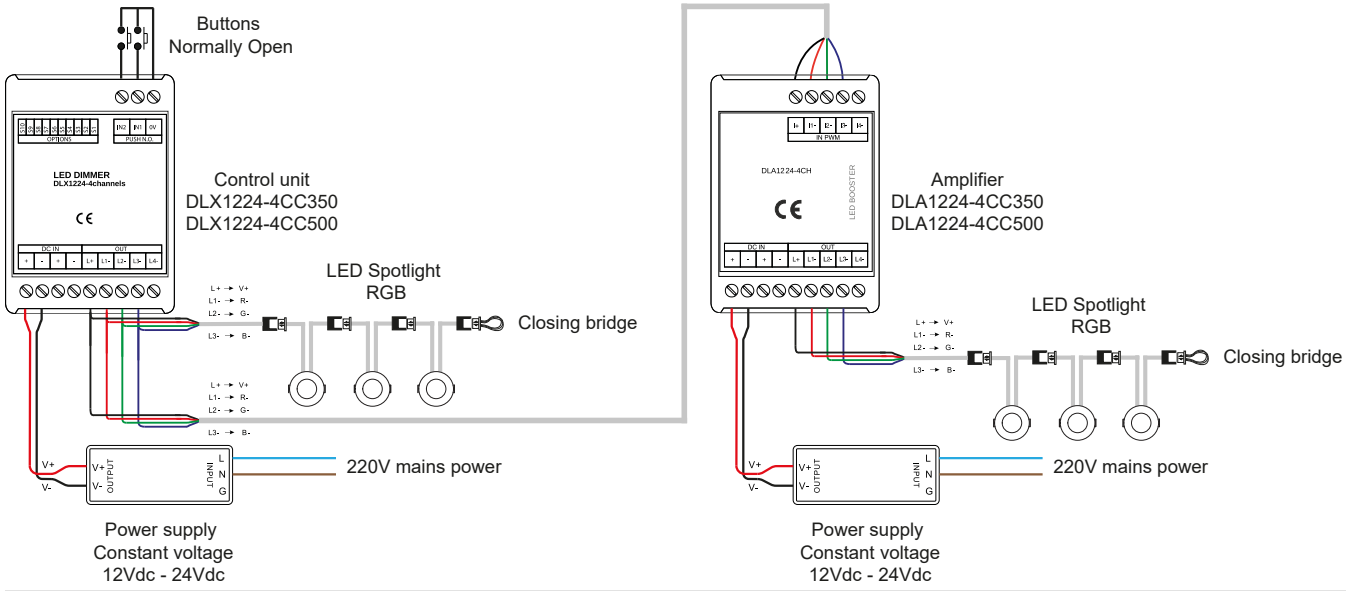


VOLUMETRIC SENSOR


Electronic device for switching the constant voltage LED on and off. Up to a maximum distance of 3m and at an angle of 120°, the SENSOR system detects a presence through movement and switches on the LED; if there is no movement, the system will switch off the LED after approximately 30 seconds. Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 4A - 12/24Vdc
Power rating: 48W@12Vdc - 96W@24Vdc


TC19.



TC19.A



TC19.B






INFRARED SENSOR


Electronic device for switching the constant voltage LED on and off. The IR system will switch the LED on or off with hand movement up to a maximum distance of 10cm. Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 4A - 12/24Vdc
Power rating: 48W@12Vdc - 96W@24Vdc


TC14.



TC14.A



TC14.B

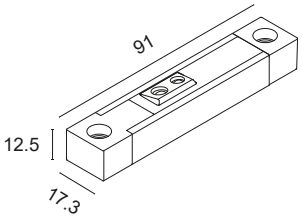




TOUCH SENSOR


Electronic device for switching the constant voltage LED on and off. The TOUCH system will switch the LED on or off with a light touch of the hand Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 4A - 12/24Vdc
Power rating: 48W@12Vdc - 96W@24Vdc


TC02.




TC02.A



TC02.B

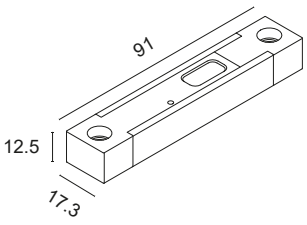

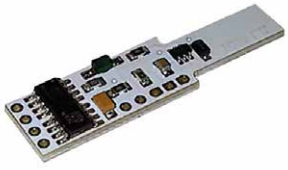


TOUCH MINI SENSOR

Electronic device for switching the constant voltage LED on and off. The TOUCH system will switch the LED on or off with a light touch of the hand. Supplied only pcb tested and wired.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 3A - 12/24Vdc
Power rating: 48W@12Vdc - 96W@24Vdc

TC22.






TOUCH DIMMER SENSOR


Electronic device for adjusting and switching the constant voltage LED on and off. The TOUCH system switches the LED on or off with a light touch of the hand Lightly pressing the DIMMER system will increase or decrease the light intensity. Supplied tested and wired in three solutions: pcb only, pcb mounted on flush mount, pcb mounted on ceiling mount.

Power supply voltage: Vin = Vout - 12/24Vdc
Output current: 4A - 12/24Vdc
Power rating: 48W@12Vdc - 96W@24Vdc


TC20.



TC20.A



TC20.B

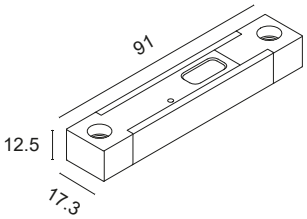





MINI MOTION DETECTOR

Electronic device for switching on and off via the volumetric sensor. The controller turns on the switch when body movement is detected within its range. The switch switches off after the time set in the controller's timer has elapsed. Set the desired timing on the potentiometer. The switch-on time can be set from 10sec. to 3 minutes.

Power supply voltage: Vin = Vout - 100/240Vac
Power rating: Max 250W

90220080

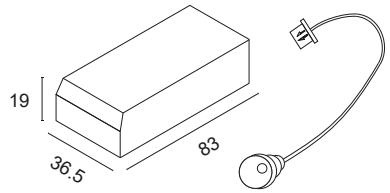

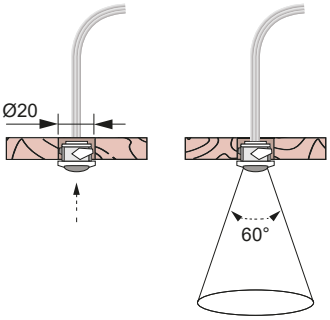





TOUCH SENSOR SWITCH


Electronic device for switching on and off via the TOUCH system. The device turns by lightly touching the sensitive surface connected to the controller's touch sensor. The device's sensitivity is preset to a mid-range; it can be adjusted by turning the potentiometer on the side of the device.


Power supply voltage: Vin = Vout - 220/240Vac
Power rating: Max 500W

90220212

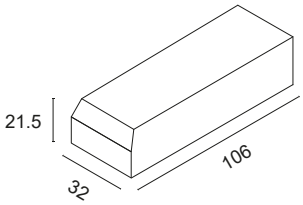











IR SENSOR SWITCH

Electronic device for switching on and off via the INFRARED system. The sensor reacts to approaching objects or hands. The IR sensor controller switches on when it detects a body in its range and switches off when a body is detected again.

Power supply voltage: Vin = Vout - 100/240Vac
Power rating: Max 250W

90220238

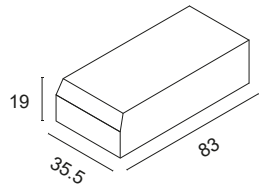

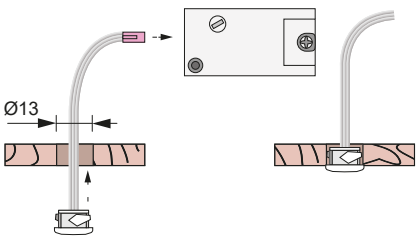






INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK 270
ACSO AND ACRUX SERIES FORMWORK 270
ACSO AND ACRUX SERIES RING 270
DEHO AND DARDO FORMWORK 271
DEHO AND DARDO SERIES RING 271
PAD FORMWORK 271
REMOVE PLUS FORMWORK 272
REMOVE MINUS FORMWORK 272
DUVAR BASE AND STAKE 272


HOLLY, HALISSA AND MEMO FORMWORK

Thermoplastic formwork for HOLLY, HALISSA and MEMO series models for use during installation.
Can be installed in brick walls or floors. Necessary for correct installation.


548/20








Position the formwork flush with the wall or floor.



Fix the formwork with glue or putty and level it flush with the wall or floor. Prevent foreign bodies from entering the formwork.





Connect the electricals as stipulated in the product sheet and check it works correctly. Insert the product into the formwork using light pressure.


ACSO AND ACRUX SERIES FORMWORK

Thermoplastic formwork for ACSO and ACRUX series models for use during installation. Can be installed in brick walls or floors.
Necessary for correct installation.

548/80

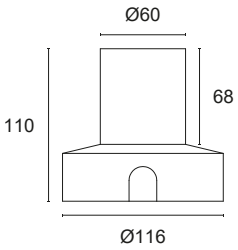

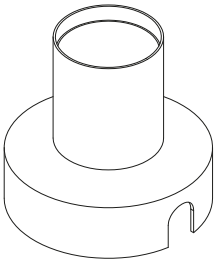




Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.



Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.





After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.


ACSO AND ACRUX SERIES RING

Aluminium ring for ACSO and ACRUX series models for use during flush fitting in plasterboard.


TES0065








Place the ring in the spotlight.



Secure the ring with the supplied grub screws.





Drill the plasterboard to the indicated size and insert the spotlight into the hole.


DEHO AND DARDO FORMWORK

Thermoplastic formwork for DEHO and DARDO series models for use during installation.
Can be installed in brick walls or floors. Necessary for correct installation.


548/40

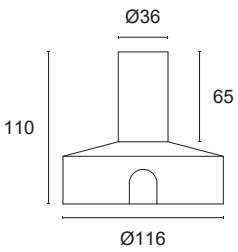

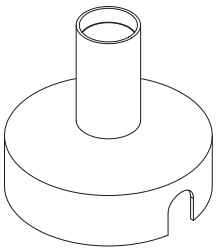




Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.



Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.




After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.


DEHO AND DARDO SERIES RING

Aluminium ring for DEHO and DARDO series models for use during flush fitting in plasterboard.


TNI0076








Place the ring in the spotlight.



Secure the ring with the supplied grub screws.





Drill the plasterboard to the indicated size and insert the spotlight into the hole.


PAD FORMWORK

Metal formwork for the PAD model for use during installation. Can be wall mounted on stone, brick or plasterboard.
Necessary for correct installation.


548/2562

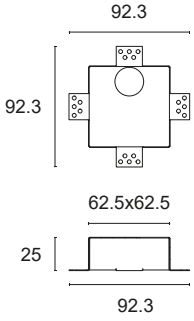

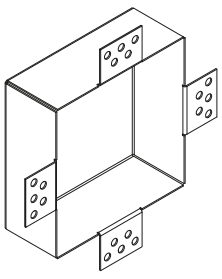




Insert the housing for the formwork and fix it with glue, putty or screws.



Finish off the edges of the formwork and prevent foreign bodies from entering the formwork. Route the electrical cable from the formwork to the shaft or to the shunt box.





Connect the electricals according to the product sheet, check that it works properly and insert it into the formwork using light pressure.


REMOVE PLUS FORMWORK

Metal formwork for the REMOVE PLUS model for use during installation. Can be wall mounted on stone, brick or plasterboard. Necessary for correct installation.


548/2594

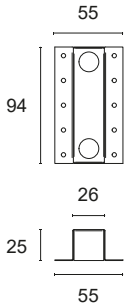

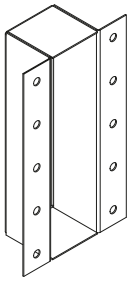




Insert the housing for the formwork and fix it with glue, putty or screws.



Finish off the edges of the formwork and prevent foreign bodies from entering the formwork.
Route the electrical cable from the formwork to the shaft or to the shunt box.





Connect the electricals according to the product sheet, check that it works properly and insert it into the formwork using light pressure.


REMOVE MINUS FORMWORK

Metal formwork for the REMOVE MINUS model for use during installation. Can be wall mounted on stone, brick or plasterboard. Necessary for correct installation.


548/253163

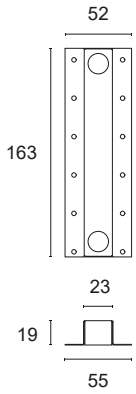

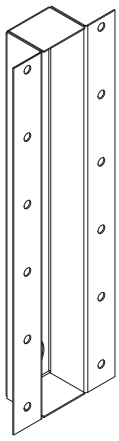




Insert the housing for the formwork and fix it with glue, putty or screws.



Finish off the edges of the formwork and prevent foreign bodies from entering the formwork.
Route the electrical cable from the formwork to the shaft or to the shunt box.




Connect the electricals according to the product sheet, check that it works properly and insert it into the formwork using light pressure.


DUVAR BASE AND STAKE

Mounting systems for DUVAR projector, necessary for correct installation.


TES0039




Fixing base

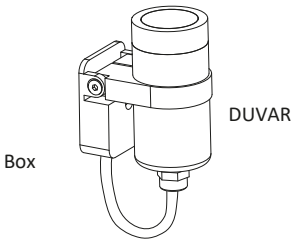

PDH235

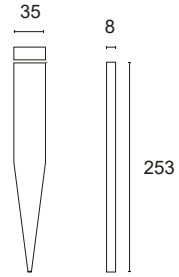

Fixing stake

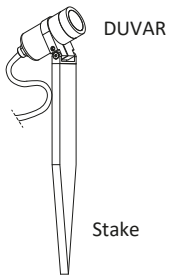







COMPLEMENTARY SYSTEMS

REM COMPLEMENTARY SYSTEMS 276
DARK COMPLEMENTARY SYSTEMS 276

COMPLEMENTARY SYSTEMS
REM

Ø32mm anodised aluminium directional projector decorated with CRI>90 LEDs for spot, decorative or courtesy lighting.
Choice of secondary optics, can be installed indoors, with concealed faceplate on Delta or Kappa pendant,
Delta or Kappa flush ceiling light, or flush-mounted Delta or Tau.
N.B. positioning, switch on management and other details to be defined in the order.

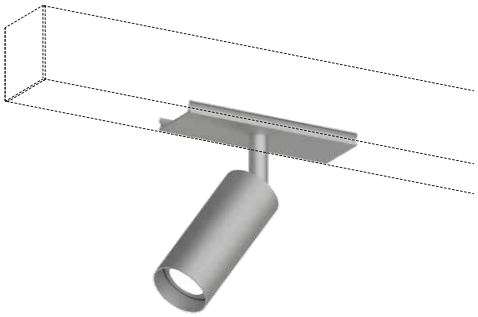

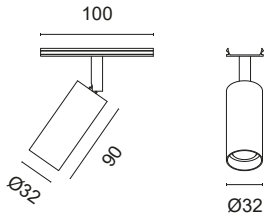



BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
RG1.	**1** White **2** Matt black **7** Brushed aluminium **9** Polished gold	**15** 15° **25** 25° **35** 35°	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** Amber	**3** 1x2W 500mA - 216 lm **5** 3x2W 500mA - 648 lm

Code example:
REM + White + Light Beam 15° + 4000K + 2W = Code: RG1.115BC3

DARK

320mm anodised aluminium module decorated with 14 high-efficiency CRI>90 LEDs for spot, decorative or courtesy lighting.
Choice of secondary optics, can be installed indoors, with flush-mounted faceplate on Delta or Kappa pendant,
Delta or Kappa flush ceiling light, or flush-mounted Delta or Tau.
N.B. positioning, switch on management and other details to be defined in the order.

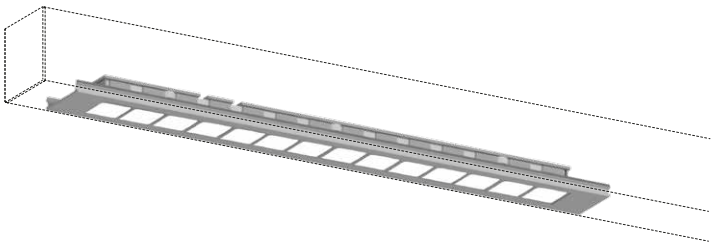

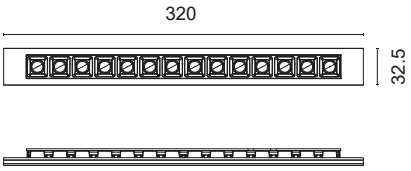

BASIC CODES	FACEPLATE FINISH	LIGHT BEAM	LED COLOUR	POWER
DK14.	**1** White **2** Matt black **7** Brushed aluminium *Other finishes on request.	**30** 30° **55** 55° **65** 65°	**BN** 4000K **BC** 3000K **CC** 2700K	**1 7.2W** **24Vdc - 780 lm**

Code example:
DARK + White + Light Beam 30° + 4000K + 7.2W = Code: DK14.130BN1



NANOLED LIGHTING

It is a brand of Tecnocavi Service srl
61021 Carpegna (PU) via Pian dei Roghi, 32
Tel. + 39 0722 77418
www.nanoledlighting.com

CONTACTS

Information office
info@nanoledlighting.com

Federico Francioni
Owner and Sales Manager
federico@nanoledlighting.com

Francesco Francioni Jr.
Italy Sales
commerciale@nanoledlighting.com

Fabrizio Francioni
Owner and Production and Procurement Manager
fabrizio@nanoledlighting.com

Francesco Francioni
Owner and General Management
francesco@nanoledlighting.com


Francesca Severi
Head of Administration
amministrazione@nanoledlighting.com

Remo Giuliani
Technical and design office
tecnico@nanoledlighting.com

2025 LIGHTING CATALOGUE Ed. 02

Graphic design and realisation: Team Nanoled Lighting

Tecnocavi Service S.r.l. accepts no liability for printing errors, measurements and technical data. The company reserves the right to make changes to the products illustrated, at any time, without prior notice. Unauthorised reproduction or copying is prohibited.

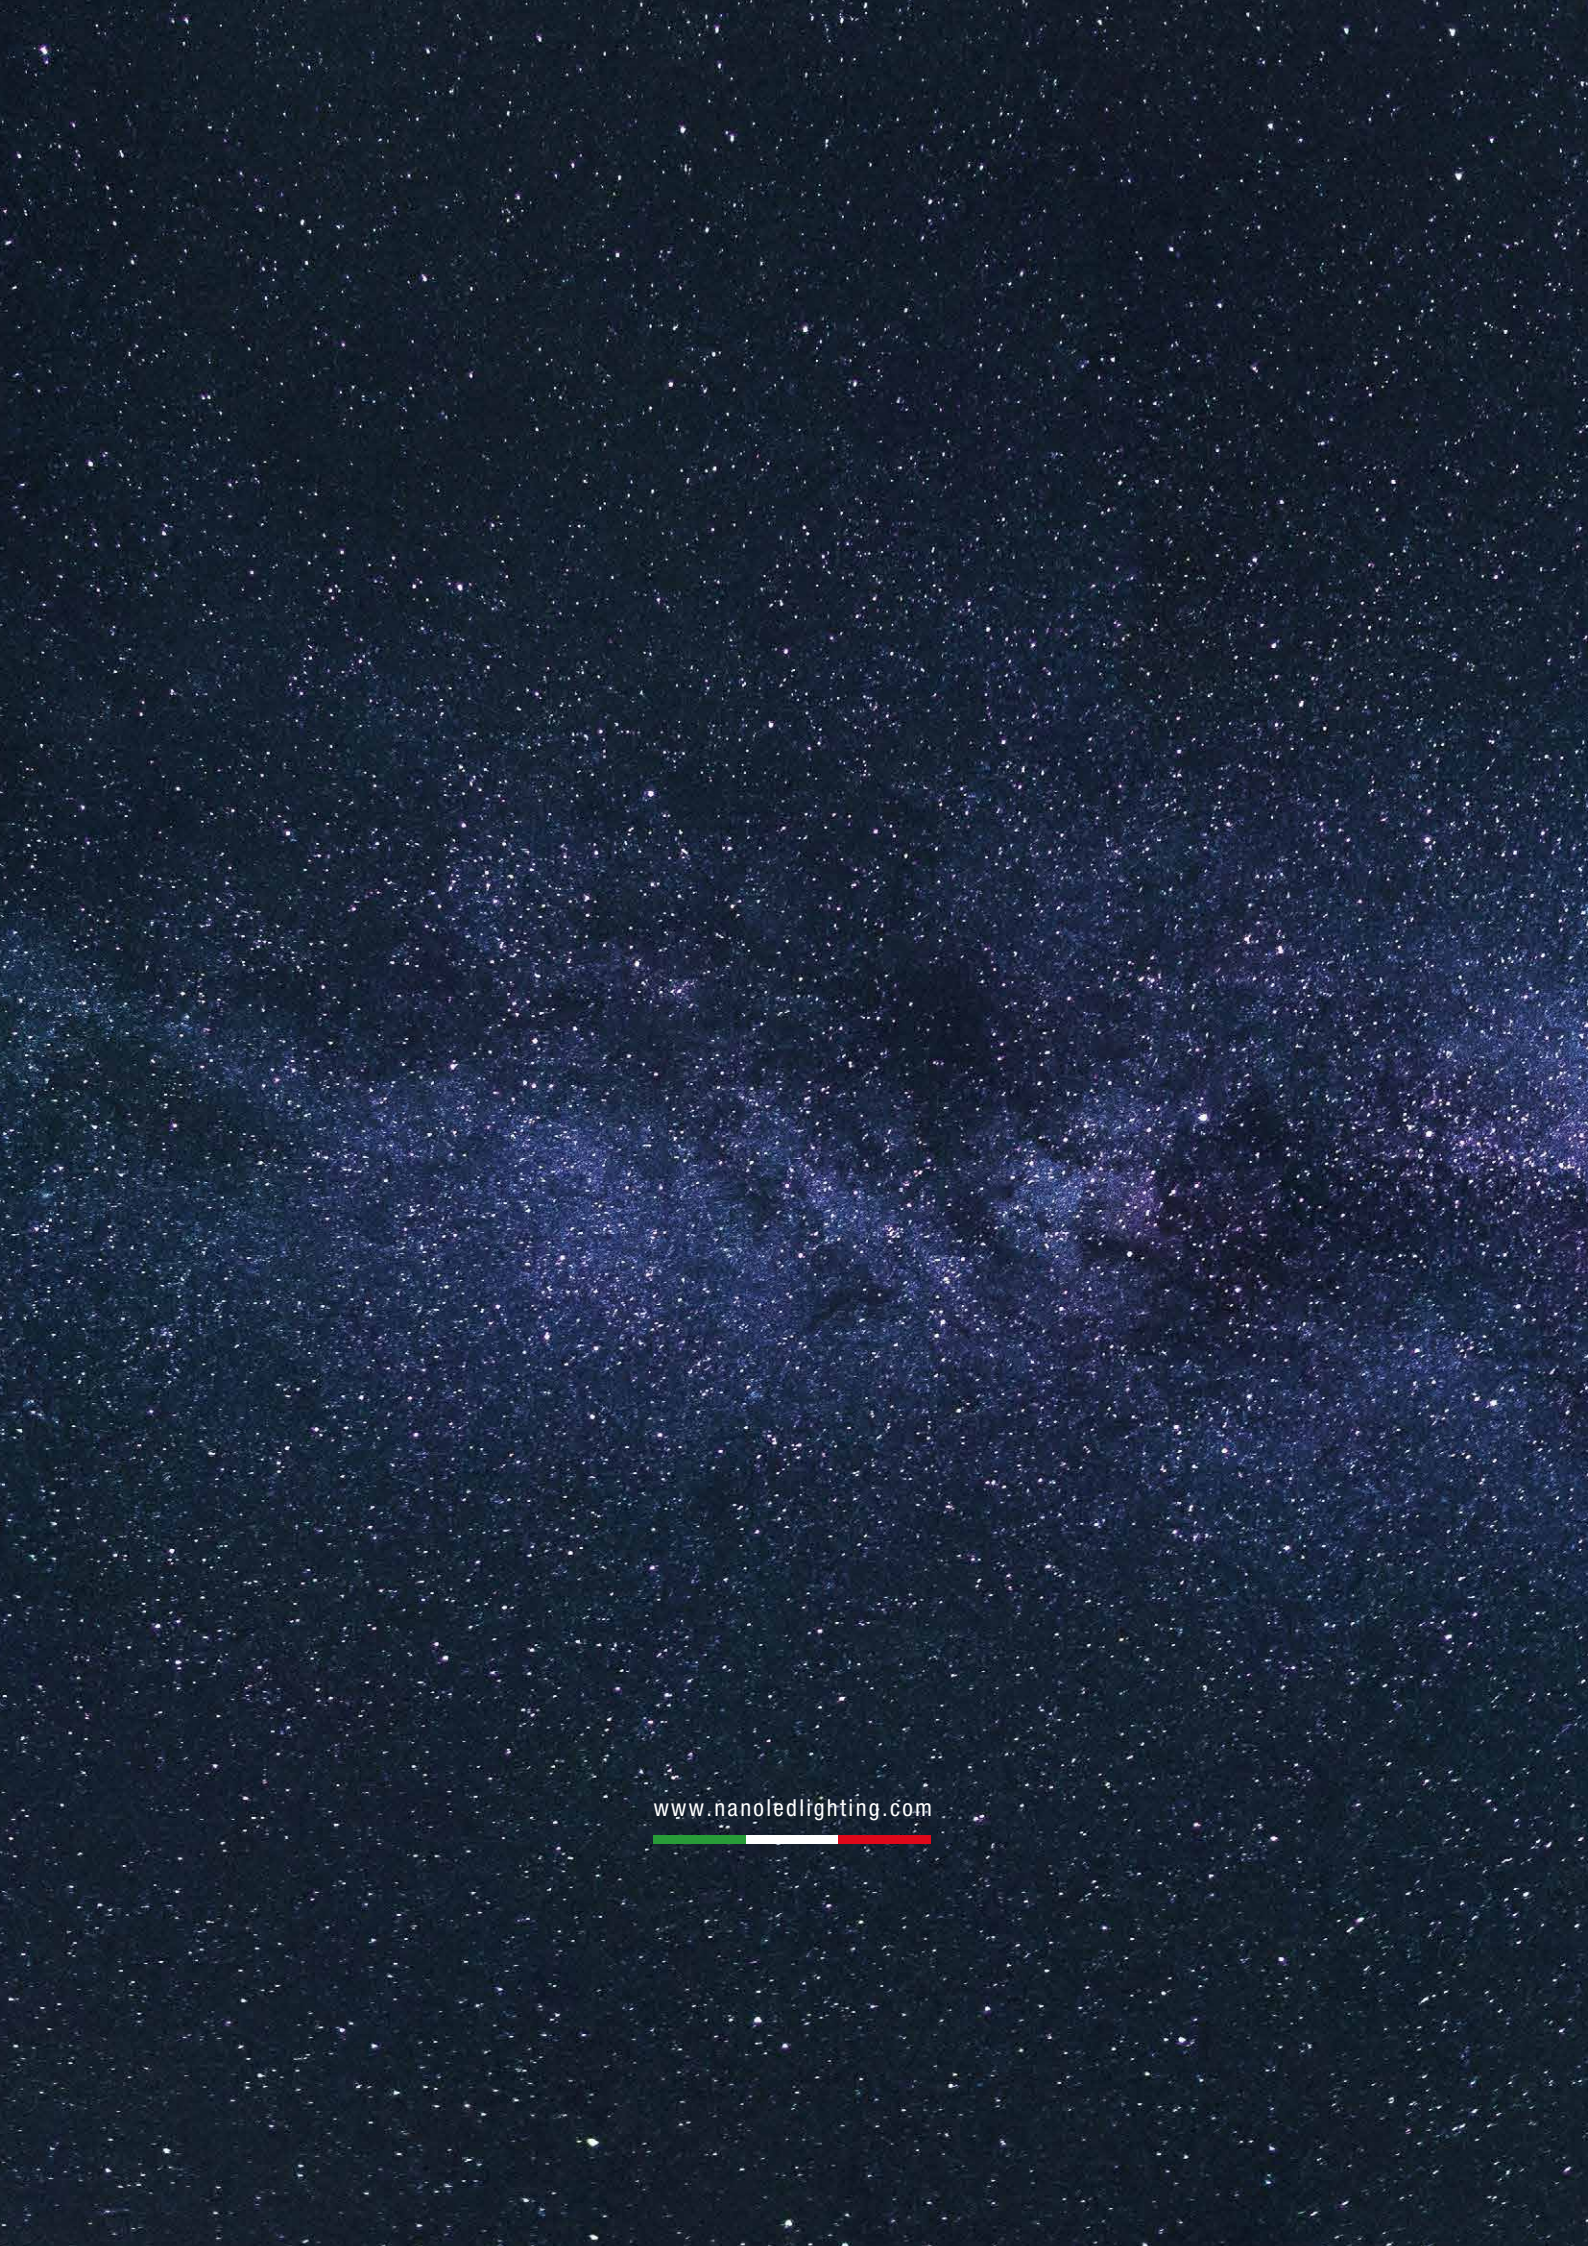

www.nanoledlighting.com