Wine and Champagne Collection





NANOLED LIGHTING
It is a brand of Tecnocavi Service srl
61021 Carpegna (PU) via Pian dei Roghi, 32
Tel. + 39 0722 77418
info@nanoledlighting.com

www.nanoledlighting.com

NANOLED LIGHTING has dedicated a series of specific and approved products for proper storage to the fascinating world of wine and champagne. Exposure to light has always conditioned the life of wine, from its birth, on the rows of vines, to the bottle. The light spectrum interacts directly with all the cells and atoms that make up matter. This process is triggered by both visible light, which are the colours of the spectrum that we see, and invisible light, of which UV (ultraviolet) and IR (infrared) are part.

Since ancient times, mankind has known that prolonged exposure of wine to light is harmful and conservation methods have always taken this into account. Closed amphorae were used, perhaps buried or kept in the cellar, as in the present day. The study of the colour of the bottles is also very wide-ranging; there are transparent, yellow, green and amber bottles. This means that knowledge and technique have made many steps forward and the quality of the wines on offer has increased a lot, so innovative solutions in production, distribution and storage have been devised.

Important studies by oenologists and specialists have highlighted a defect that emerges when wines, especially whites or rosés, produced with the classic or champenoise method are exposed to light. This phenomenon is also known as 'Light Strike' or 'Goût de Lumière' in French and gives champagne and wine an unpleasant smell and aftertaste that tastes like wool or boiled cabbage. The cause is the alteration of riboflavin and amino acids in wines exposed to light, which compromises the taste of important products from the Collio, Franciacorta, Langhe Piemontese and especially French wines from the Champagne production area (Montagne de Reims, Côte des Bancs, Vallée de la Marne, Côte de Sézanne and Aube).

The only solution is to prevent "Taste of Light" through proper storage in well-lit cellars or rooms.
The Comité Interprofessionnel du vin de Champagne (CIVC), following photometric tests that completely exclude the photometric spectrum harmful to wine, has declared NANOLED LIGHTING's "AMBRA VINO LEDs" compliant.

NANOLED LIGHTING has selected a collection of products to be included in specific and especially correct projects and installations for the storage and tasting of champagne and wine.
You will find our AMBRA VINO LED symbol next to each product in the Lighting Catalogue 2025 Ed.02 and on www.nanoledlighting.com

AMBRA VINO LED
Compliant with the standards of the
Comité Interprofessionnel du vin de Champagne
(CIVC)



INDEX BY PRODUCT FAMILY

MICROSPOT

HALLEY 12

INDOOR FLUSH FITTINGS

MINI VESTA 16
EOS 17
EOS Q 18
EOS CEILING LIGHT 19
EOS METAL 20
EOS METAL Q 21
BASIK 1 22
BASIK Q 23
BIONIK 1 24
BIONIK Q 25
FOUR HOLE 26
FOUR HOLE Q 27

INDOOR AND OUTDOOR RECESSED LIGHTS

HOLLY 30
HALISSA 31
MEMO 32
DEHO 2 33
DEHO 3 34
DEHO 4 35
DEHO 5 36
DEHO Q 37
DARDO 2 38
DARDO 3 39
DARDO Q 40
ACSO 1 41
ACSO 2 42
ACSO 3 43

PROJECTORS

DUVAR 46
VERTIGO 47
ZEPPELIN 48

DECORATIVE TECHNICAL LIGHTING

PIXEL 1 52
EVA 53
REM 54
CISO P31 CEILING LIGHT 55
CISO P33 CEILING LIGHT 56
CISO S31 PENDANT LIGHT 57
CISO S33 PENDANT LIGHT 58
CEILING ROSES FOR OTHER CISO COMPOSITIONS 59

INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK 62
ACSO SERIES FORMWORK 62
ACSO SERIES RING 62
DEHO AND DARDO SERIES FORMWORK 63
DEHO AND DARDO SERIES RING 63
DUVAR BASE AND STAKE 63

ALPHABETICAL INDEX

A

ACSO 1 41
ACSO 2 42
ACSO 3 43
ACSO SERIES FORMWORK 62
ACSO SERIES RING 62

B

DUVAR BASE AND STAKE 63
BASIK 1 22
BASIK Q 23
BIONIK 1 24
BIONIK Q 25

C

CEILING ROSES FOR OTHER CISO COMPOSITIONS 59
CISO P31 CEILING LIGHT 55
CISO P33 CEILING LIGHT 56
CISO S31 PENDANT LIGHT 57
CISO S33 PENDANT LIGHT 58

D

DARDO 2 38
DARDO 3 39
DARDO Q 40
DEHO 2 33
DEHO 3 34
DEHO 4 35
DEHO 5 36
DEHO AND DARDO SERIES FORMWORK 63
DEHO AND DARDO SERIES RING 63
DEHO Q 37
DUVAR BASE AND STAKE 63
DUVAR 46

E

EOS 17
EOS METAL 20
EOS METAL Q 21
EOS CEILING LIGHT 19
EOS Q 18
EVA 53

F

FOUR HOLE 26
FOUR HOLE Q 27

H

HALISSA 31
HALLEY 12
HOLLY 30
HOLLY, HALISSA AND MEMO FORMWORK 62

M

MEMO 32
MINI VESTA 16

P

PIXEL 1 52

R

REM 54

V

VERTIGO 47

Z

ZEPPELIN 48

SYMBOLS

Product compliant with European Electrical Safety Regulations.

Product subject to European WEEE regulations on disposal of items.

Product made with recyclable materials.

Category III Products powered by safety voltage below 50V.

Ingress Production (see below).

Product that can be installed both indoors and outdoors.

Product that can be installed indoors.

Indicates the theoretical weight of the product, without wiring.

Product suitable for mounting on normally flammable surfaces.

It means that the "wine"Amber color avoid the "taste of light". Suggest and approved by the Comité Interprofessionnel du vin de Champagne (CIVC) for the lighting of cellars, storage rooms and furnishings.

Product that can be inserted in furniture.

Indicates that the product can be walked on.

Indicates the type of optics (symmetrical or asymmetrical) and the degrees of aperture.

Size of hole to be drilled for mounting without formwork.

Indicates that the product can be dimmed.

Class I. Lighting system with earthing device.

Category II Lighting system with reinforced or double insulation, without earthing device.

Can be switched on by touching the metal surface.

Compliance with the RoHs Directive 2002/95/EC that bans the use of hazardous substances in electrical and electronic equipment (lead, mercury, etc.)

INGRESS PROTECTION IP..

The 'resistance' offered by the device to penetration by solids and liquids is indicated by the prefix IP (international protection) followed by two significant numbers. The first number identifies the degree of protection against the ingress of solids. The second number identifies the degree of protection against the ingress of liquids.

IP0. Unprotected.

IP1. Protected against a solid object greater than 50 mm.

IP2. Protected against a solid object greater than 12 mm.

IP3. Protected against a solid object greater than 2.5 mm.

IP4. Protected against a solid object greater than 1 mm.

IP5. Protected against ingress of dust.

IP6. Completely protected against ingress of dust.

IP.0 Unprotected.

IP.1 Protected against vertical dripping water.

IP.2 Protected against vertical dripping water when tilted up 15°.

IP.3 Protected against rain.

IP.4 Protected against vertical splashing.

IP.5 Protected against jets of water.

IP.6 Protected against waves.

IP.7 Protected against effects from temporary immersion.





MICROSPOT

HALLEY 12


HALLEY

L31.





Flush-fitted in polished aluminium for accent, decoration and courtesy lighting. Also indicated for 'starry sky'.
Choice of secondary optics, can be installed indoors and outdoors if partially protected, spring-mounted.


Power LED CRI>80
Power: 0,8W@350mA
Lumen: 50Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable

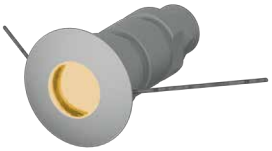

MADE IN ITALY



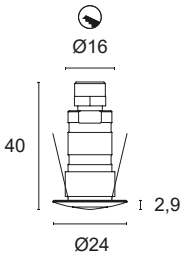

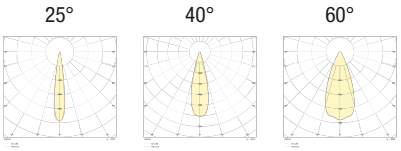

BASIC CODES

L31.

FINISHES

- **1** White
- **2** Matt black
- **6** Chrome
- **7** Brushed aluminium

LIGHT BAND

- **25** 25°
- **40** 40°
- **60** 60°

LED COLOUR

- **AM** "Wine" Amber

Approved by C I V C

Code example:
HALLEY + White + 40° light beam + “Wine” Amber = **Code: L31.140AM**





INDOOR FLUSH FITTINGS

MINI VESTA 16
EOS 17
EOS Q 18
EOS CEILING LIGHT 19
EOS METAL 20
EOS METAL Q 21
BASIK 1 22
BASIK Q 23
BIONIK 1 24
BIONIK Q 25
FOUR HOLE 26
FOUR HOLE Q 27

MINI VESTA

L9X.




Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.


Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable




MADE IN ITALY




L9X. 350mA



L9X. 500mA



120°



BASIC CODES	FINISHES	LIGHT BAND	LED COLOUR	POWER
L9X.	**1** White **6** Chrome **7** Brushed aluminium **8** Transparent	**00** 120°	**AM** "Wine" Amber Approved by C I V C	**3** 1x0.8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:
MINI VESTA + White + 120° light beam + "Wine" Amber + 0,8W = **Code: L9X.100AM3**

EOS

L95.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.


Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable




MADE IN ITALY


IP40 | KG 0,01 | F | M | M

L95. 350mA



L95. 500mA



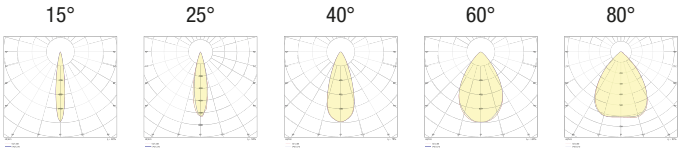

BASIC CODES

L95.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LIGHT BAND

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **AM** "Wine" Amber

Approved by C I V C

POWER

- **3** 1x0.8W - 350mA - 50 lm
- **5** 1x1,2W - 500mA - 70 lm

Code example:
EOS + Brushed aluminium + 15° light beam + "Wine" Amber + 0,8W = **Code: L95.715AM3**

EOS Q

L9Q.




Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable





MADE IN ITALY

L9Q. 350mA



L9Q. 500mA



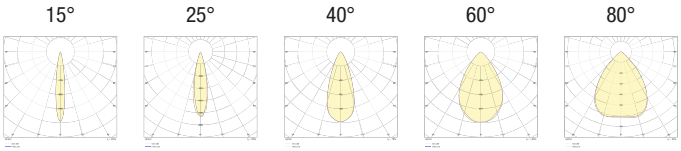

BASIC CODES

L9Q.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LIGHT BAND

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **AM** "Wine" Amber

Approved by C I V C

POWER

- **3** 1x0.8W - 350mA - 50 lm
- **5** 1x1,2W - 500mA - 70 lm

Code example:
EOS Q + Brushed aluminium + 15° light beam + "Wine" Amber + 0,8W = **Code: L9Q.715AM3**


EOS CEILING LIGHT

L95D.





Thermoplastic ceiling light for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, mounting with concealed screws.


Power LED CRI>80
Power: 0,8W@350mA
Lumen: 50Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





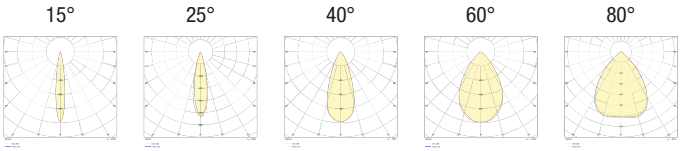

BASIC CODES

L95D.

FINISHES

- **1** White
- **2** Matt black
- **3** Brushed gold
- **6** Chrome
- **7** Brushed aluminium
- **8** Transparent
- **9** Polished gold

LIGHT BAND

- **15** 15°
- **25** 25°
- **40** 40°
- **60** 60°
- **80** 80°

LED COLOUR

- **AM** "Wine" Amber

Approved by C I V C


Code example:
EOS CEILING LIGHT + Brushed aluminium + 25° light beam + “Wine” Amber = **Code: L95D.725AM**

EOS METAL
L95M.




Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting.
Choice of secondary optics, can be installed indoors. Flush-mounted with springs.


Power LED CRI>80
Power: 1,2W@500mA
Lumen: 70Lm@500mA
500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





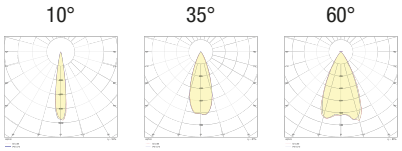

BASIC CODES

L95M.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LIGHT BAND

- **10** 10°
- **35** 35°
- **60** 60°

LED COLOUR

- **AM** "Wine" Amber

Approved by C I V C

Code example:
EOS METAL + Brushed aluminium + 40° light beam + "Wine" Amber = **Code: L95M.740AM**


EOS METAL Q

L9QM.




Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting.
Choice of secondary optics, can be installed indoors. Flush-mounted with springs.


Power LED CRI>80
Power: 1,2W@500mA
Lumen: 70Lm@500mA
500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





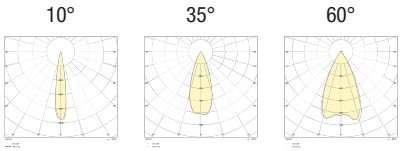

BASIC CODES

L95QM.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium

LIGHT BAND

- **10** 10°
- **35** 35°
- **60** 60°

LED COLOUR


- **AM** "Wine" Amber

Approved by C I V C

Code example:
EOS METAL Q + Brushed aluminium + 40° light beam + “Wine” Amber = **Code: L9QM.740AM**

BASIK 1

L01.

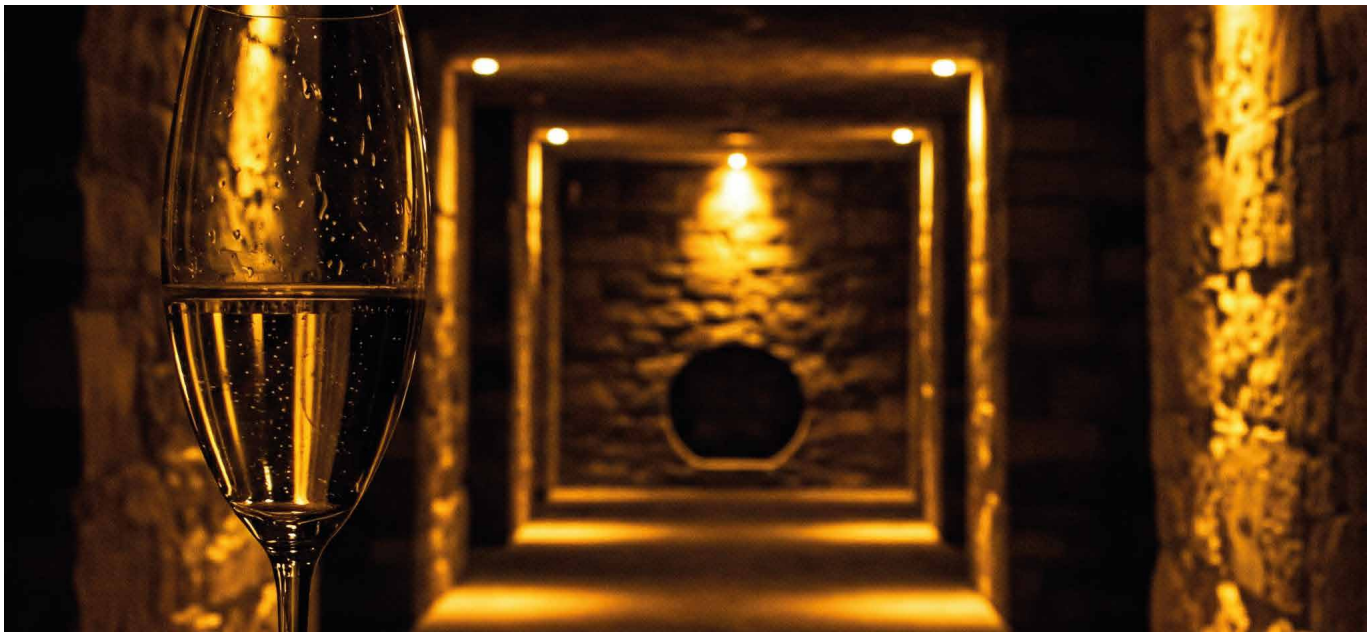


Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.

Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

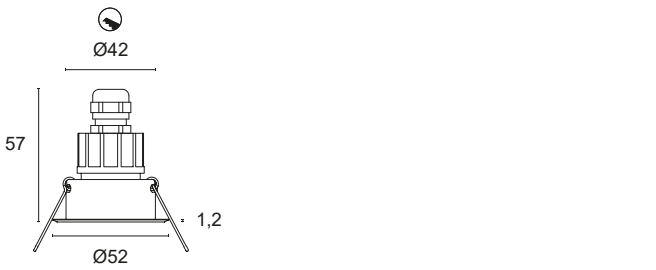




BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L01.	**1** White **2** Matt black **5** Gloss aluminium **6** Chrome **7** Brushed aluminium	**15** 15° **25** 25° **35** 35°	**AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
BASIK 1 + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = **Code: L01.715AM3**


BASIK Q

L02.

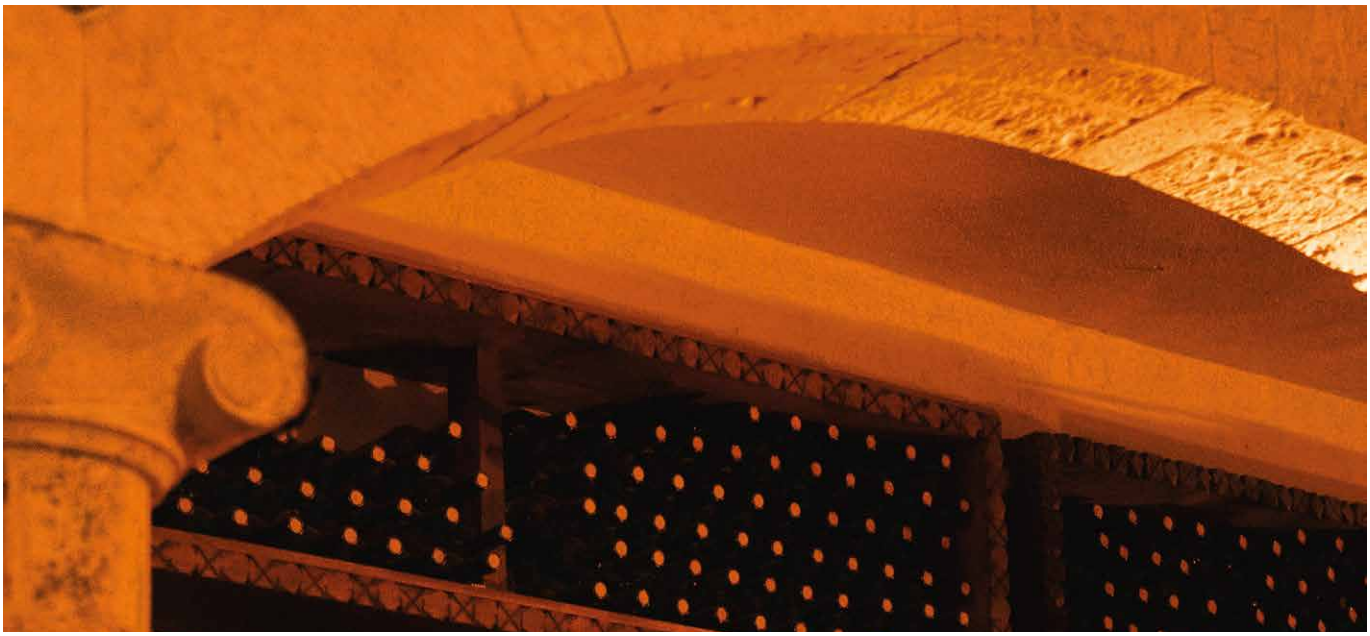


Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.

Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

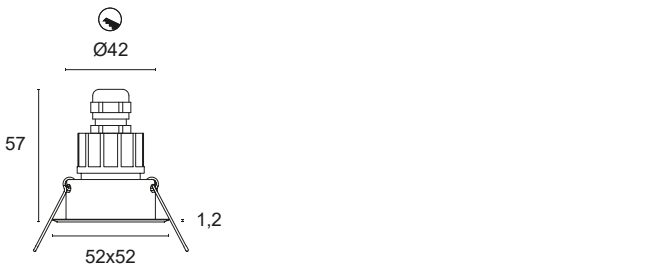




BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L02.	**1** White **2** Matt black **5** Gloss aluminium **6** Chrome **7** Brushed aluminium	**15** 15° **25** 25° **35** 35°	**AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
BASIK Q + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = **Code: L02.715AM3**

BIONIK 1

L21.

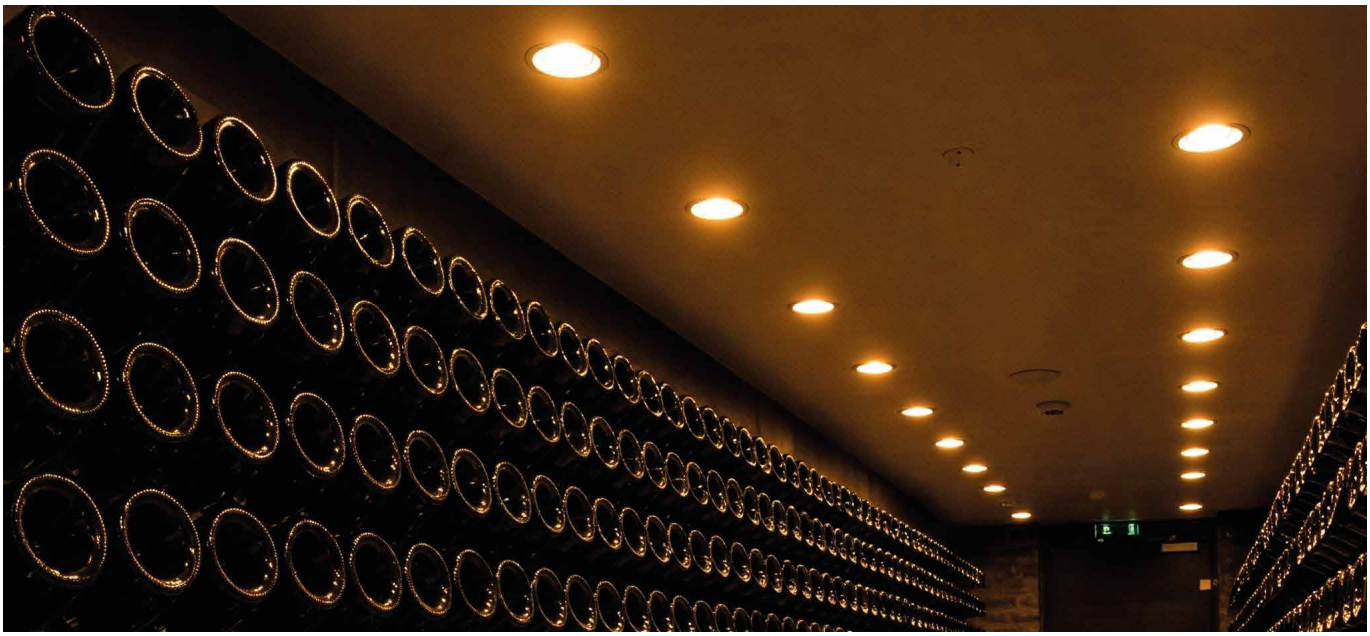


Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected.
Flush-mounted with springs.

Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY






BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L21.	**1** White **2** Matt black **5** Gloss aluminium **6** Chrome **7** Brushed aluminium	**15** 15° **25** 25° **35** 35°	**AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
BIONIK 1 + Brushed aluminium + 15° light beam + “Wine” Amber + 2,4W = **Code: L21.715AM3**


BIONIK Q

L22.

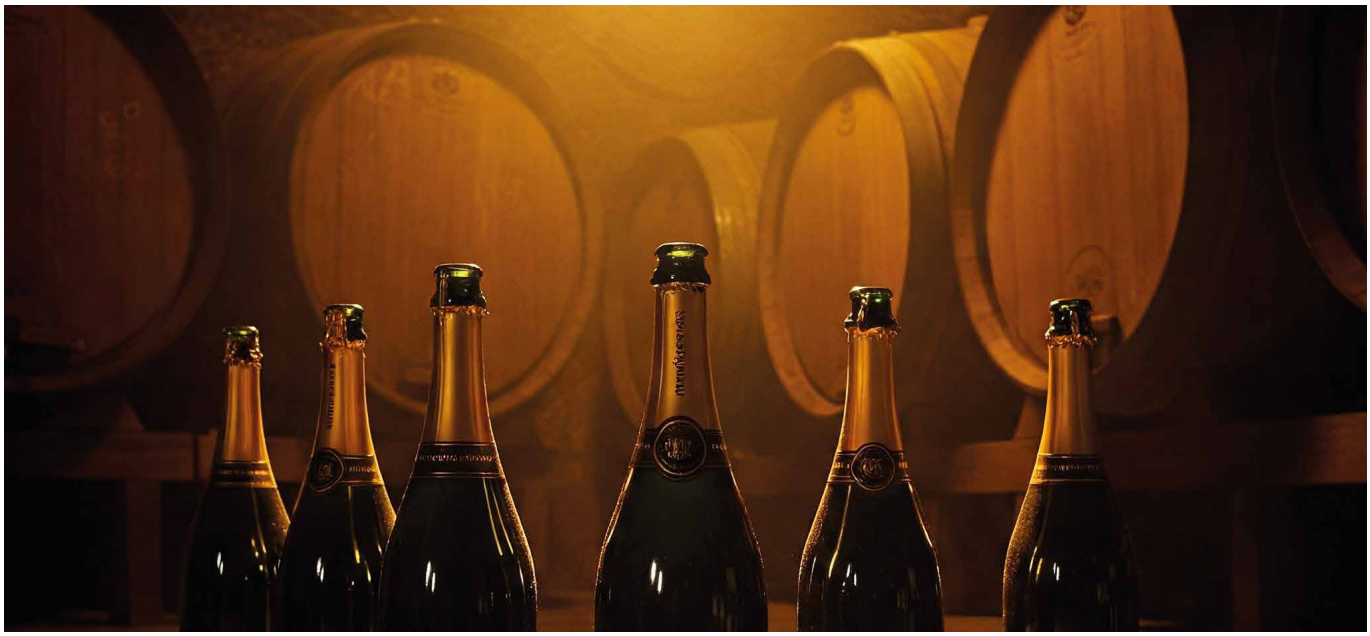



Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

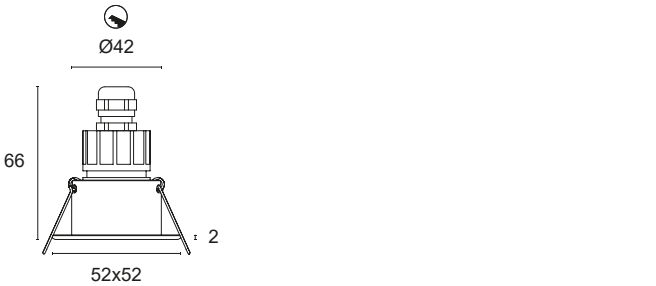

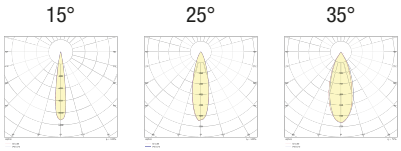

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L22.	**1** White **2** Matt black **5** Gloss aluminium **6** Chrome **7** Brushed aluminium	**15** 15° **25** 25° **35** 35°	**AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
BIONIK Q + Brushed aluminium + 15° light beam + “Wine” Amber + 2,4W = **Code: L22.715AM3**


FOUR HOLE

L24.





Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80
Power: 3,2W@350mA – 4,8W@500mA
Lumen: 200Lm@350mA – 280Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY



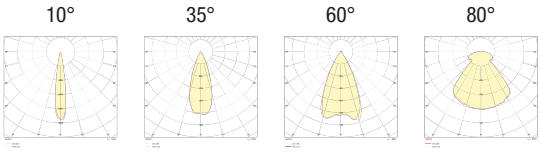

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L24.	**1** White	**10** 10°	**AM** "Wine" Amber	**3** 4x0,8W - 350mA - 200 lm
	2 Matt black	**35** 35°	Approved by C I V C	**5** 4x1,2W - 500mA - 280 lm
	5 Gloss aluminium	**60** 60°		
	7 Brushed aluminium	**80** 80°		

Code example:
FOUR HOLE + White + 80° light beam + "Wine" Amber + 3,2W = **Code: L24.180AM3**


FOUR HOLE Q

L25.




Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.

Power LED CRI>80
Power: 3,2W@350mA - 4,8W@500mA
Lumen: 200Lm@350mA - 280Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY



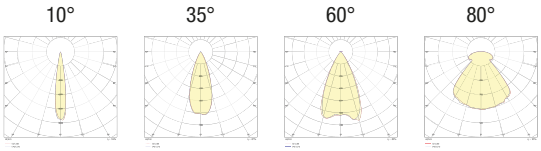

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L25.	**1** White	**10** 10°	**AM** "Wine" Amber	**3** 4x0,8W - 350mA - 200 lm
	2 Matt black	**35** 35°	Approved by C I V C	**5** 4x1,2W - 500mA - 280 lm
	5 Gloss aluminium	**60** 60°		
	7 Brushed aluminium	**80** 80°		


Code example:
FOUR HOLE Q + White + 80° light beam + "Wine" Amber + 3,2W = **Code: L25.180AM3**



INDOOR AND OUTDOOR RECESSED LIGHTS

HOLLY 30
HALISSA 31
MEMO 32
DEHO 2 33
DEHO 3 34
DEHO 4 35
DEHO 5 36
DEHO Q 37
DARDO 2 38
DARDO 3 39
DARDO Q 40
ACSO 1 41
ACSO 2 42
ACSO 3 43

HOLLY
L30R.

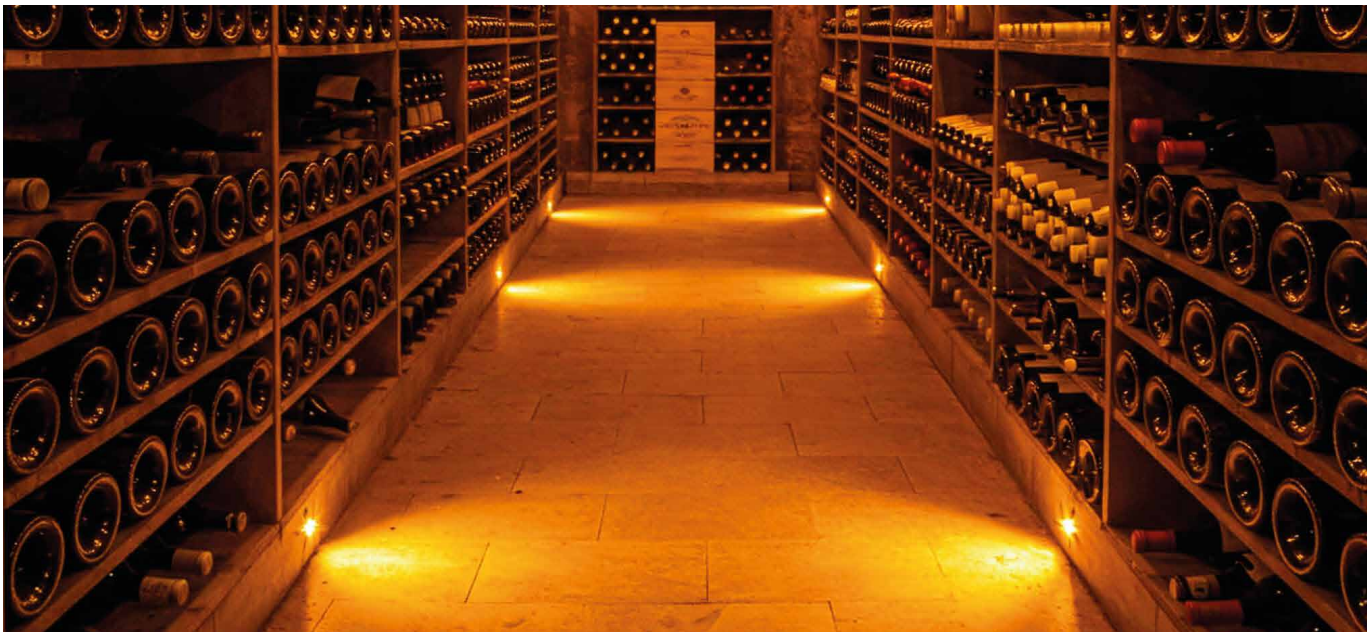

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork.


Power LED CRI>80
Power: 0,8W@350mA
Lumen: 50Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable




MADE IN ITALY

IP67

KG 0,02



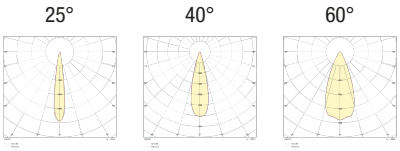


BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L30R.	**25** 25° **40** 40° **60** 60°	**T** Transparent **S** Brushed	**AM** "Wine" Amber Approved by C I V C

Code example:
HOLLY + 25° light beam + Transparent glass + "Wine" Amber = **Code: L30R.25TAM**

HALISSA

L30Q.

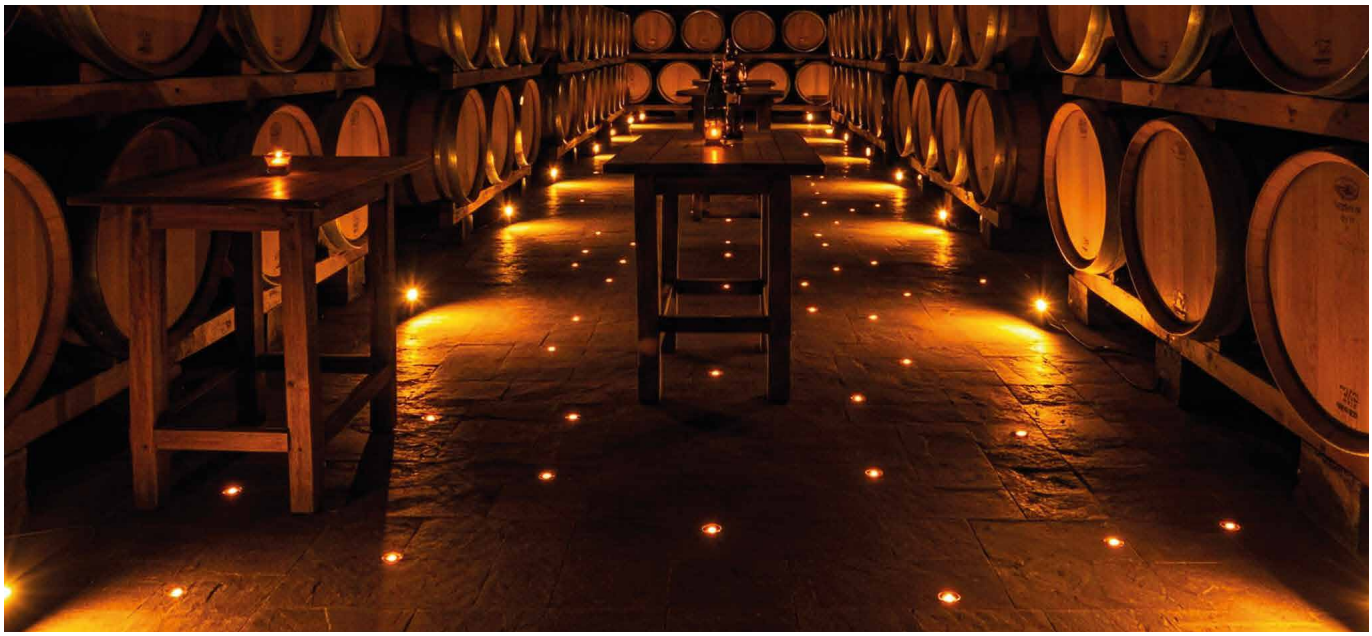


Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork.


Power LED CRI>80
Power: 0,8W@350mA
Lumen: 50Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY






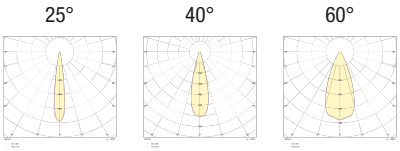

BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L30Q.	**25** 25° **40** 40° **60** 60°	**T** Transparent **S** Brushed	**AM** "Wine" Amber Approved by C I V C

Code example:
HALISSA + 25° light beam + Transparent glass + "Wine" Amber = **Code: L30Q.25TAM**

MEMO
L30S.

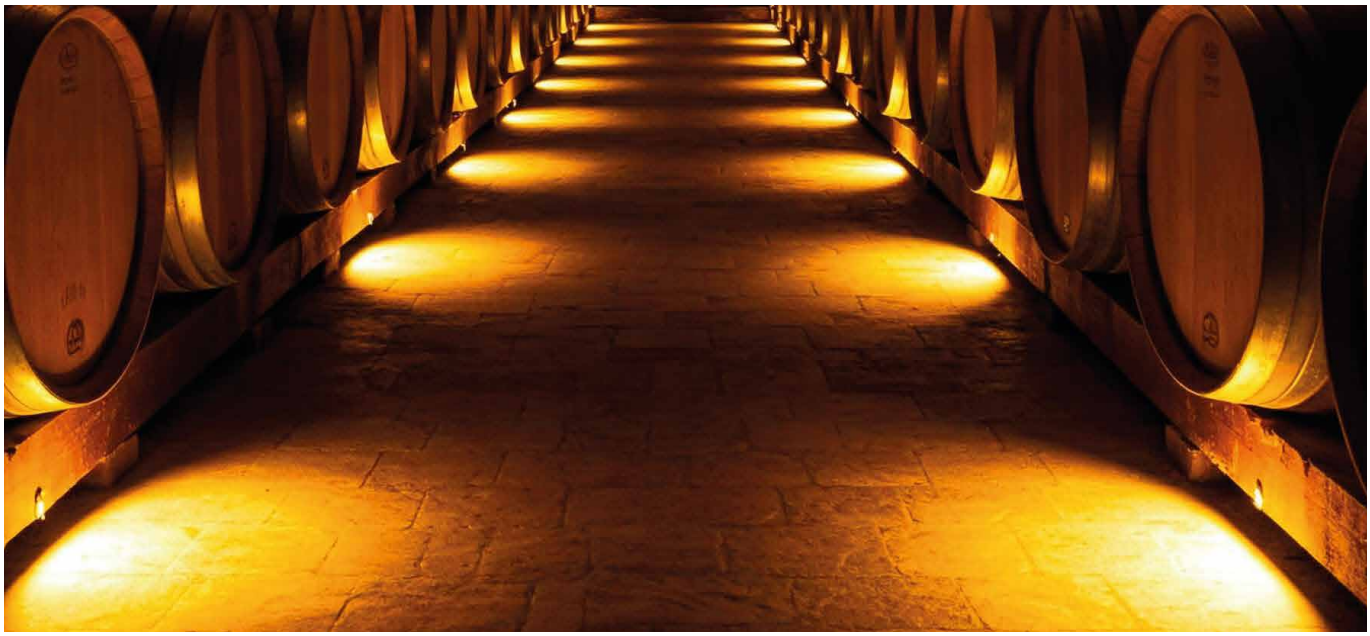


Flush-fitted in polished 304 stainless steel with power LED for decoration, courtesy or step marker lighting. Diffuse lighting with anti-glare cowling. Can be fitted in the wall or floor, indoors and outdoors.
Mounting with formwork.

Power LED CRI>80
Power: 0,8W@350mA
Lumen: 50Lm@350mA
350mA constant current power supply
Series connection, 50 cm cable




MADE IN ITALY





120°



BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR
L30S.	**R1** Radial 1 aperture	**T** Transparent	**AM** "Wine" Amber
			Approved by C I V C

Code example:
MEMO + Radial light beam 1 aperture + Transparent glass + "Wine" Amber = **Code: L30S.R1TAM**

DEHO 2

L402.




Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.


Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

IP67 KG 0,12



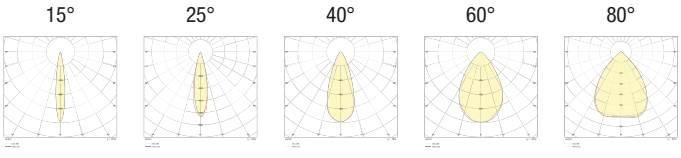


BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L402.	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**T** Transparent **S** Brushed	**AM** "Wine" Amber Approved by C I V C	**3** 1x0.8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:
DEHO 2 + 25° light beam + Transparent glass + "Wine" Amber + 0,8W = **Code: L402.25TAM3**

DEHO 3

L403.

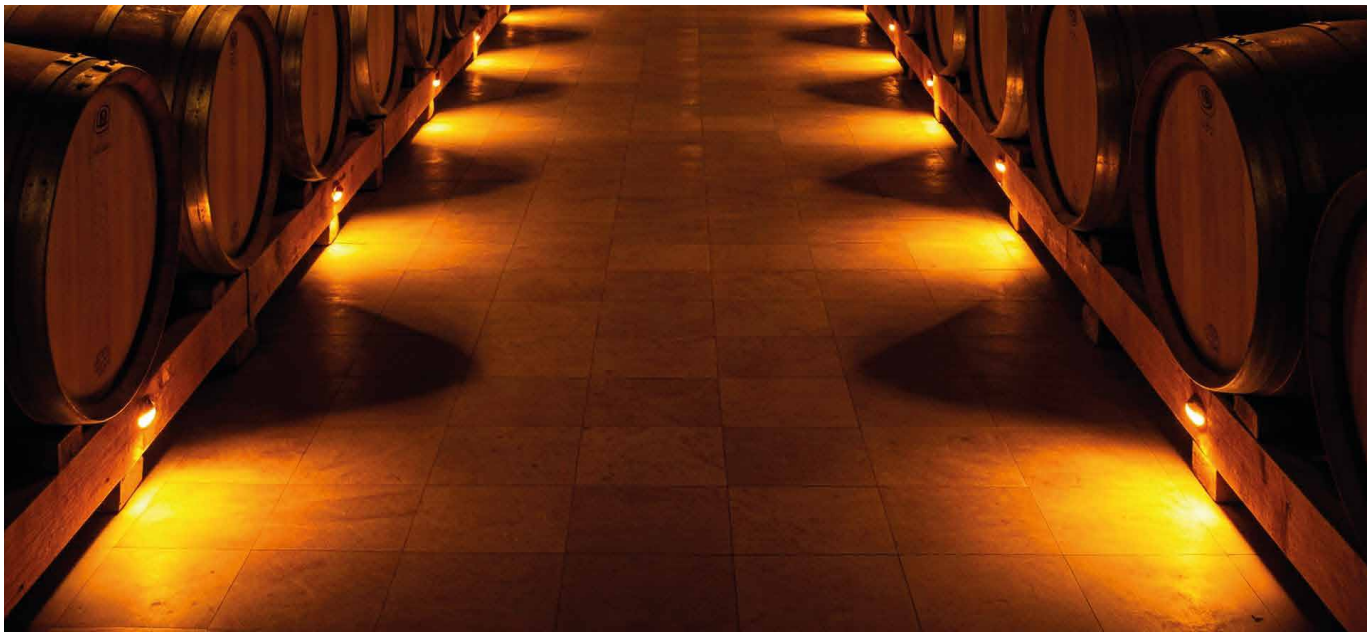


Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L403.	**R1** Radial 1 aperture	**AM** "Wine" Amber Approved by C I V C	**3** 1x0,8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:
DEHO 3 + Radial light beam 1 aperture + "Wine" Amber + 0,8W = **Code: L403.R1AM3**

DEHO 4

L404.




Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L404.	**R5** Radial 5 apertures	**AM** "Wine" Amber Approved by C I V C	**3** 1x0,8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:
DEHO 4 + Radial light beam 5 apertures + "Wine" Amber + 0,8W = **Code: L404.R5AM3**

DEHO 5
L402B




Flush-fitted in polished 304 stainless steel for decoration, courtesy and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.

Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L402B.	**R2** Radial 2 apertures	**AM** "Wine" Amber Approved by C I V C	**3** 1x0,8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:
DEHO 5 + Radial light beam 2 apertures + "Wine" Amber + 0,8W = **Code: L402B.R2AM3**

DEHO Q

L405.





Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50Lm@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

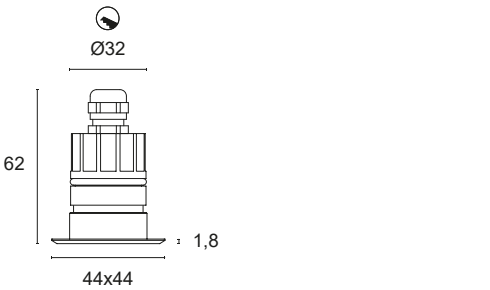

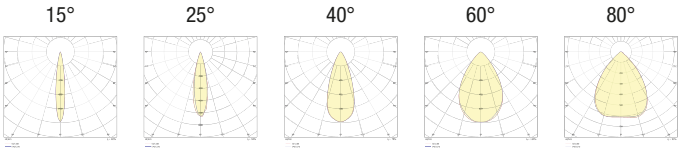


BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L405.	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**T** Transparent **S** Brushed	**AM** "Wine" Amber Approved by C I V C	**3** 1x0,8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:
DEHO Q + 25° light beam + Transparent glass + "Wine" Amber + 0,8W = **Code: L405.25TAM3**

DARDO 2

L502.

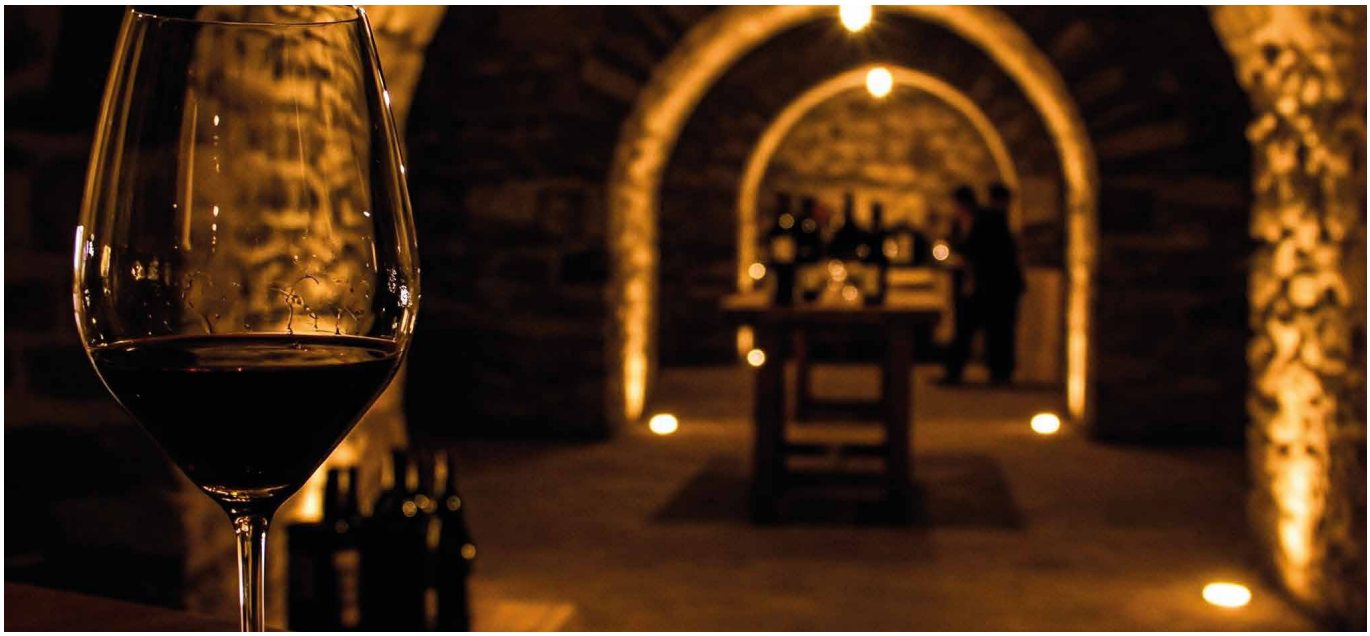

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.


Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

IP67

KG 0,12





BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L502.	**15** 15° **25** 25° **35** 35°	**T** Transparent **S** Brushed	**AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
DARDO 2 + 15° light beam + Transparent glass + "Wine" Amber + 2,4W = **Code: L502.15TAM3**

DARDO 3

L503.




Flush-fitted in polished 304 steel with powerful LEDs suitable for decorative lighting and as step markers. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L503.	**R5** Radial 5 apertures	**AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
DARDO 3 + Radial light beam 5 apertures + "Wine" Amber + 2,4W = **Code: L503.R5AM3**

DARDO Q

L504.




Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting.
Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors.
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L504.	**15** 15° **25** 25° **35** 35°	**T** Transparent **S** Brushed	**BN** 4000K **BC** 3000K **CC** 2700K **BL** Blue **VE** Green **RO** Red **AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
DARDO Q + 15° light beam + Transparent glass + "Wine" Amber + 2,4W = **Code: L504.15TAM3**


ACSO 1

L601.





Polished 304 steel recessed light with power LEDs for primary floor lighting of green areas and architectural facades.
Choice of secondary optics. Can be flush fitted indoors and outdoors
Mounting with formwork or ring with springs.

Power LED CRI>80
Power: 3,2W@350mA - 4,8W@500mA
Lumen: 200m@350mA - 280Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

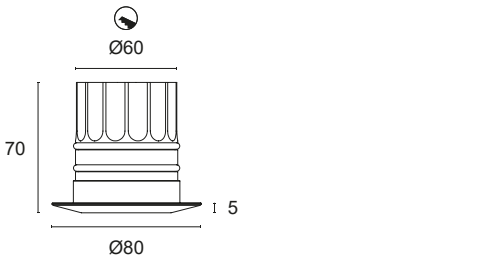

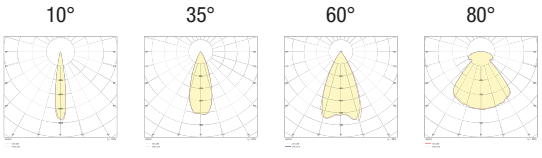

BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L601.	**10** 10° **35** 35° **60** 60° **80** 80°	**T** Transparent **S** Brushed	**AM** "Wine" Amber Approved by C I V C	**3** 4x0,8W - 350mA - 200 lm **5** 4x1,2W - 500mA - 280 lm

Code example:
ACSO 1 + 35° light beam + Transparent glass + "Wine" Amber + 3,2W = **Code: L601.35TAM3**

ACSO 2

L602.



Flush-fitted in polished 304 stainless steel with power LED for accent and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.


Power LED CRI>80
Power: 3,2W@350mA - 4,8W@500mA
Lumen: 200m@350mA - 280Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY

IP67

KG 0,40



BASIC CODES	LIGHT BEAM	LED COLOUR	POWER
L602.	**R4** Radial 4 apertures	**AM** "Wine" Amber Approved by C I V C	**3** 4x0,8W - 350mA - 200 lm **5** 4x1,2W - 500mA - 280 lm

Code example:
ACSO 2 + Radial light beam 4 apertures + "Wine" Amber + 3,2W = **Code: L602.R4AM3**


ACSO 3

L603.




Flush-fitted in polished 304 stainless steel with power LED for accent or step marker lighting. Asymmetrical optics.
Can be fitted in the floor indoors and outdoors, mounting with formwork.

Power LED CRI>80
Power: 0,8W@350mA - 1,2W@500mA
Lumen: 50m@350mA - 70Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable




MADE IN ITALY





40°



BASIC CODES	LIGHT BEAM	GLASS	LED COLOUR	POWER
L603.	**40** 40° Asymmetric	**T** Transparent	**AM** "Wine" Amber Approved by C I V C	**3** 1x0,8W - 350mA - 50 lm **5** 1x1,2W - 500mA - 70 lm

Code example:
ACSO 3 + 40° light beam + Transparent glass + "Wine" Amber + 0,8W = **Code: L603.40AMC3**



PROJECTORS

DUVAR 46
VERTIGO 47
ZEPPELIN 48

DUVAR

L23.





Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for decorative, accent, courtesy and general lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base or stake.


Power LED CRI>80
Power: 2,4W@350mA - 3,6W@500mA
Lumen: 150Lm@350mA - 210Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY



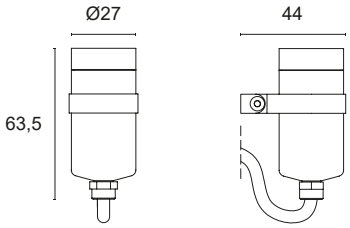

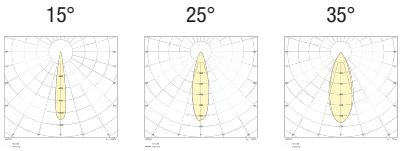


BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L23.	**2** Matt black **7** Brushed aluminium	**15** 15° **25** 25° **35** 35°	**AM** "Wine" Amber Approved by C I V C	**3** 3x0,8W - 350mA - 150 lm **5** 3x1,2W - 500mA - 210 lm

Code example:
DUVAR + Brushed aluminium + 15° light beam + “Wine” Amber + 2,4W = **Code: L23.715AM3**

VERTIGO

L14.

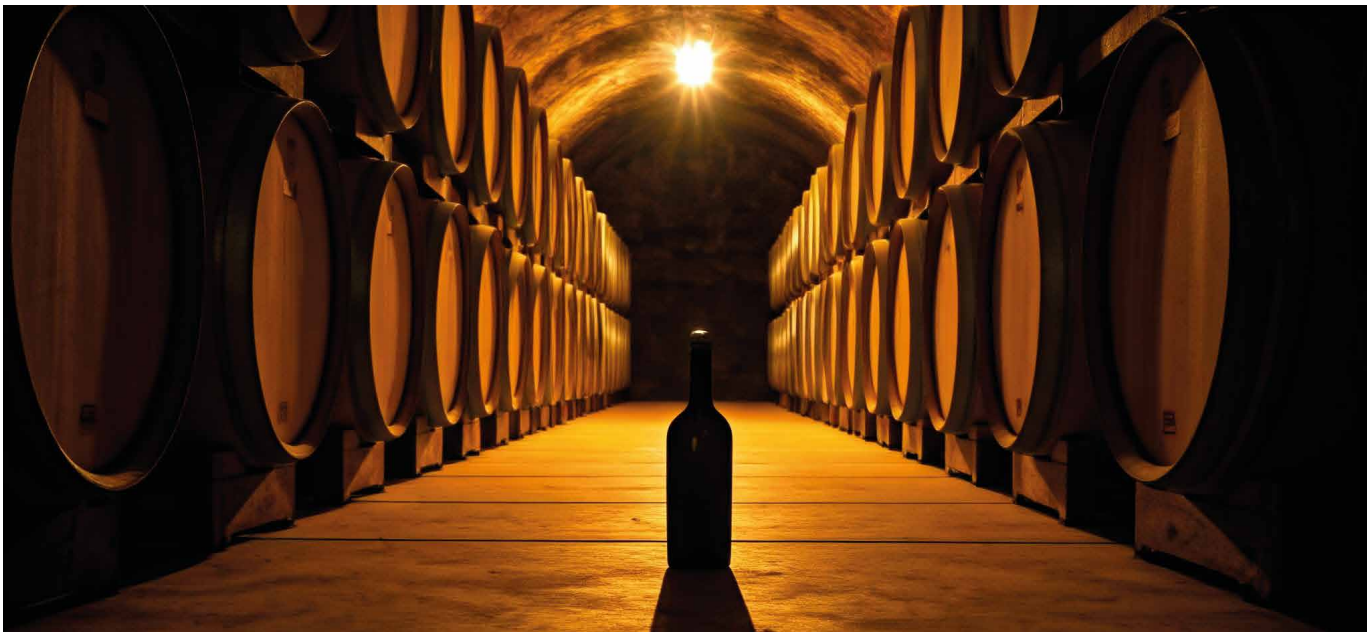


Directional projector in anticorodal anodised or decorated aluminium with power LEDs. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.


Power LED CRI>80
Power: 3,2W@350mA - 4,8W@500mA
Lumen: 200Lm@350mA - 280Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable




MADE IN ITALY







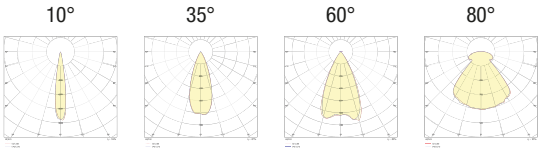

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L14.	**2** Matt black **7** Brushed aluminium	**10** 10° **35** 35° **60** 60° **80** 80°	**AM** "Wine" Amber Approved by C I V C	**3** 4x0,8W - 350mA - 200 lm **5** 4x1,2W - 500mA - 280 lm

Code example:
VERTIGO + Brushed aluminium + 10° light beam + "Wine" Amber + 3,2W = **Code: L14.710AM3**


ZEPPELIN

L06.





Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.


Power LED CRI>80
Power: 7,2W@350mA - 10,8W@500mA
Lumen: 450Lm@350mA - 630Lm@500mA
350mA - 500mA constant current power supply
Series connection, 50 cm cable

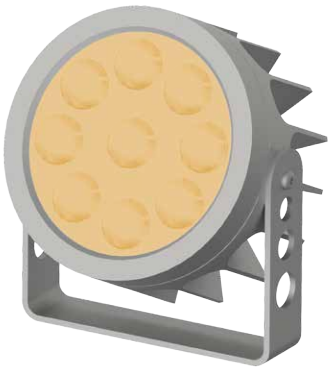

MADE IN ITALY



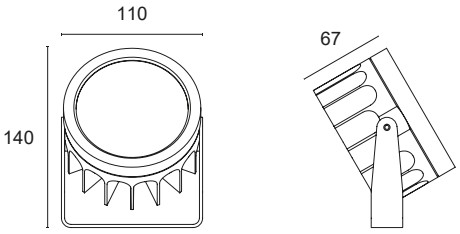

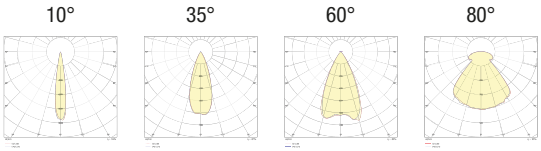

BASIC CODES	FINISHES	LIGHT BEAM	LED COLOUR	POWER
L06.	**2** Matt black **7** Brushed aluminium	**10** 10° **35** 35° **60** 60° **80** 80°	**AM** "Wine" Amber Approved by C I V C	**3** 9x0,8W - 350mA - 450 lm **5** 9x1,2W - 500mA - 630 lm

Code example:
ZEPPELIN + Matt black + 10° light beam + "Wine" Amber + 7,2W = **Code: L06.210AM3**





DECORATIVE TECHNICAL LIGHTING

PIXEL 1 52
EVA 53
REM 54
CISO P31 CEILING LIGHT 55
CISO P33 CEILING LIGHT 56
CISO S31 PENDANT LIGHT 57
CISO S33 PENDANT LIGHT 58
CEILING ROSES FOR OTHER CISO COMPOSITIONS 59


PIXEL 1

F10.




Directional lamp in polished, flexible aluminium suitable for reading, decoration or courtesy lighting. Choice of secondary optics, can be installed indoors. Screw mounting with base or on wall.

Power LED CRI>80
Power: 0,8W@350mA
Lumen: 50Lm@350mA
350mA constant current power supply
Constant current power supply included

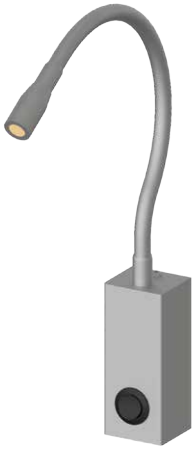



MADE IN ITALY

F10. base w/box



F10. flat base



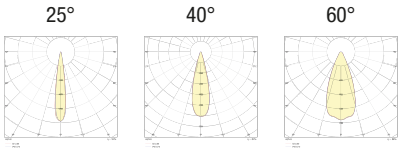

BASIC CODES

F10.

FINISHES

- **6** Chrome
- **7** Brushed aluminium

LIGHT BEAM

- **25** 25°
- **40** 40°
- **60** 60°

LED COLOUR

- **AM** "Wine" Amber
- Approved by C I V C

BASE W/BOX AND SWITCH

- **BX** without switch
- **BB** with white switch
- **BB** with black switch

FLAT BASE AND SWITCH

- **PX** without switch
- **PB** with white switch
- **PN** with black switch

Code example:
PIXEL 1 + Brushed aluminium + 25° light beam + "Wine" Amber + Flat base white switch = **Code: F10.725AMPB**


EVA

L33.




Dual-emission lamp in polished aluminium for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base.


Power LED CRI>80
Power: 1,2W+1,2W@500mA
Lumen: 70+70Lm@500mA
500mA constant current power supply
Power supply included and built in.

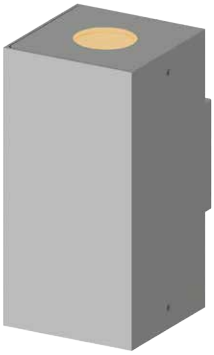

MADE IN ITALY






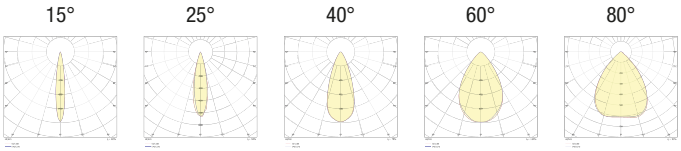

BASIC CODES	FINISHES	1st LIGHT BEAM	2nd LIGHT BEAM	LED COLOUR
L33.	**1** White	**15** 15°	**15** 15°	**AM** "Wine" Amber
	2 Matt black	**25** 25°	**25** 25°	Approved by C I V C
	7 Brushed aluminium	**40** 40°	**40** 40°	
		60 60°	**60** 60°	
		80 80°	**80** 80°	

Code example:
EVA + Matt black + 15° 1st light beam + 40° 2nd light beam + “Wine” Amber = **Code: L33.21540AM**

REM
RG32.

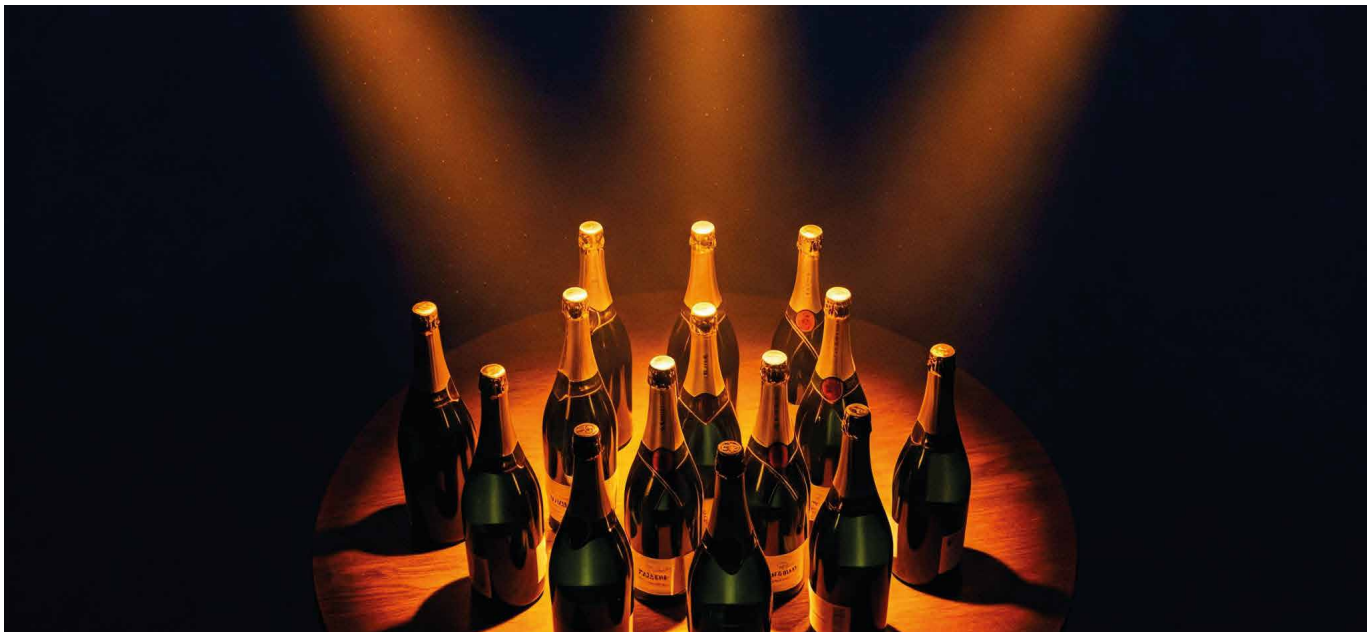


Ø32mm decorated aluminium directional projector decorated with power LEDs for spot, decorative, reading or courtesy lighting. Choice of secondary optics, can be installed indoors. Mounting with concealed insert.


Power LED CRI>80
Power: 1,2W@500mA - 3,6W@500mA
Lumen: 70Lm@500mA - 210Lm@500mA
500mA constant current power supply
Series connection, 50 cm cable



MADE IN ITALY





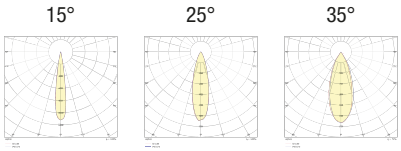

BASIC CODES	MEASUREMENTS	FINISHES	LIGHT BEAM	LED COLOUR	POWER
RG32.	**A** Ø32 - H 130mm **B** Ø32 - H 145mm	**1** White **2** Matt black **7** Brushed aluminium **9** Polished gold	**15** 15° **25** 25° **35** 35°	**AM** "Wine" Amber Approved by C I V C	**3** 1x2W 500mA - 216 lm **5** 3x2W 500mA - 648 lm

Code example:
REM + H130mm + White + 15° light beam + "Wine" Amber + 1,2W = **Code: RG32.A115AM3**

CISO P31 CEILING LIGHT

P31.




Ø32mm decorated aluminium cylinder ceiling light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors.
Mounting with concealed base.


Power LED CRI>80
Power: 1,2W@500mA
Lumen: 70Lm@500mA
500mA constant current power supply
Power supply included and remote



MADE IN ITALY





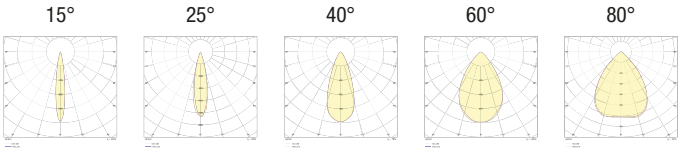

BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR
P31.	**A** H 90mm	**1** White	**15** 15°	**AM** "Wine" Amber
	B H 180mm	**2** Matt black	**25** 25°	Approved by C I V C
	C H 290mm	**5** Gloss aluminium	**40** 40°	
	D H 470mm	**7** Brushed aluminium	**60** 60°	
	E H 760mm	**8** Gold leaf	**80** 80°	
		9 Bond Copper		

Code example:
CISO P31 CEILING LIGHT + H470mm + White + 15° light beam + "Wine" Amber = **Code: P31.D115AM**

CISO P33 CEILING LIGHT

P33.



Ø32mm decorated aluminium cylinder ceiling light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>80
Power: 3,6W@500mA
Lumen: 210Lm@500mA
500mA constant current power supply
Power supply included and remote



MADE IN ITALY

Size

Ø32



BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR
P33.	**A** H 90mm **B** H 180mm **C** H 290mm **D** H 470mm **E** H 760mm	**1** White **2** Matt black **5** Gloss aluminium **7** Brushed aluminium **8** Gold leaf **9** Bond Copper	**15** 15° **25** 25° **35** 35°	**AM** "Wine" Amber Approved by C I V C

Code example:
CISO P33 CEILING LIGHT + H470mm + White + 15° light beam + "Wine" Amber = **Code: P33.D115AM**

CISO S31 PENDANT LIGHT

S31.




Ø32mm decorated aluminium cylinder suspended light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.


Power LED CRI>80
Power: 1,2W@500mA
Lumen: 70Lm@500mA
500mA constant current power supply
Power supply included and integrated



MADE IN ITALY





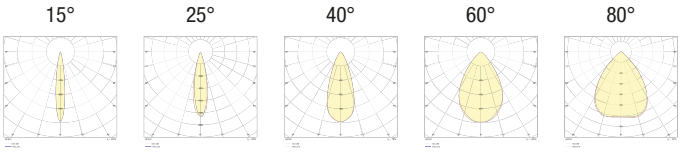


BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR	CABLE
S31.	**A** H 90mm **B** H 180mm **C** H 290mm **D** H 470mm **E** H 760mm	**1** White **2** Matt black **5** Gloss aluminium **7** Brushed aluminium **8** Gold leaf **9** Bond Copper	**15** 15° **25** 25° **40** 40° **60** 60° **80** 80°	**AM** "Wine" Amber Approved by C I V C	**T** Transparent **B** White **N** Black **R** Red

Code example:
CISO S31 SUSPENSION LIGHT + H470mm + White + 15° light beam + “Wine” Amber + Black fabric cable = **Code: S31.D115AMN**

CISO S33 PENDANT LIGHT

S33.

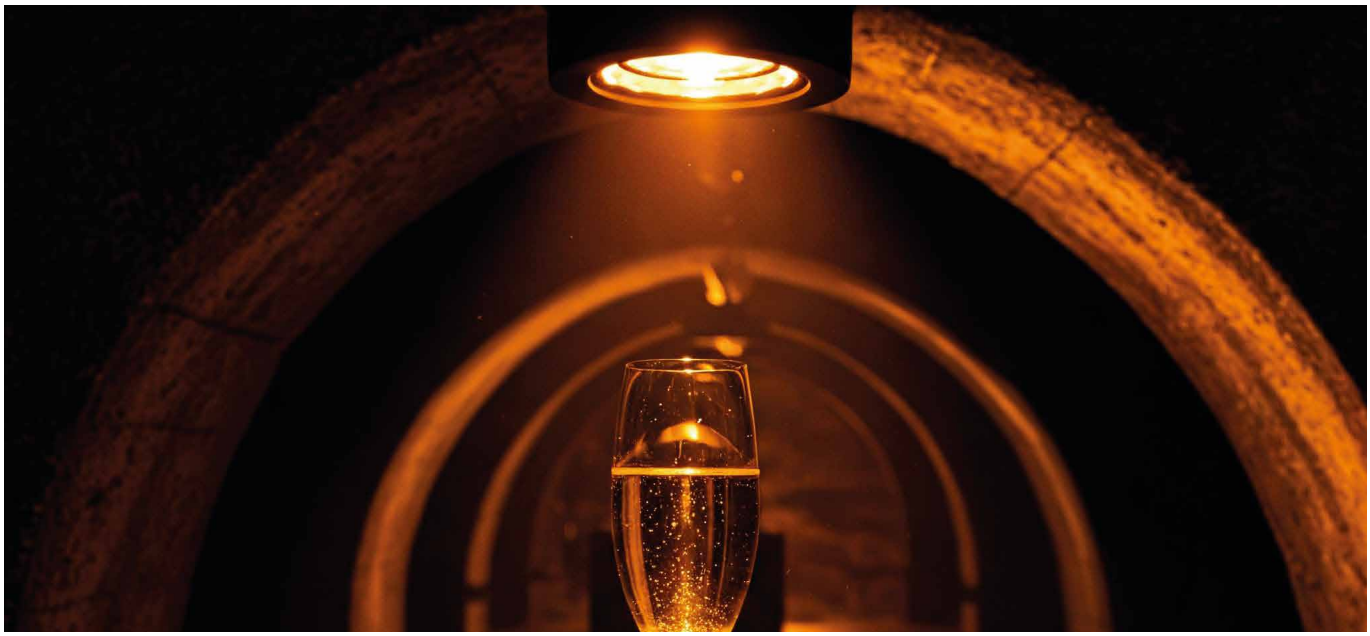


Ø32mm decorated aluminium cylinder suspended light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

Power LED CRI>80
Power: 3,6W@500mA
Lumen: 210Lm@500mA
500mA constant current power supply
Power supply included and integrated



MADE IN ITALY








BASIC CODES	SIZE	FINISHES	LIGHT BEAM	LED COLOUR	CABLE
S33.	**A** H 90mm	**1** White	**15** 15°	**AM** "Wine" Amber	**T** Transparent
	B H 180mm	**2** Matt black	**25** 25°	Approved by C I V C	**B** White
	C H 290mm	**5** Gloss aluminium	**35** 35°		**N** Black
	D H 470mm	**7** Brushed aluminium			**R** Red
	E H 760mm	**8** Gold leaf			
		9 Bond Copper			

Code example:
CISO S33 SUSPENSION LIGHT + H470mm + White + 35° light beam + “Wine” Amber + Black fabric cable = **Code: S33.D135AMN**

CEILING ROSES FOR OTHER CISO COMPOSITIONS




BASIC CODES

S31.F1.

FINISHES

- **1** White
- **2** Matt black
- **5** Gloss aluminium
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

Ø50 mm decorated aluminium ceiling rose for fixing CISO S31, S33, S50 and S80 suspension lights onto plasterboard. Flush-mounted with springs.

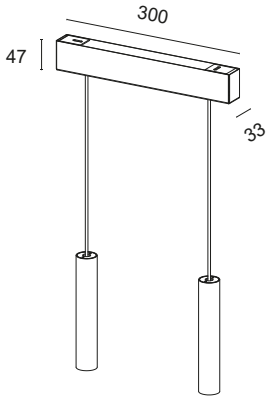


BASIC CODES

RM0300.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

300 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.
Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose.
N.B. Drilling and number of suspended lights to be defined when ordering.

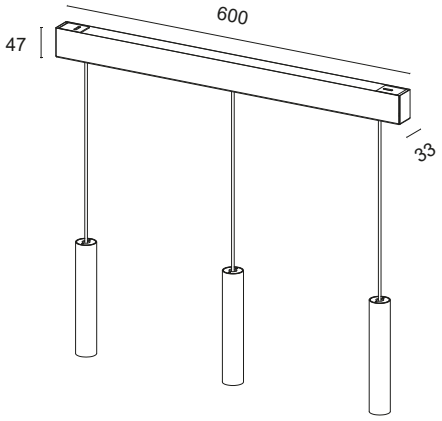


BASIC CODES

RM0600.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

600 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.
Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose.
N.B. Drilling and number of suspended lights to be defined when ordering.

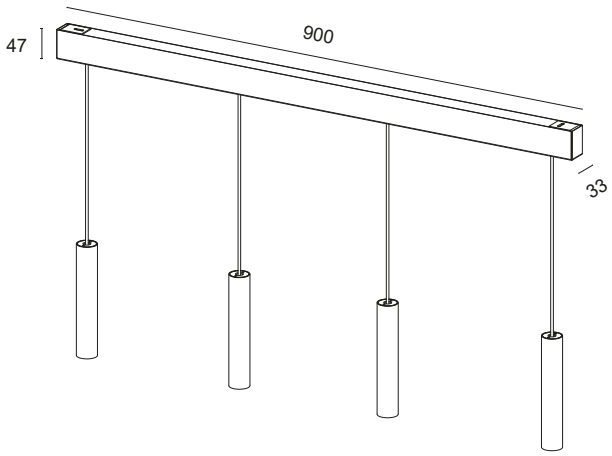

BASIC CODES

RM0900.

FINISHES

- **1** White
- **2** Matt black
- **7** Brushed aluminium
- **8** Gold leaf
- **9** Bond Copper

900 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions.
Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose.
N.B. Drilling and number of suspended lights to be defined when ordering.

Code example:
300mm Ceiling Rose + White = **Code: RM0300.1**




INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK 62
ACSO SERIES FORMWORK 62
ACSO SERIES RING 62
DEHO AND DARDO FORMWORK 63
DEHO AND DARDO SERIES RING 63
DUVAR BASE AND STAKE 63


HOLLY, HALISSA AND MEMO FORMWORK

Thermoplastic formwork for HOLLY, HALISSA and MEMO series models for use during installation.
Can be installed in brick walls or floors. Necessary for correct installation.


548/20








Position the formwork flush with the wall or floor.



Fix the formwork with glue or putty and level it flush with the wall or floor. Prevent foreign bodies from entering the formwork.





Connect the electricals as stipulated in the product sheet and check it works correctly. Insert the product into the formwork using light pressure.


ACSO SERIES FORMWORK

Thermoplastic formwork for ACSO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.

548/80

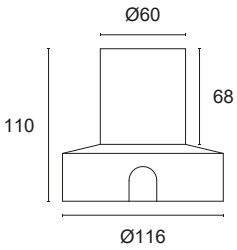

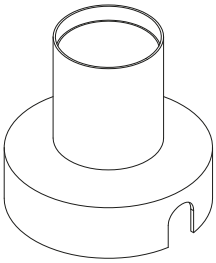




Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.



Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.





After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.


ACSO SERIES RING

Aluminium ring for ACSO series models for use during flush fitting in plasterboard.


TES0065








Place the ring in the spotlight.



Secure the ring with the supplied grub screws.





Drill the plasterboard to the indicated size and insert the spotlight into the hole.


DEHO AND DARDO FORMWORK

Thermoplastic formwork for DEHO and DARDO series models for use during installation.
Can be installed in brick walls or floors. Necessary for correct installation.


548/40

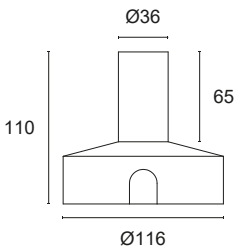

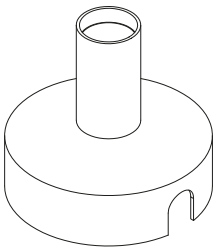




Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.



Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.




After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.


DEHO AND DARDO SERIES RING

Aluminium ring for DEHO and DARDO series models for use during flush fitting in plasterboard.


TNI0076








Place the ring in the spotlight.



Secure the ring with the supplied grub screws.





Drill the plasterboard to the indicated size and insert the spotlight into the hole.

DUVAR BASE AND STAKE

Mounting systems for DUVAR projector, necessary for correct installation.


TES0039




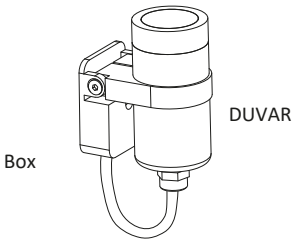

Fixing base

PDH235

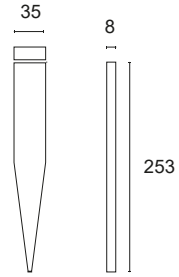

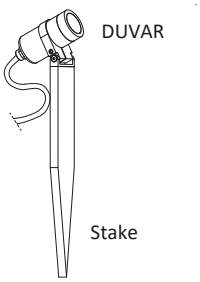

Fixing stake





NANOLED LIGHTING

It is a brand of Tecnocavi Service srl
61021 Carpegna (PU) via Pian dei Roghi, 32
Tel. + 39 0722 77418
www.nanoledlighting.com

CONTACTS

Information office
info@nanoledlighting.com

Federico Francioni
Owner and Sales Manager
federico@nanoledlighting.com

Francesco Francioni Jr.
Italy Sales
commerciale@nanoledlighting.com

Fabrizio Francioni
Owner and Production and Procurement Manager
fabrizio@nanoledlighting.com

Francesco Francioni
Owner and General Management
francesco@nanoledlighting.com

Francesca Severi
Head of Administration
amministrazione@nanoledlighting.com

Remo Giuliani
Technical and design office
tecnico@nanoledlighting.com

WINE AND CHAMPAGNE COLLECTION CATALOGUE Ed. 01

Graphic design and realisation: Team Nanoled Lighting

Tecnocavi Service S.r.l. accepts no liability for printing errors, measurements and technical data. The company reserves the right to make changes to the products illustrated, at any time, without prior notice. Unauthorised reproduction or copying is prohibited.

nanoled

LIGHTING