

# Wine and Champagne Collection







**NANOLED LIGHTING**

It is a brand of Tecnocavi Service srl  
61021 Carpegna (PU) via Pian dei Roghi, 32  
Tel. + 39 0722 77418  
[info@nanoledlighting.com](mailto:info@nanoledlighting.com)  
[www.nanoledlighting.com](http://www.nanoledlighting.com)

NANOLED LIGHTING has dedicated a series of specific and approved products for proper storage to the fascinating world of wine and champagne. Exposure to light has always conditioned the life of wine, from its birth, on the rows of vines, to the bottle. The light spectrum interacts directly with all the cells and atoms that make up matter. This process is triggered by both visible light, which are the colours of the spectrum that we see, and invisible light, of which UV (ultraviolet) and IR (infrared) are part.


Since ancient times, mankind has known that prolonged exposure of wine to light is harmful and conservation methods have always taken this into account. Closed amphorae were used, perhaps buried or kept in the cellar, as in the present day. The study of the colour of the bottles is also very wide-ranging; there are transparent, yellow, green and amber bottles. This means that knowledge and technique have made many steps forward and the quality of the wines on offer has increased a lot, so innovative solutions in production, distribution and storage have been devised.

Important studies by oenologists and specialists have highlighted a defect that emerges when wines, especially whites or rosés, produced with the classic or champenoise method are exposed to light. This phenomenon is also known as 'Light Strike' or 'Goût de Lumière' in French and gives champagne and wine an unpleasant smell and aftertaste that tastes like wool or boiled cabbage. The cause is the alteration of riboflavin and amino acids in wines exposed to light, which compromises the taste of important products from the Collio, Franciacorta, Langhe Piemontese and especially French wines from the Champagne production area (Montagne de Reims, Côte des Bacs, Vallée de la Marne, Côte de Sézanne and Aube).

The only solution is to prevent "Taste of Light" through proper storage in well-lit cellars or rooms. The Comité Interprofessionnel du vin de Champagne (CIVC), following photometric tests that completely exclude the photometric spectrum harmful to wine, has declared NANOLED LIGHTING's "AMBRA VINO LEDs" compliant.

NANOLED LIGHTING has selected a collection of products to be included in specific and especially correct projects and installations for the storage and tasting of champagne and wine.

You will find our AMBRA VINO LED symbol next to each product in the Lighting Catalogue 2025 Ed.02 and on [www.nanoledlighting.com](http://www.nanoledlighting.com)



AMBRA VINO LED  
Compliant with the standards of the  
Comité Interprofessionnel du vin de Champagne  
(CIVC)



# INDEX BY PRODUCT FAMILY

## MICROSPOT

HALLEY	12
--------	----

## INDOOR FLUSH FITTINGS

MINI VESTA	16
EOS	17
EOS Q	18
EOS CEILING LIGHT	19
EOS METAL	20
EOS METAL Q	21
BASIK 1	22
BASIK Q	23
BIONIK 1	24
BIONIK Q	25
FOUR HOLE	26
FOUR HOLE Q	27

## INDOOR AND OUTDOOR RECESSED LIGHTS

HOLLY	30
HALISSA	31
MEMO	32
DEHO 2	33
DEHO 3	34
DEHO 4	35
DEHO 5	36
DEHO Q	37
DARDO 2	38
DARDO 3	39
DARDO Q	40
ACSO 1	41
ACSO 2	42
ACSO 3	43

## PROJECTORS

DUVAR	46
VERTIGO	47
ZEPPELIN	48

## DECORATIVE TECHNICAL LIGHTING

PIXEL 1	52
EVA	53
REM	54
CISO P31 CEILING LIGHT	55
CISO P33 CEILING LIGHT	56
CISO S31 PENDANT LIGHT	57
CISO S33 PENDANT LIGHT	58
CEILING ROSES FOR OTHER CISO COMPOSITIONS	59

## INSTALLATION ACCESSORIES

HOLLY, HALISSA AND MEMO FORMWORK	62
ACSO SERIES FORMWORK	62
ACSO SERIES RING	62
DEHO AND DARDO SERIES FORMWORK	63
DEHO AND DARDO SERIES RING	63
DUVAR BASE AND STAKE	63

# ALPHABETICAL INDEX

<b>A</b>		<b>E</b>	
ACSO 1	41	EOS	17
ACSO 2	42	EOS METAL	20
ACSO 3	43	EOS METAL Q	21
ACSO SERIES FORMWORK	62	EOS CEILING LIGHT	19
ACSO SERIES RING	62	EOS Q	18
<b>B</b>		EVA	53
DUVAR BASE AND STAKE	63	<b>F</b>	
BASIK 1	22	FOUR HOLE	26
BASIK Q	23	FOUR HOLE Q	27
BIONIK 1	24	<b>H</b>	
BIONIK Q	25	HALISSA	31
<b>C</b>		HALLEY	12
CEILING ROSES FOR OTHER CISO COMPOSITIONS	59	HOLLY	30
CISO P31 CEILING LIGHT	55	HOLLY, HALISSA AND MEMO FORMWORK	62
CISO P33 CEILING LIGHT	56	<b>M</b>	
CISO S31 PENDANT LIGHT	57	MEMO	32
CISO S33 PENDANT LIGHT	58	MINI VESTA	16
<b>D</b>		<b>P</b>	
DARDO 2	38	PIXEL 1	52
DARDO 3	39	<b>R</b>	
DARDO Q	40	REM	54
DEHO 2	33	<b>V</b>	
DEHO 3	34	VERTIGO	47
DEHO 4	35	<b>Z</b>	
DEHO 5	36	ZEPPELIN	48
DEHO AND DARDO SERIES FORMWORK	63		
DEHO AND DARDO SERIES RING	63		
DEHO Q	37		
DUVAR BASE AND STAKE	63		
DUVAR	46		

# SYMBOLS



Product compliant with European Electrical Safety Regulations.



Product subject to European WEEE regulations on disposal of items.



Product made with recyclable materials.



Category III Products powered by safety voltage below 50V.



Ingress Production (see below).



Product that can be installed both indoors and outdoors.



Product that can be installed indoors.



Indicates the theoretical weight of the product, without wiring.



Product suitable for mounting on normally flammable surfaces.



It means that the "wine" Amber color avoid the "taste of light". Compliant with the standards of the Comité Interprofessionnel du vin de Champagne (CIVC) for the lighting of cellars, storage rooms and furnishings.



Product that can be inserted in furniture.



Indicates that the product can be walked on.



Indicates the type of optics (symmetrical or asymmetrical) and the degrees of aperture.



Size of hole to be drilled for mounting without formwork.



Indicates that the product can be dimmed.



Class I. Lighting system with earthing device.



Category II Lighting system with reinforced or double insulation, without earthing device.



Can be switched on by touching the metal surface.



Compliance with the RoHs Directive 2002/95/EC that bans the use of hazardous substances in electrical and electronic equipment (lead, mercury, etc.)

## INGRESS PROTECTION

### IP..

The 'resistance' offered by the device to penetration by solids and liquids is indicated by the prefix IP (international protection) followed by two significant numbers. The first number identifies the degree of protection against the ingress of solids. The second number identifies the degree of protection against the ingress of liquids.

**IP0.** Unprotected.

**IP1.** Protected against a solid object greater than 50 mm.

**IP2.** Protected against a solid object greater than 12 mm.

**IP3.** Protected against a solid object greater than 2.5 mm.

**IP4.** Protected against a solid object greater than 1 mm.

**IP5.** Protected against ingress of dust.

**IP6.** Completely protected against ingress of dust.

**IP0** Unprotected.

**IP1** Protected against vertical dripping water.

**IP2** Protected against vertical dripping water when tilted up 15°.

**IP3** Protected against rain.

**IP4** Protected against vertical splashing.

**IP5** Protected against jets of water.

**IP6** Protected against waves.

**IP7** Protected against effects from temporary immersion.







# MICROSPOT

HALLEY ..... 12

# HALLEY

## L31.



Flush-fitted in polished aluminium for accent, decoration and courtesy lighting. Also indicated for 'starry sky'. Choice of secondary optics, can be installed indoors and outdoors if partially protected, spring-mounted.

Power LED CRI>80

Power: 0,8W@350mA



Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

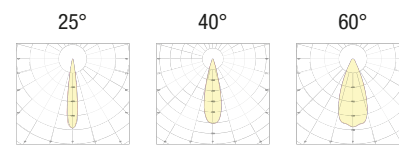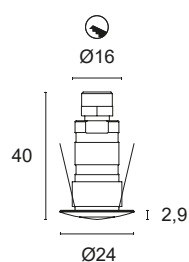

### BASIC CODES

**L31.**

### FINISHES

- 1 White
- 2 Matt black
- 6 Chrome
- 7 Brushed aluminium

### LIGHT BAND

- 25 25°
- 40 40°
- 60 60°

### LED COLOUR

- AM** "Wine" Amber



Code example:

HALLEY + White + 40° light beam + "Wine" Amber = Code: L31.140AM





## INDOOR FLUSH FITTINGS

MINI VESTA .....	16
EOS .....	17
EOS Q .....	18
EOS CEILING LIGHT .....	19
EOS METAL .....	20
EOS METAL Q .....	21
BASIK 1 .....	22
BASIK Q .....	23
BIONIK 1 .....	24
BIONIK Q .....	25
FOUR HOLE .....	26
FOUR HOLE Q .....	27

# MINI VESTA

## L9X.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Diffuse lighting, can be installed indoors, pressure-mounted.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA



Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

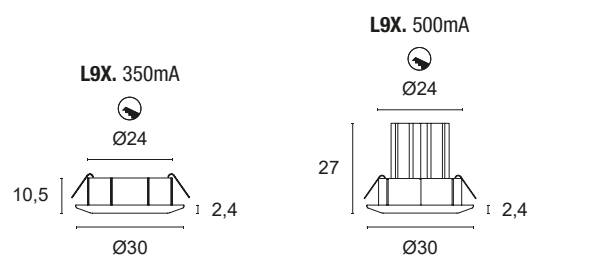

### BASIC CODES

**L9X.**

### FINISHES

- 1 White
- 6 Chrome
- 7 Brushed aluminium
- 8 Transparent

### LIGHT BAND

- 00 120°

### LED COLOUR

- AM "Wine" Amber
-  Approved by CIVC

### POWER

- 3** 1x0.8W - 350mA - 50 lm
- 5** 1x1,2W - 500mA - 70 lm

Code example:

MINI VESTA + White + 120° light beam + "Wine" Amber + 0,8W = Code: L9X.100AM3



# EOS

## L95.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA

Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply




Series connection, 50 cm cable



 **MADE IN ITALY**



**L95. 500mA**

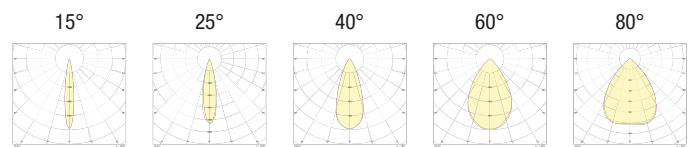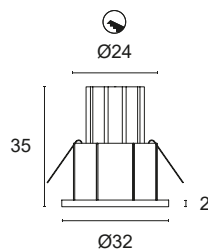

**BASIC CODES**

**L95.**

**FINISHES**

- 1 White
- 2 Matt black
- 3 Brushed gold
- 6 Chrome
- 7 Brushed aluminium
- 8 Transparent
- 9 Polished gold

**LIGHT BAND**

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°

**LED COLOUR**

- AM** "Wine" Amber
-  Approved by CIVC

**POWER**

- 3** 1x0.8W - 350mA - 50 lm
- 5** 1x1,2W - 500mA - 70 lm

Code example:

EOS + Brushed aluminium + 15° light beam + "Wine" Amber + 0,8W = Code: L95.715AM3

# EOS Q

## L9Q.



Flush-fitted in thermoplastic for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, press-fit.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA



Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

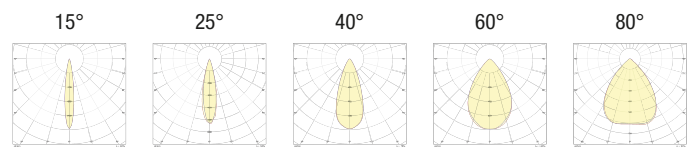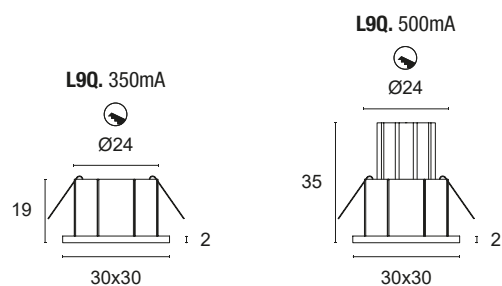

### BASIC CODES

**L9Q.**

### FINISHES

- 1 White
- 2 Matt black
- 3 Brushed gold
- 6 Chrome
- 7 Brushed aluminium
- 8 Transparent
- 9 Polished gold

### LIGHT BAND

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°

### LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

### POWER


- 3** 1x0.8W - 350mA - 50 lm
- 5** 1x1,2W - 500mA - 70 lm

Code example:

EOS Q + Brushed aluminium + 15° light beam + "Wine" Amber + 0,8W = Code: L9Q.715AM3

# EOS CEILING LIGHT

L95D.

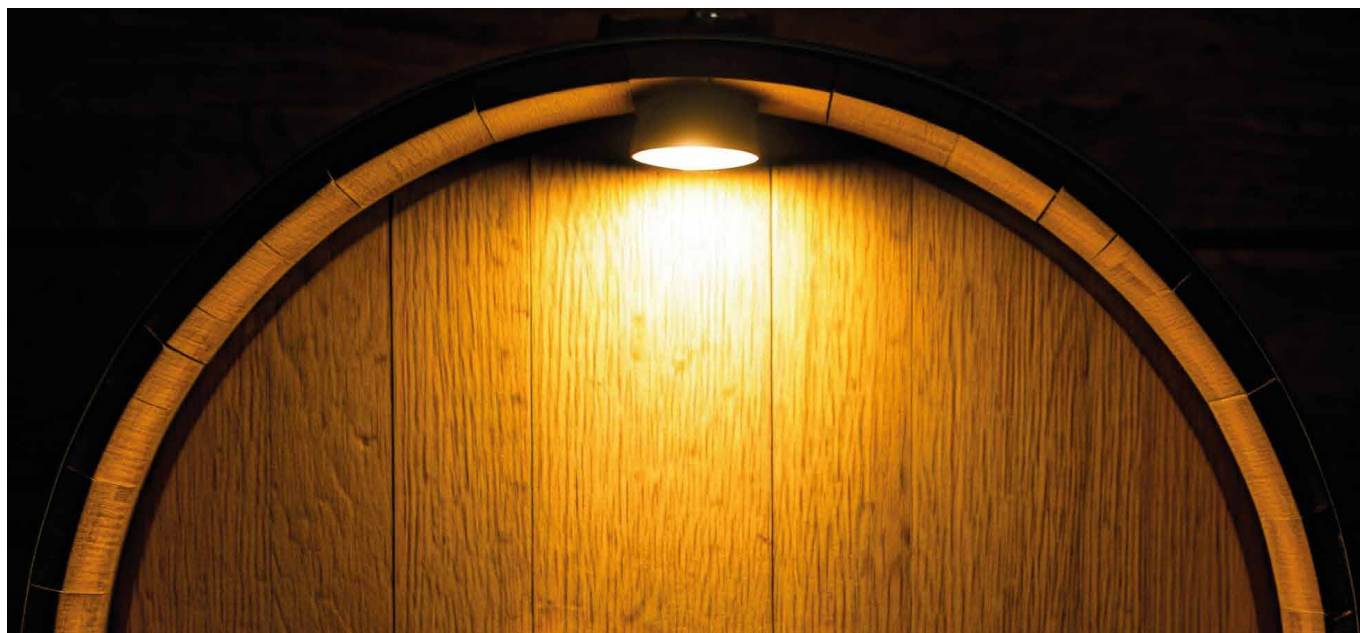

Thermoplastic ceiling light for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, mounting with concealed screws.


Power LED CRI>80

Power: 0,8W@350mA



Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

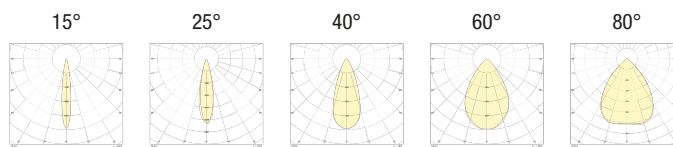

## BASIC CODES

**L95D.**

## FINISHES

- 1 White
- 2 Matt black
- 3 Brushed gold
- 6 Chrome
- 7 Brushed aluminium
- 8 Transparent
- 9 Polished gold

## LIGHT BAND

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°

## LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

Code example:

EOS CEILING LIGHT + Brushed aluminium + 25° light beam + "Wine" Amber = Code: L95D.725AM

# EOS METAL

## L95M.



Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors. Flush-mounted with springs.


Power LED CRI>80

Power: 1,2W@500mA



Lumen: 70Lm@500mA

500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**



### BASIC CODES

**L95M.**

### FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 7 Brushed aluminium

### LIGHT BAND

- 10 10°
- 35 35°
- 60 60°

### LED COLOUR

- AM** "Wine" Amber



Code example:

EOS METAL + Brushed aluminium + 40° light beam + "Wine" Amber = Code: L95M.740AM


# EOS METAL Q

## L9QM.





Flush-fitted in polished aluminium with power LED for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors. Flush-mounted with springs.

Power LED CRI>80  
Power: 1,2W@500mA  
Lumen: 70Lm@500mA  
500mA constant current power supply  
Series connection, 50 cm cable



 **MADE IN ITALY**



### BASIC CODES

**L95QM.**

### FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 7 Brushed aluminium

### LIGHT BAND

- 10 10°
- 35 35°
- 60 60°

### LED COLOUR


- AM** "Wine" Amber
-  Approved by CIVC

Code example:

EOS METAL Q + Brushed aluminium + 40° light beam + "Wine" Amber = Code: L9QM.740AM

# BASIK 1

L01.

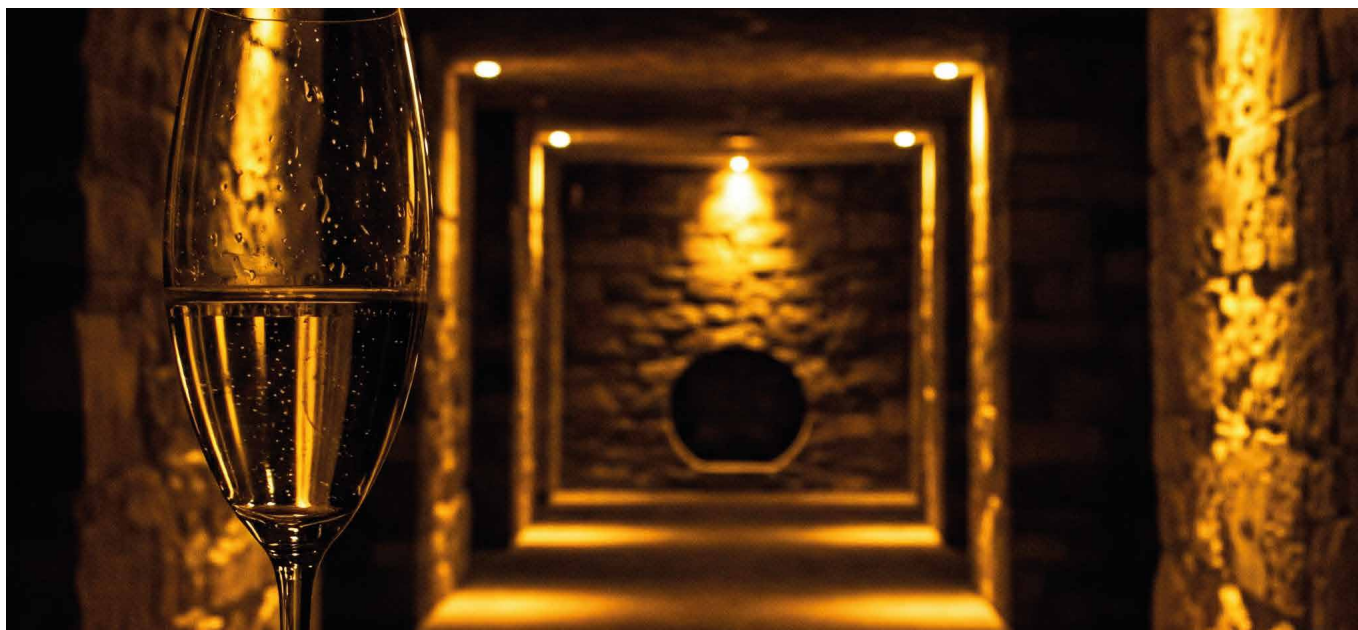

Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.


Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA



Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable

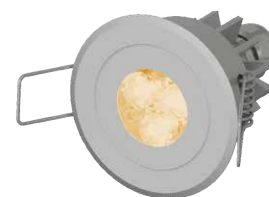

 **MADE IN ITALY**

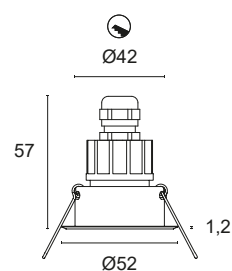

## BASIC CODES

**L01.**

## FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 6 Chrome
- 7 Brushed aluminium

## LIGHT BEAM

- 15 15°
- 25 25°
- 35 35°

## LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

## POWER


- 3** 3x0,8W - 350mA - 150 lm
- 5** 3x1,2W - 500mA - 210 lm

Code example:

BASIK 1 + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L01.715AM3

# BASIK Q

## L02.

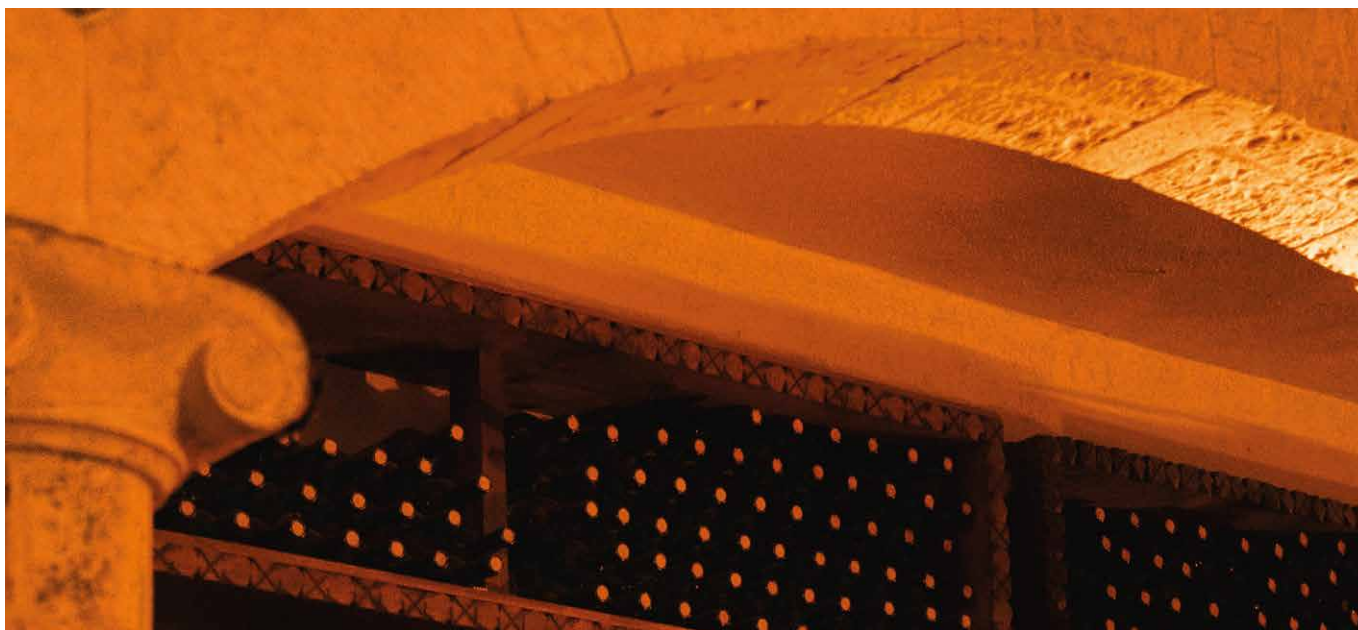

Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.


Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA



Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable

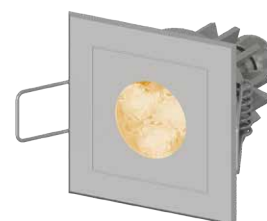

 **MADE IN ITALY**

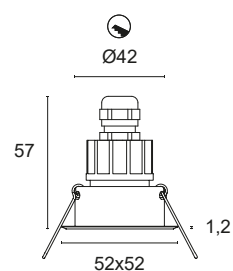

### BASIC CODES

**L02.**

### FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 6 Chrome
- 7 Brushed aluminium

### LIGHT BEAM

- 15 15°
- 25 25°
- 35 35°

### LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

### POWER


- 3** 3x0,8W - 350mA - 150 lm
- 5** 3x1,2W - 500mA - 210 lm

Code example:

BASIK Q + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L02.715AM3

# BIONIK 1

L21.

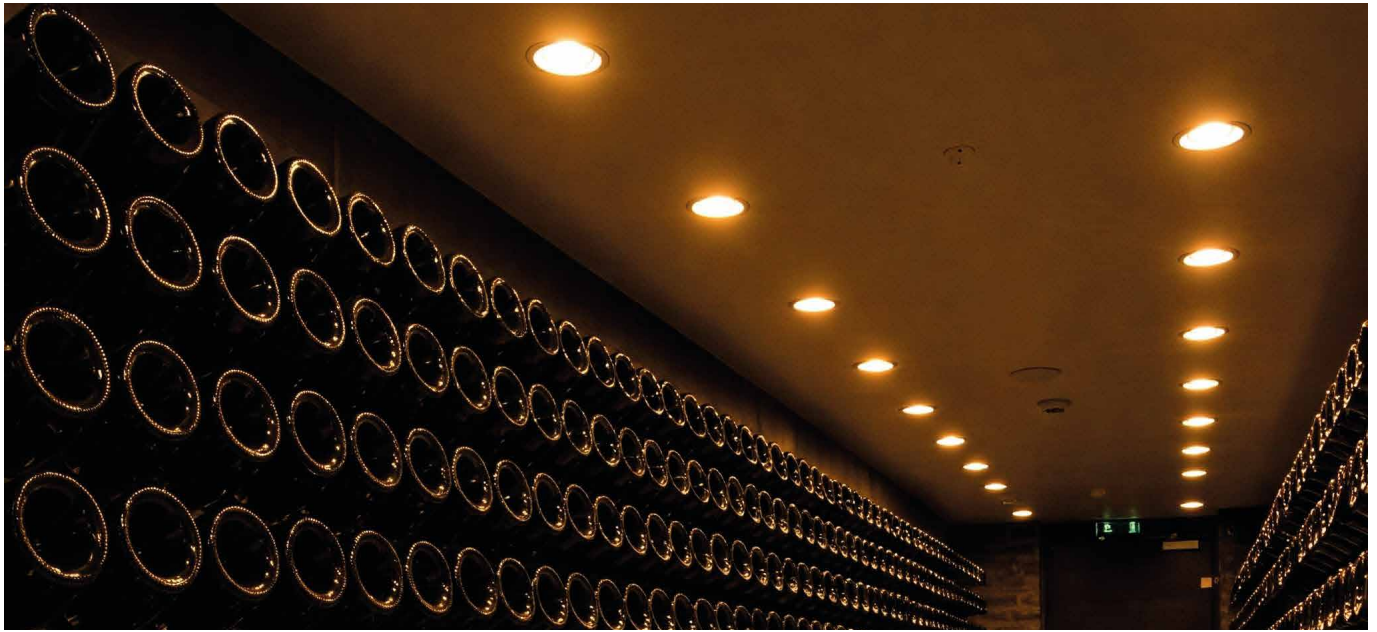

Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA



Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

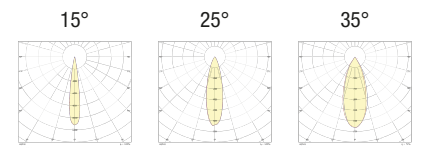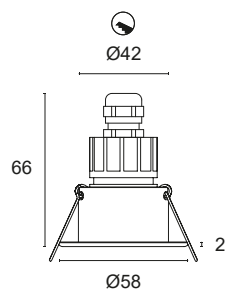

## BASIC CODES

**L21.**

## FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 6 Chrome
- 7 Brushed aluminium

## LIGHT BEAM

- 15 15°
- 25 25°
- 35 35°

## LED COLOUR

- AM "Wine" Amber
-  Approved by CIVC

## POWER

- 3 3x0,8W - 350mA - 150 lm
- 5 3x1,2W - 500mA - 210 lm


Code example:

BIONIK 1 + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L21.715AM3



# BIONIK Q

## L22.

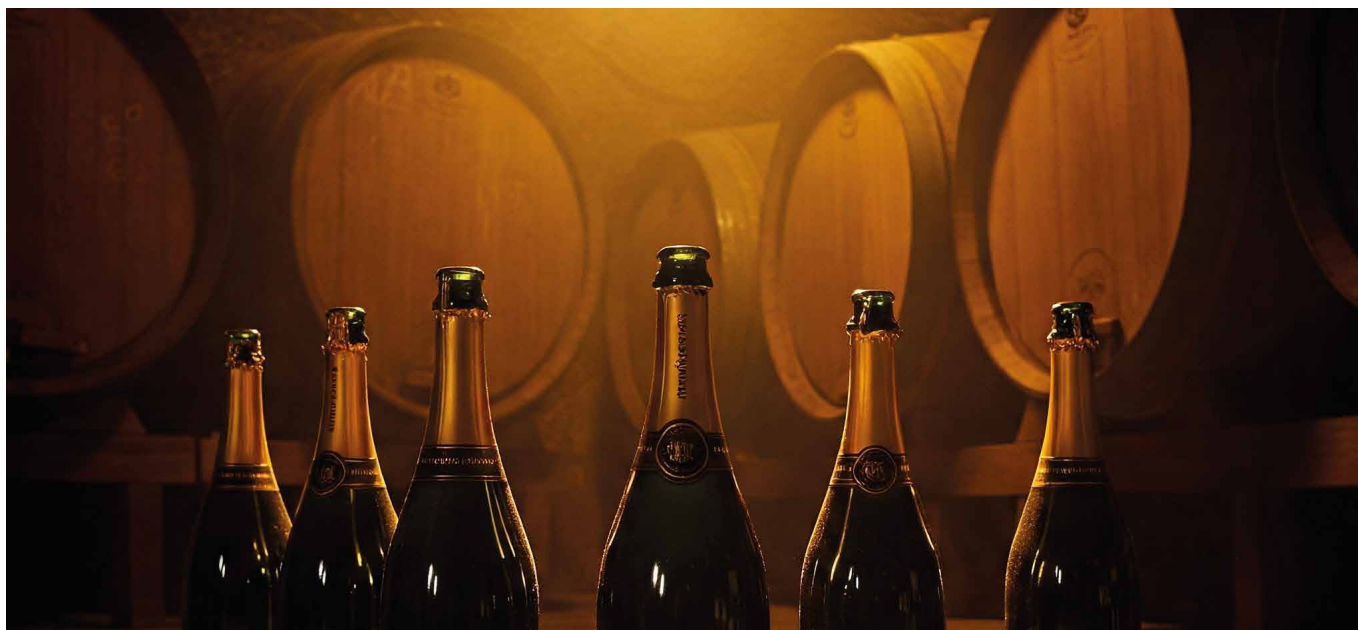

Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors and outdoors if partially protected. Flush-mounted with springs.


Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA



Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable

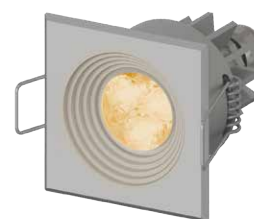

 **MADE IN ITALY**

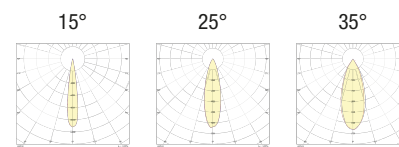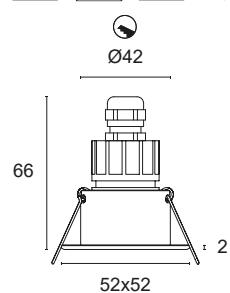

### BASIC CODES

**L22.**

### FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 6 Chrome
- 7 Brushed aluminium

### LIGHT BEAM

- 15 15°
- 25 25°
- 35 35°

### LED COLOUR

- AM "Wine" Amber
-  Approved by CIVC

### POWER


- 3 3x0,8W - 350mA - 150 lm
- 5 3x1,2W - 500mA - 210 lm

Code example:

BIONIK Q + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L22.715AM3

# FOUR HOLE

## L24.

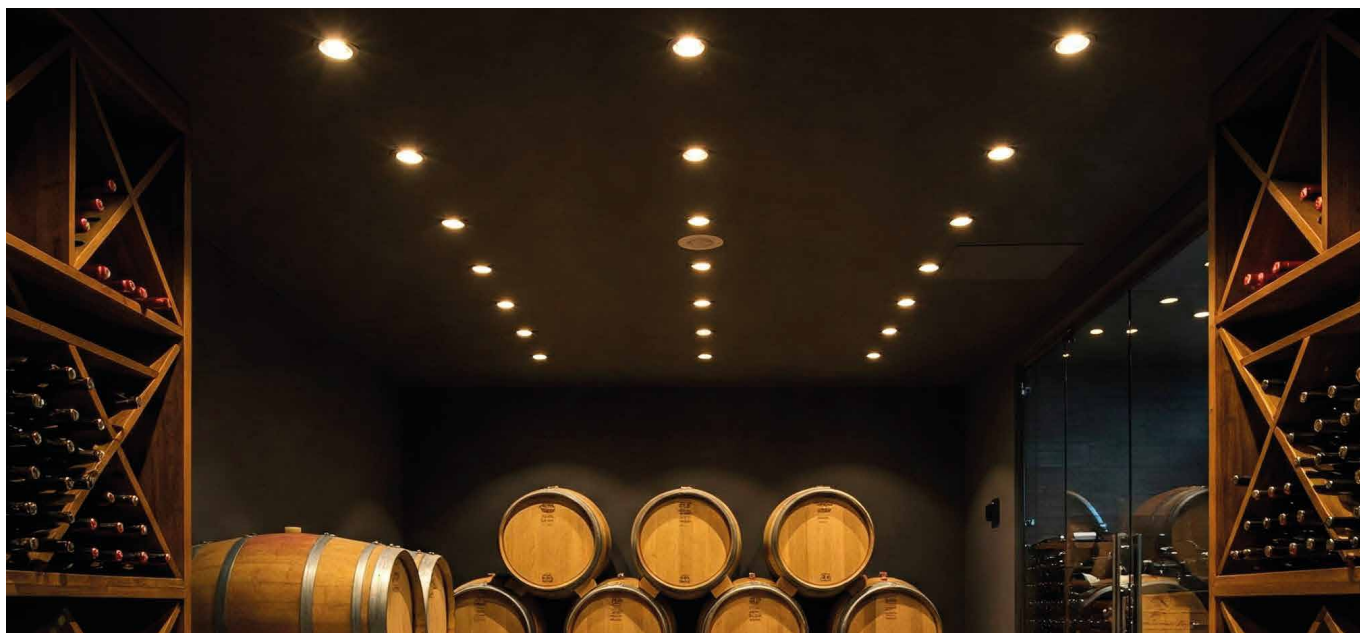

Polished, decorated aluminium recessed light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.


Power LED CRI>80

Power: 3,2W@350mA – 4,8W@500mA



Lumen: 200Lm@350mA – 280Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable

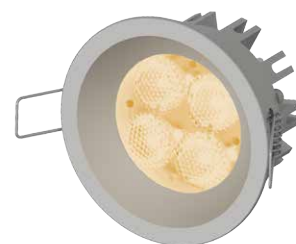

 MADE IN ITALY

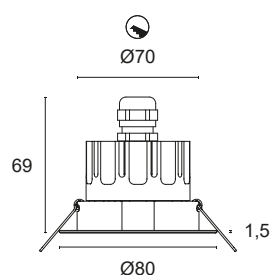

### BASIC CODES

**L24.**

### FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 7 Brushed aluminium

### LIGHT BEAM

- 10 10°
- 35 35°
- 60 60°
- 80 80°

### LED COLOUR

- AM "Wine" Amber
-  Approved by CIVC

### POWER

- 3 4x0,8W - 350mA - 200 lm
- 5 4x1,2W - 500mA - 280 lm

Code example:

FOUR HOLE + White + 80° light beam + "Wine" Amber + 3,2W = Code: L24.180AM3

# FOUR HOLE Q

L25.



Polished, decorated aluminium recessed square light with powerful LEDs suitable for decorative lighting of residential and retail environments. Choice of secondary recessed optics. Can be flush fitted indoors. Flush-mounted with springs.


Power LED CRI>80

Power: 3,2W@350mA - 4,8W@500mA



Lumen: 200Lm@350mA - 280Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable

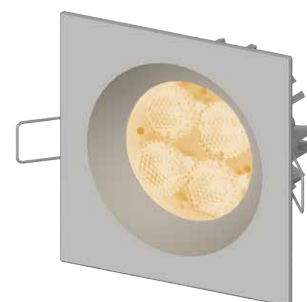

 **MADE IN ITALY**

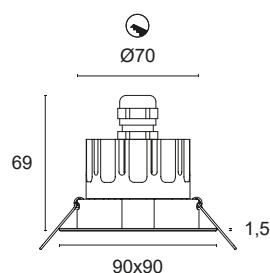

## BASIC CODES

**L25.**

## FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 7 Brushed aluminium

## LIGHT BEAM

- 10 10°
- 35 35°
- 60 60°
- 80 80°

## LED COLOUR

- AM "Wine" Amber
-  Approved by CIVC

## POWER

- 3 4x0,8W - 350mA - 200 lm
- 5 4x1,2W - 500mA - 280 lm

Code example:

FOUR HOLE Q + White + 80° light beam + "Wine" Amber + 3,2W = Code: L25.180AM3




## INDOOR AND OUTDOOR RECESSED LIGHTS

HOLLY	30
HALISSA	31
MEMO	32
DEHO 2	33
DEHO 3	34
DEHO 4	35
DEHO 5	36
DEHO Q	37
DARDO 2	38
DARDO 3	39
DARDO Q	40
ACSO 1	41
ACSO 2	42
ACSO 3	43

# HOLLY

## L30R.


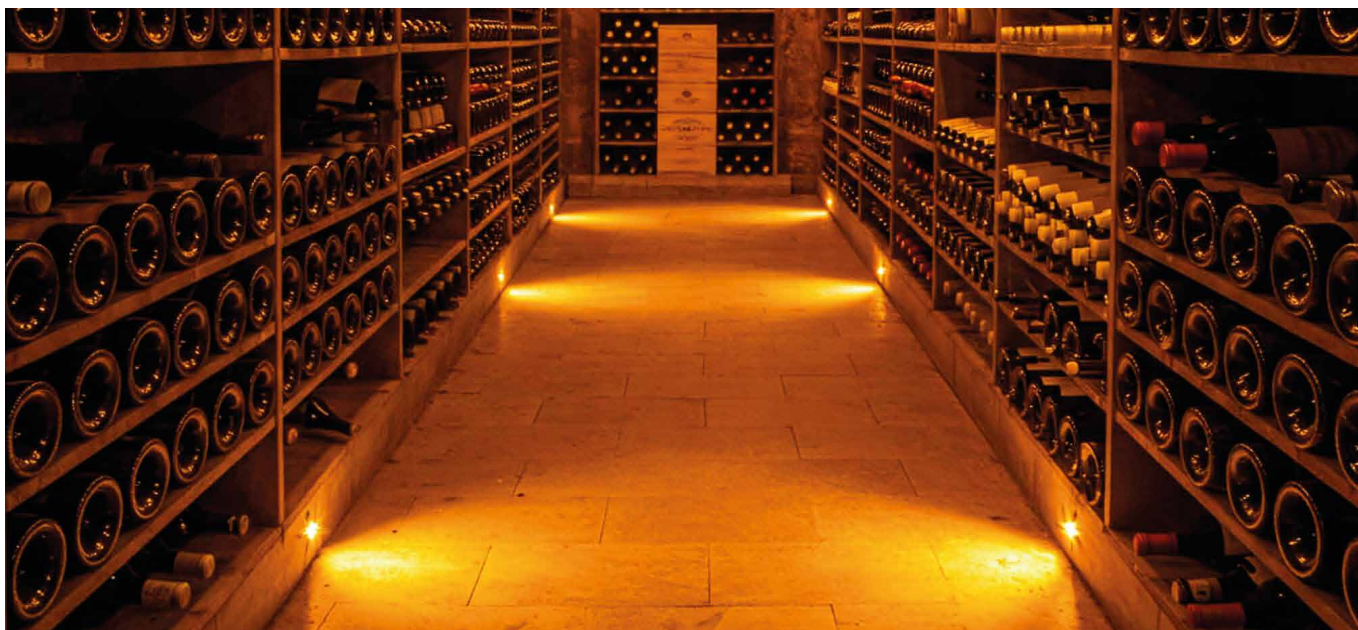


Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork.

Power LED CRI>80  
Power: 0,8W@350mA  
Lumen: 50Lm@350mA  
350mA constant current power supply  
Series connection, 50 cm cable



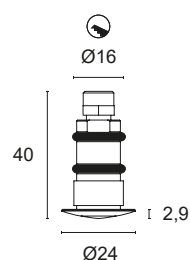


 **MADE IN ITALY**





### BASIC CODES

**L30R.**

### LIGHT BEAM

-  **25** 25°
-  **40** 40°
-  **60** 60°

### GLASS

-  **T** Transparent
-  **S** Brushed

### LED COLOUR

-  **AM** "Wine" Amber


 Approved by CIVC

Code example:

HOLLY + 25° light beam + Transparent glass + "Wine" Amber = Code: L30R.25TAM

# HALISSA

## L30Q.

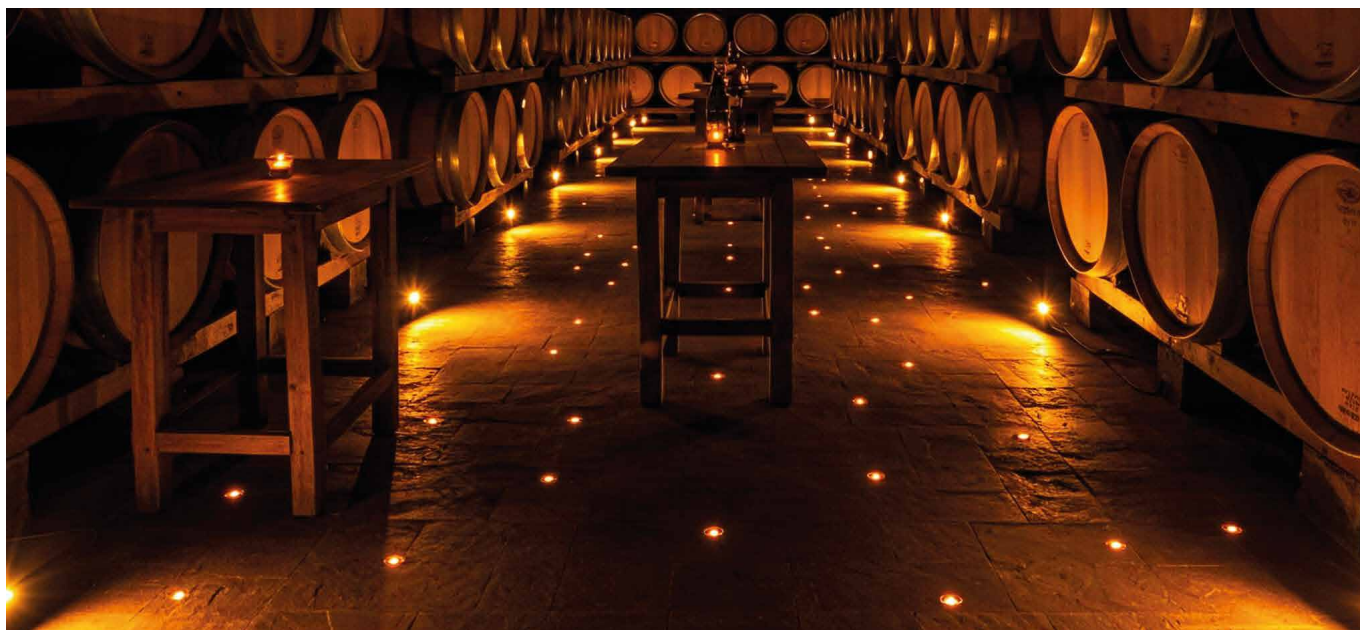

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork.

Power LED CRI>80

Power: 0,8W@350mA



Lumen: 50Lm@350mA

350mA constant current power supply

Series connection, 50 cm cable



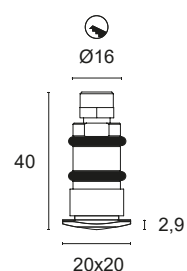


 **MADE IN ITALY**





**BASIC CODES**

**L30Q.**

**LIGHT BEAM**

-  **25** 25°
-  **40** 40°
-  **60** 60°

**GLASS**

-  **T** Transparent
-  **S** Brushed

**LED COLOUR**

-  **AM** "Wine" Amber


 Approved by CIVC

Code example:

HALISSA + 25° light beam + Transparent glass + "Wine" Amber = Code: L30Q.25TAM

# MEMO

## L30S.


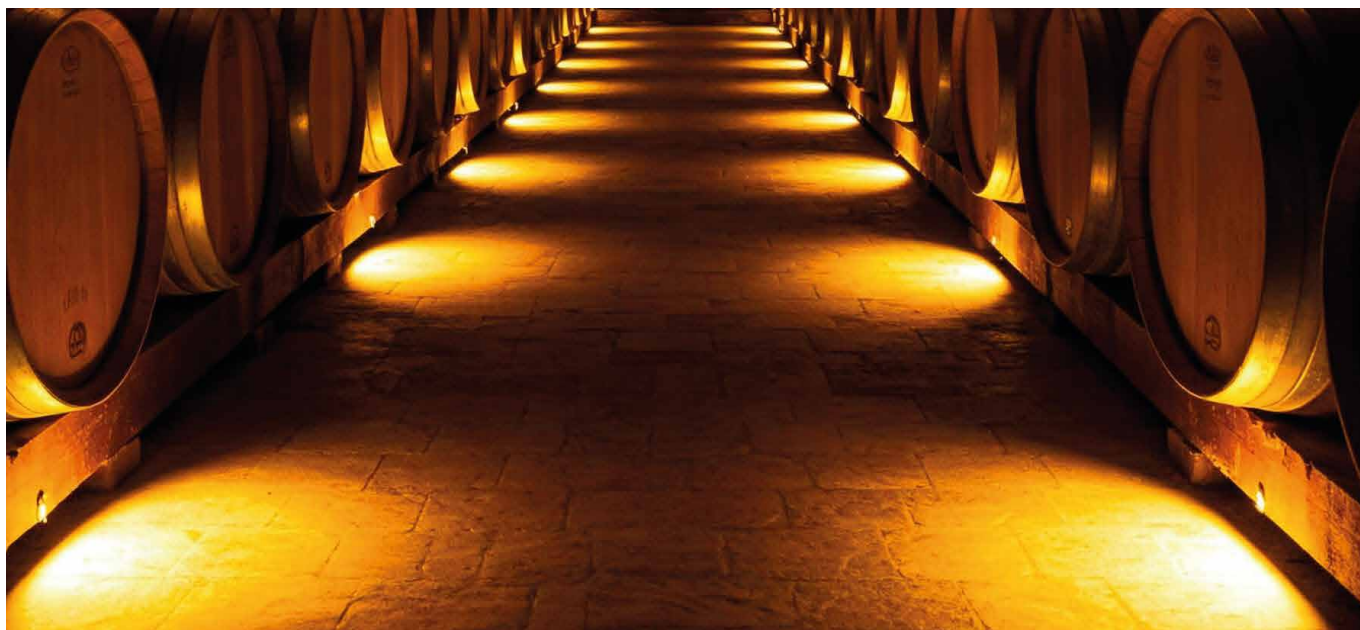


Flush-fitted in polished 304 stainless steel with power LED for decoration, courtesy or step marker lighting. Diffuse lighting with anti-glare cowling. Can be fitted in the wall or floor, indoors and outdoors. Mounting with formwork.

Power LED CRI>80  
Power: 0,8W@350mA  
Lumen: 50Lm@350mA  
350mA constant current power supply  
Series connection, 50 cm cable



 **MADE IN ITALY**

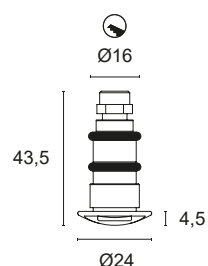

**BASIC CODES**

**L30S.**

**LIGHT BEAM**

 **R1** Radial 1 aperture  **T** Transparent

**GLASS**

**LED COLOUR**

 **AM** "Wine" Amber



Code example:

MEMO + Radial light beam 1 aperture + Transparent glass + "Wine" Amber = Code: L30S.R1TAM



# DEHO 2

## L402.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA



Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable





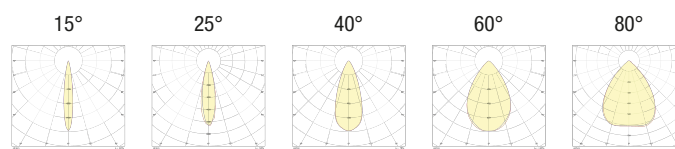


 **MADE IN ITALY**





### BASIC CODES

**L402.**

### LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **40** 40°
-  **60** 60°
-  **80** 80°

### GLASS

-  **T** Transparent
-  **S** Brushed

### LED COLOUR

-  **AM** "Wine" Amber
-  Approved by CIVC

### POWER


- 3** 1x0,8W - 350mA - 50 lm
- 5** 1x1,2W - 500mA - 70 lm

Code example:

DEHO 2 + 25° light beam + Transparent glass + "Wine" Amber + 0,8W = Code: L402.25TAM3

# DEHO 3

## L403.

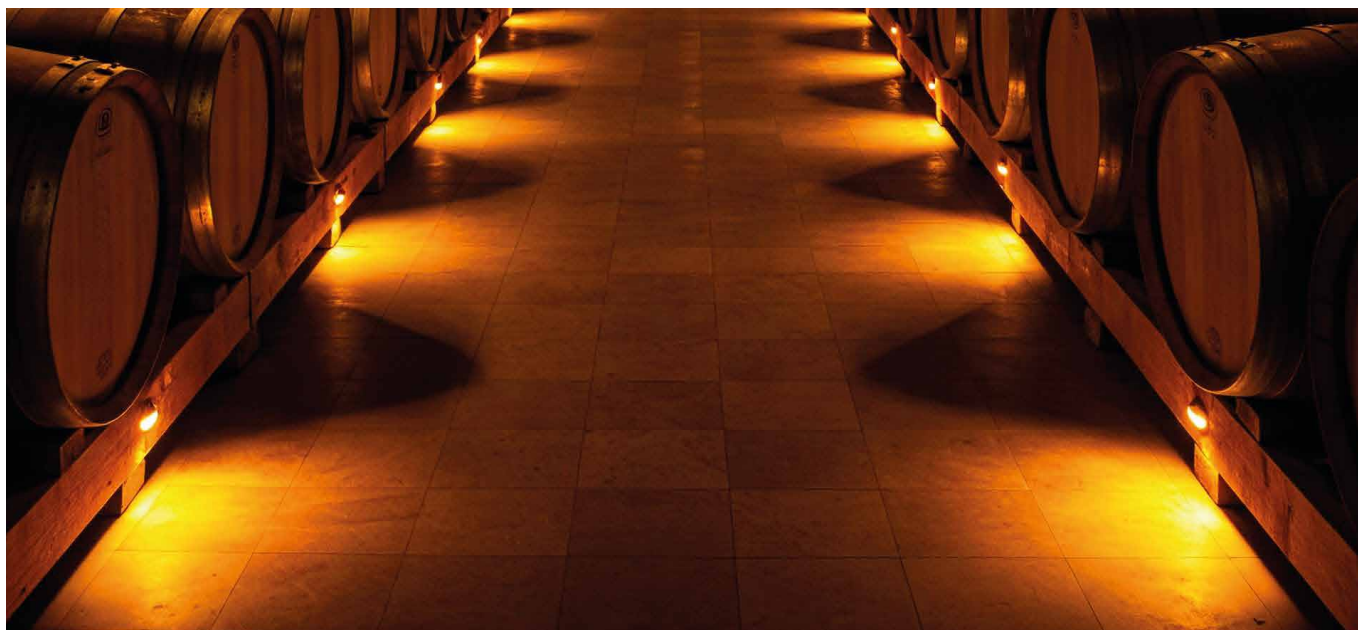

Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA


Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

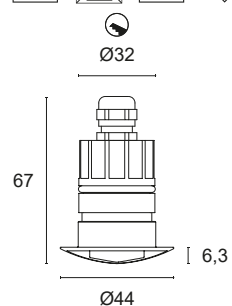

BASIC CODES

**L403.**

LIGHT BEAM

 **R1** Radial 1 aperture

LED COLOUR

 **AM** "Wine" Amber



POWER

**3** 1x0,8W - 350mA - 50 lm

**5** 1x1,2W - 500mA - 70 lm

Code example:

DEHO 3 + Radial light beam 1 aperture + "Wine" Amber + 0,8W = Code: L403.R1AM3

# DEHO 4 L404.



Flush-fitted in polished 304 stainless steel for accent, decoration, courtesy or step marker lighting. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA


Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

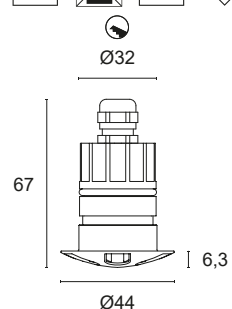

BASIC CODES

**L404.**

LIGHT BEAM

 **R5** Radial 5 apertures

LED COLOUR

 **AM** "Wine" Amber



POWER

**3** 1x0,8W - 350mA - 50 lm


**5** 1x1,2W - 500mA - 70 lm

Code example:

DEHO 4 + Radial light beam 5 apertures + "Wine" Amber + 0,8W = Code: **L404.R5AM3**

# DEHO 5

## L402B

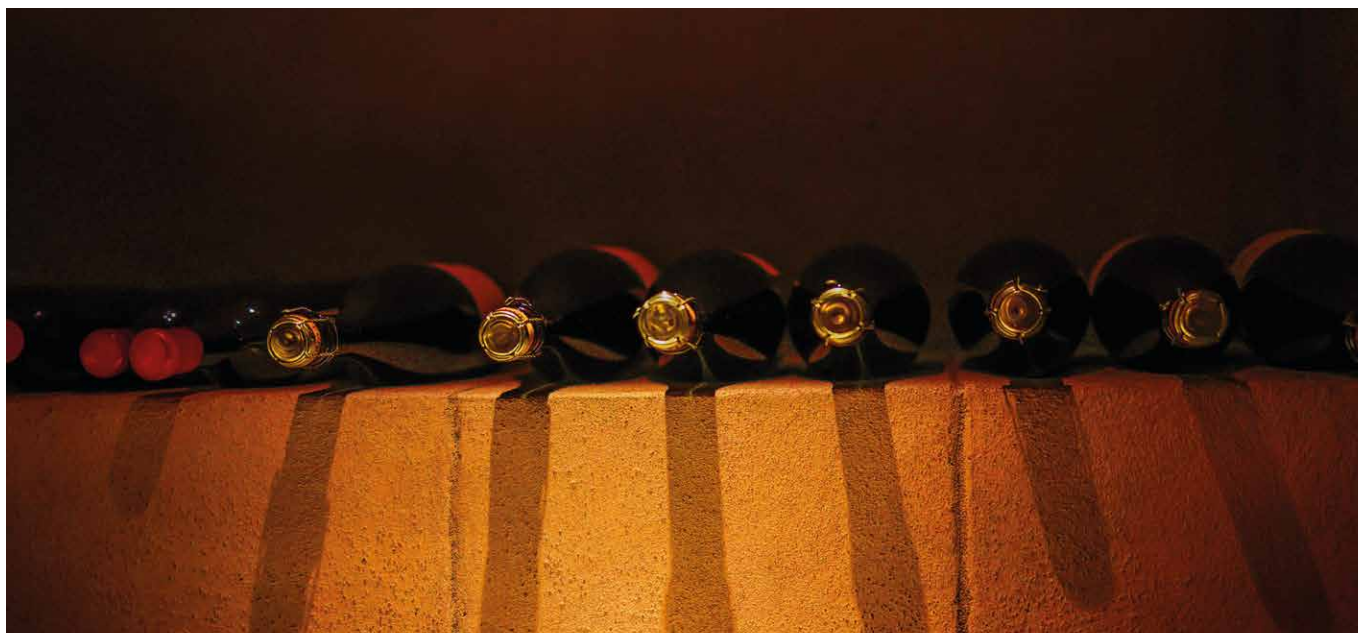

Flush-fitted in polished 304 stainless steel for decoration, courtesy and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA


Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**



**BASIC CODES**

**L402B.**

**LIGHT BEAM**

 **R2** Radial 2 apertures

**LED COLOUR**

 **AM** "Wine" Amber



**POWER**

**3** 1x0,8W - 350mA - 50 lm

**5** 1x1,2W - 500mA - 70 lm

Code example:

DEHO 5 + Radial light beam 2 apertures + "Wine" Amber + 0,8W = Code: L402B.R2AM3

# DEHO Q

## L405.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA



Lumen: 50Lm@350mA - 70Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable





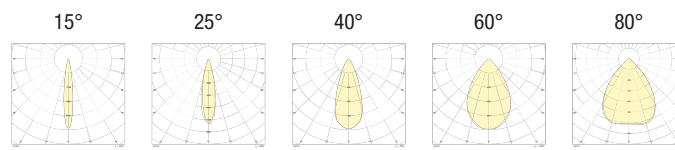


 **MADE IN ITALY**





### BASIC CODES

**L405.**

### LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **40** 40°
-  **60** 60°
-  **80** 80°

### GLASS

-  **T** Transparent
-  **S** Brushed

### LED COLOUR

-  **AM** "Wine" Amber
-  Approved by CIVC

### POWER


- 3** 1x0,8W - 350mA - 50 lm
- 5** 1x1,2W - 500mA - 70 lm

Code example:

DEHO Q + 25° light beam + Transparent glass + "Wine" Amber + 0,8W = Code: L405.25TAM3

# DARDO 2

L502.

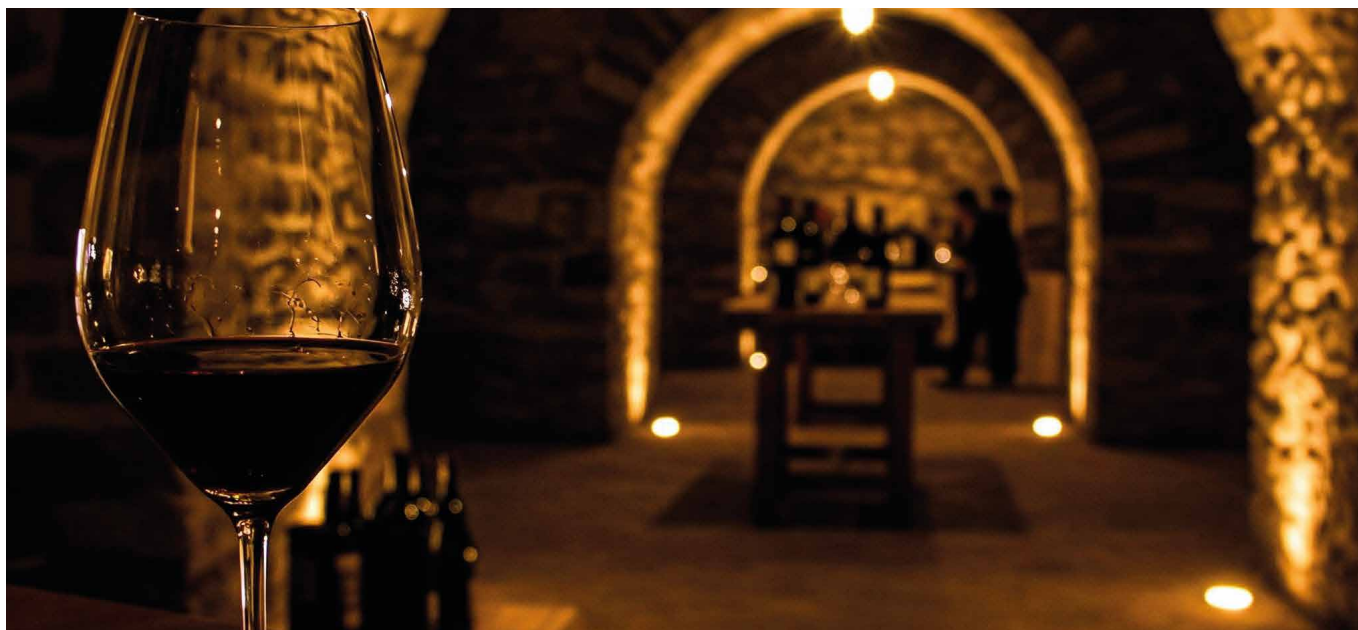

Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA



Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



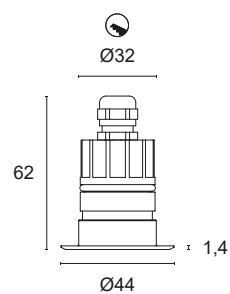


 **MADE IN ITALY**





**BASIC CODES**

**L502.**

**LIGHT BEAM**

-  **15** 15°
-  **25** 25°
-  **35** 35°

**GLASS**

-  **T** Transparent
-  **S** Brushed

**LED COLOUR**

-  **AM** "Wine" Amber
-  Approved by CIVC

**POWER**

- 3** 3x0,8W - 350mA - 150 lm
- 5** 3x1,2W - 500mA - 210 lm

Code example:

DARDO 2 + 15° light beam + Transparent glass + "Wine" Amber + 2,4W = Code: L502.15TAM3

# DARDO 3

L503.



Flush-fitted in polished 304 steel with powerful LEDs suitable for decorative lighting and as step markers. Anti-glare radial diffuser, can be installed indoors and outdoors. Mounting with formwork for brickwork.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA


Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**



BASIC CODES

**L503.**

LIGHT BEAM

 **R5** Radial 5 apertures

LED COLOUR

 **AM** "Wine" Amber



POWER

**3** 3x0,8W - 350mA - 150 lm

**5** 3x1,2W - 500mA - 210 lm

Code example:

DARDO 3 + Radial light beam 5 apertures + "Wine" Amber + 2,4W = Code: L503.R5AM3

# DARDO Q

## L504.



Flush-fitted in polished 304 stainless steel with power LED for accent, decoration, courtesy or step marker lighting. Choice of secondary optics. Can be fitted in the floor, wall or in plasterboard indoors and outdoors. Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA



Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



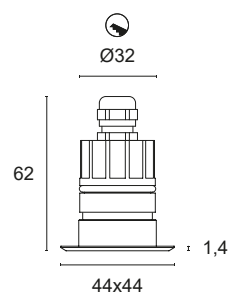

 **MADE IN ITALY**




### BASIC CODES

**L504.**








### LIGHT BEAM

-  **15** 15°
-  **25** 25°
-  **35** 35°

### GLASS

-  **T** Transparent
-  **S** Brushed

### LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber



Approved by  
CIVC

### POWER

- 3** 3x0,8W - 350mA - 150 lm
- 5** 3x1,2W - 500mA - 210 lm

Code example:

DARDO Q + 15° light beam + Transparent glass + "Wine" Amber + 2,4W = Code: L504.15TAM3



# ACSO 1

## L601.



Polished 304 steel recessed light with power LEDs for primary floor lighting of green areas and architectural facades.  
Choice of secondary optics. Can be flush fitted indoors and outdoors  
Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 3,2W@350mA - 4,8W@500mA



Lumen: 200lm@350mA - 280lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable





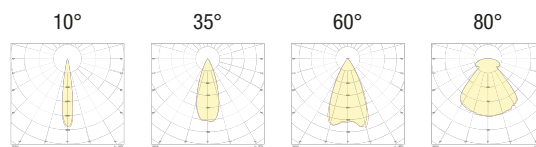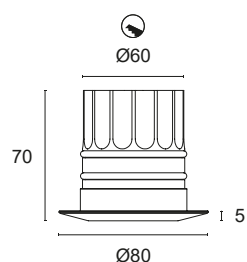

 **MADE IN ITALY**





### BASIC CODES

**L601.**

### LIGHT BEAM

-  **10** 10°
-  **35** 35°
-  **60** 60°
-  **80** 80°

### GLASS

-  **T** Transparent
-  **S** Brushed

### LED COLOUR

-  **AM** "Wine" Amber
-  Approved by CIVC

### POWER

- 3** 4x0,8W - 350mA - 200 lm
- 5** 4x1,2W - 500mA - 280 lm

Code example:

ACSO 1 + 35° light beam + Transparent glass + "Wine" Amber + 3,2W = Code: L601.35TAM3

# ACSO 2

L602.



Flush-fitted in polished 304 stainless steel with power LED for accent and step marker lighting. Opal diffuser. Can be fitted in the floor or on the wall indoors and outdoors, mounting with formwork.

Power LED CRI>80

Power: 3,2W@350mA - 4,8W@500mA


Lumen: 200lm@350mA - 280lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

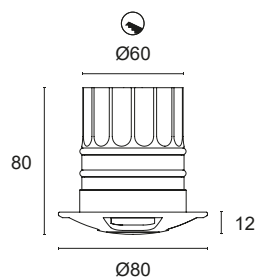

**BASIC CODES**

**L602.**

**LIGHT BEAM**

 **R4** Radial 4 apertures

**LED COLOUR**

 **AM** "Wine" Amber



**POWER**

**3** 4x0,8W - 350mA - 200 lm

**5** 4x1,2W - 500mA - 280 lm

Code example:

ACSO 2 + Radial light beam 4 apertures + "Wine" Amber + 3,2W = Code: L602.R4AM3

# ACSO 3

## L603.



Flush-fitted in polished 304 stainless steel with power LED for accent or step marker lighting. Asymmetrical optics. Can be fitted in the floor indoors and outdoors, mounting with formwork.


Power LED CRI>80

Power: 0,8W@350mA - 1,2W@500mA



Lumen: 50lm@350mA - 70lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable

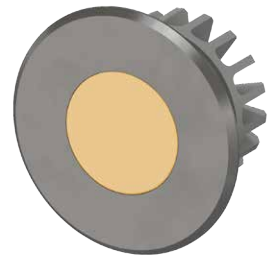


 **MADE IN ITALY**



**BASIC CODES**

**L603.**

**LIGHT BEAM**

 **40** 40° Asymmetric

**GLASS**

 **T** Transparent

**LED COLOUR**

 **AM** "Wine" Amber

 Approved by CIVC

**POWER**

**3** 1x0,8W - 350mA - 50 lm

**5** 1x1,2W - 500mA - 70 lm

Code example:

ACSO 3 + 40° light beam + Transparent glass + "Wine" Amber + 0,8W = Code: L603.40AMC3



## PROJECTORS

DUVAR .....	46
VERTIGO .....	47
ZEPPELIN .....	48

# DUVAR

## L23.



Directional projector in anticorrosion anodised or decorated aluminium with power LED source. Suitable for decorative, accent, courtesy and general lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base or stake.

Power LED CRI>80

Power: 2,4W@350mA - 3,6W@500mA



Lumen: 150Lm@350mA - 210Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

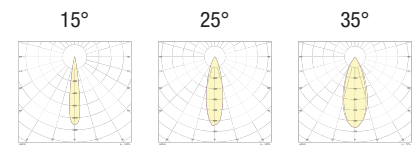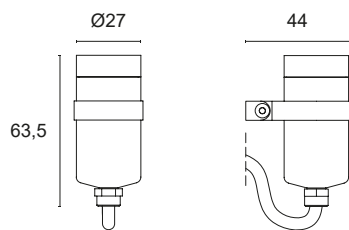

### BASIC CODES

**L23.**

### FINISHES

- 2** Matt black
- 7** Brushed aluminium

### LIGHT BEAM

- 15** 15°
- 25** 25°
- 35** 35°

### LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

### POWER


- 3** 3x0,8W - 350mA - 150 lm
- 5** 3x1,2W - 500mA - 210 lm

Code example:

DUVAR + Brushed aluminium + 15° light beam + "Wine" Amber + 2,4W = Code: L23.715AM3

# VERTIGO

## L14.

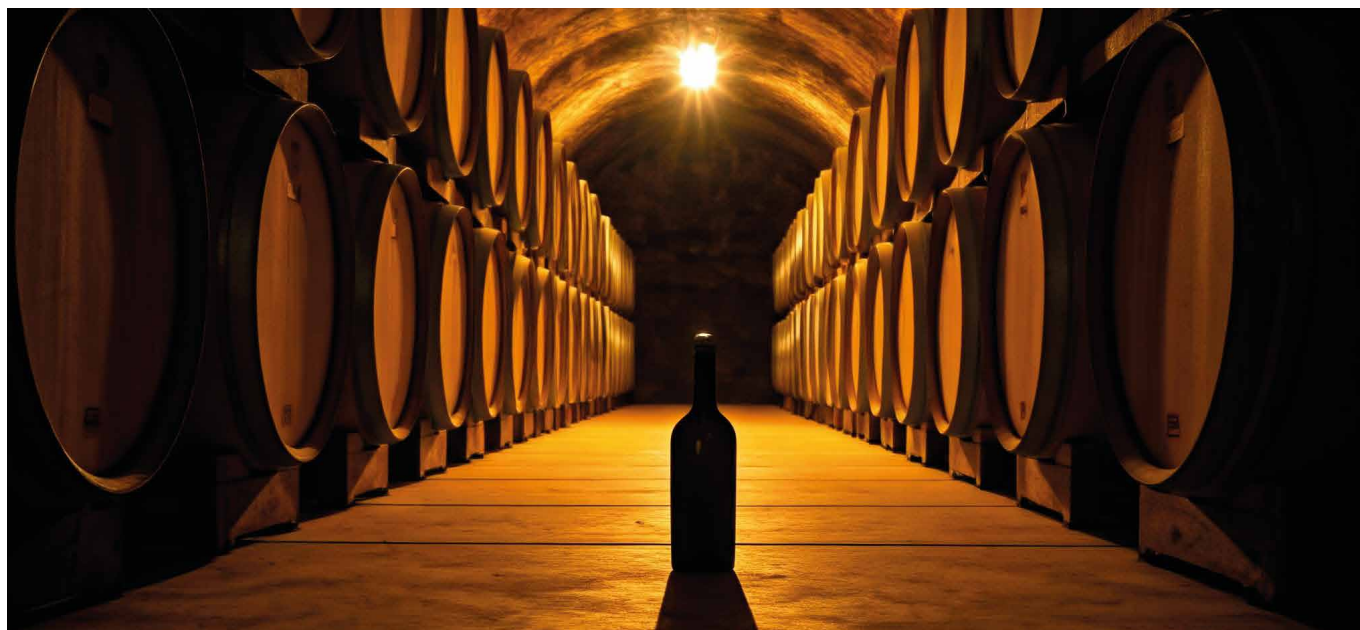

Directional projector in anticorrosion anodised or decorated aluminium with power LEDs. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.

Power LED CRI>80

Power: 3,2W@350mA - 4,8W@500mA




Lumen: 200Lm@350mA - 280Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**



### BASIC CODES

**L14.**

### FINISHES

- 2** Matt black
- 7** Brushed aluminium

### LIGHT BEAM

- 10** 10°
- 35** 35°
- 60** 60°
- 80** 80°

### LED COLOUR

- AM** "Wine" Amber



Approved by  
C I V C

### POWER

- 3** 4x0,8W - 350mA - 200 lm
- 5** 4x1,2W - 500mA - 280 lm

Code example:

VERTIGO + Brushed aluminium + 10° light beam + "Wine" Amber + 3,2W = Code: L14.710AM3

# ZEPPELIN

L06.



Directional projector in anticorrosive anodised or decorated aluminium with power LED source. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.


Power LED CRI>80

Power: 7,2W@350mA - 10,8W@500mA



Lumen: 450Lm@350mA - 630Lm@500mA

350mA - 500mA constant current power supply

Series connection, 50 cm cable

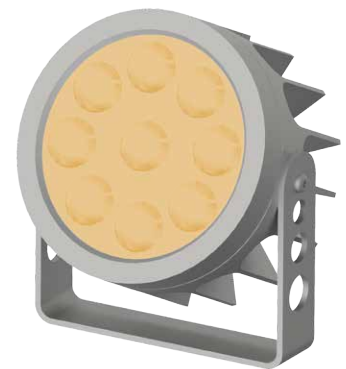

 **MADE IN ITALY**

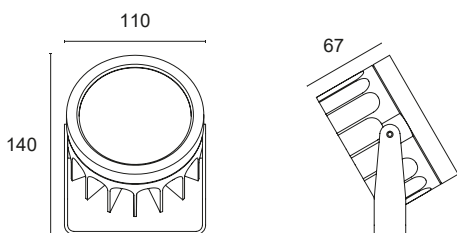





## BASIC CODES

**L06.**

## FINISHES

-  **2** Matt black
-  **7** Brushed aluminium

## LIGHT BEAM

-  **10** 10°
-  **35** 35°
-  **60** 60°
-  **80** 80°

## LED COLOUR

-  **AM** "Wine" Amber



Approved by  
C I V C

## POWER

- 3** 9x0,8W - 350mA - 450 lm
- 5** 9x1,2W - 500mA - 630 lm

Code example:

ZEPPELIN + Matt black + 10° light beam + "Wine" Amber + 7,2W = Code: L06.210AM3







## DECORATIVE TECHNICAL LIGHTING

PIXEL 1.....	52
EVA.....	53
REM.....	54
CISO P31 CEILING LIGHT.....	55
CISO P33 CEILING LIGHT.....	56
CISO S31 PENDANT LIGHT.....	57
CISO S33 PENDANT LIGHT.....	58
CEILING ROSES FOR OTHER CISO COMPOSITIONS.....	59

# PIXEL 1

## F10.



Directional lamp in polished, flexible aluminium suitable for reading, decoration or courtesy lighting. Choice of secondary optics, can be installed indoors. Screw mounting with base or on wall.


Power LED CRI>80

Power: 0,8W@350mA

Lumen: 50Lm@350mA

350mA constant current power supply


Constant current power supply included

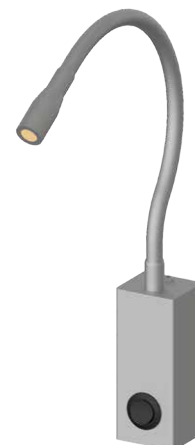



 **MADE IN ITALY**



**F10.** base w/box

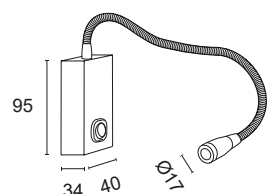

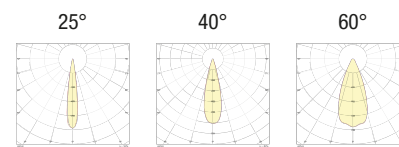

**F10.** flat base






**BASIC CODES**

**F10.**

**FINISHES**

-  **6** Chrome
-  **7** Brushed aluminium

**LIGHT BEAM**

-  **25** 25°
-  **40** 40°
-  **60** 60°

**LED COLOUR**

-  **AM** "Wine" Amber
-  Approved by CIVC

**BASE W/BOX AND SWITCH**

- BX** without switch
- BB** with white switch
- BB** with black switch

**FLAT BASE AND SWITCH**

- PX** without switch
- PB** with white switch
- PN** with black switch

Code example:

PIXEL 1 + Brushed aluminium + 25° light beam + "Wine" Amber + Flat base white switch = Code: **F10.725AMPB**

# EVA

## L33.



Dual-emission lamp in polished aluminium for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting with wall base.


Power LED CRI>80

Power: 1,2W+1,2W@500mA




Lumen: 70+70Lm@500mA

500mA constant current power supply

Power supply included and built in.

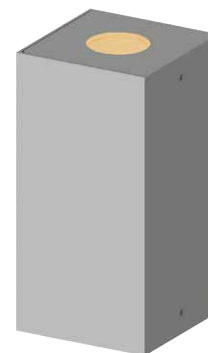

 **MADE IN ITALY**

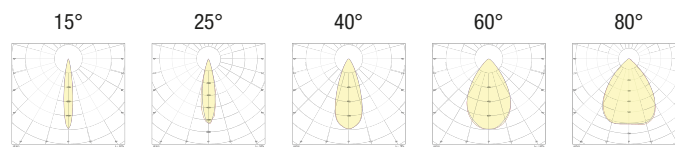

### BASIC CODES

**L33.**

### FINISHES

- 1 White
- 2 Matt black
- 7 Brushed aluminium

### 1st LIGHT BEAM

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°

### 2nd LIGHT BEAM

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°


### LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

Code example:

EVA + Matt black + 15° 1st light beam + 40° 2nd light beam + "Wine" Amber = Code: L33.21540AM

# REM RG32.

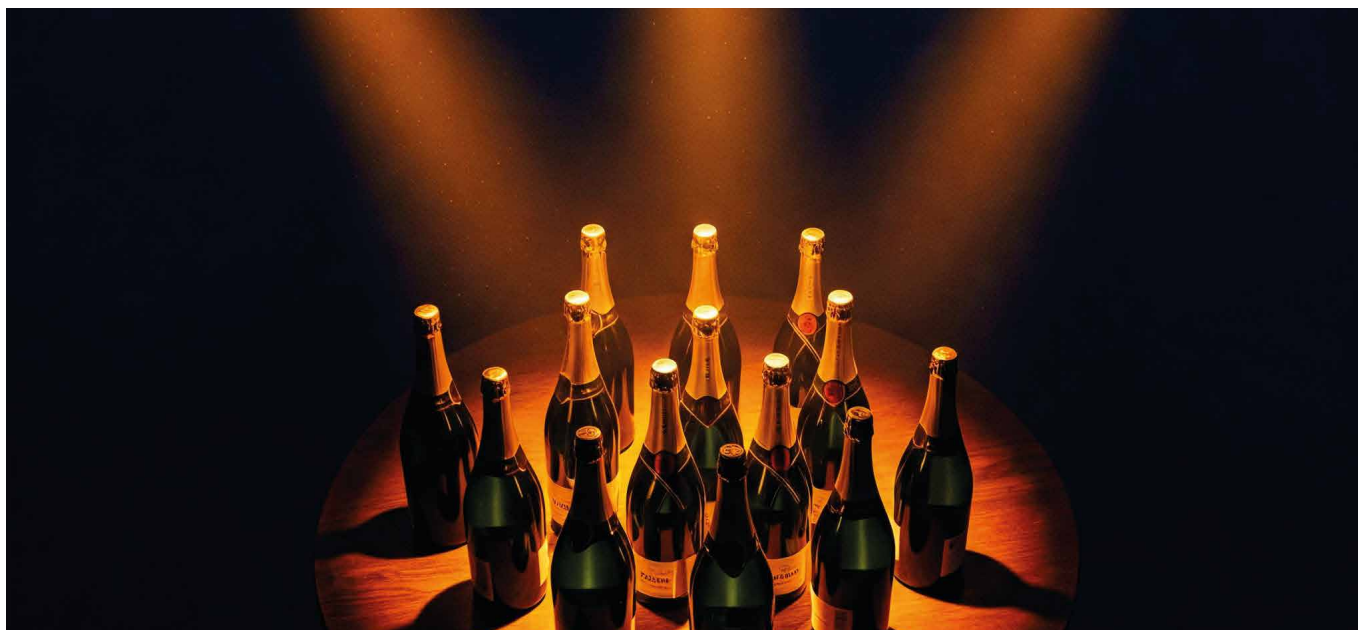

Ø32mm decorated aluminium directional projector decorated with power LEDs for spot, decorative, reading or courtesy lighting. Choice of secondary optics, can be installed indoors. Mounting with concealed insert.

Power LED CRI>80

Power: 1,2W@500mA - 3,6W@500mA



Lumen: 70Lm@500mA - 210Lm@500mA

500mA constant current power supply

Series connection, 50 cm cable



 **MADE IN ITALY**

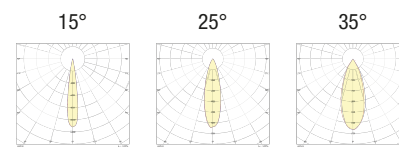

## BASIC CODES

**RG32.**

## MEASUREMENTS

- A** Ø32 - H 130mm
- B** Ø32 - H 145mm

## FINISHES

- 1** White
- 2** Matt black
- 7** Brushed aluminium
- 9** Polished gold

## LIGHT BEAM

- 15** 15°
- 25** 25°
- 35** 35°

## LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

## POWER

- 3** 1x2W  
500mA - 216 lm
- 5** 3x2W  
500mA - 648 lm

Code example:

REM + H130mm + White + 15° light beam + "Wine" Amber + 1,2W = Code: RG32.A115AM3

# CISO P31 CEILING LIGHT

P31.





Ø32mm decorated aluminium cylinder ceiling light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>80  
Power: 1,2W@500mA  
Lumen: 70Lm@500mA  
500mA constant current power supply  
Power supply included and remote



 **MADE IN ITALY**

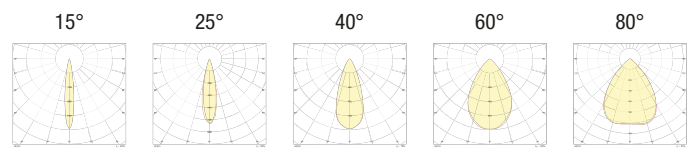

## BASIC CODES

**P31.**

## SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

## FINISHES

- 1** White
- 2** Matt black
- 5** Gloss aluminium
- 7** Brushed aluminium
- 8** Gold leaf
- 9** Bond Copper

## LIGHT BEAM

- 15** 15°
- 25** 25°
- 40** 40°
- 60** 60°
- 80** 80°

## LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

Code example:

CISO P31 CEILING LIGHT + H470mm + White + 15° light beam + "Wine" Amber = Code: P31.D115AM

# CISO P33 CEILING LIGHT

P33.



Ø32mm decorated aluminium cylinder ceiling light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with concealed base.

Power LED CRI>80

Power: 3,6W@500mA



Lumen: 210Lm@500mA

500mA constant current power supply

Power supply included and remote



 **MADE IN ITALY**

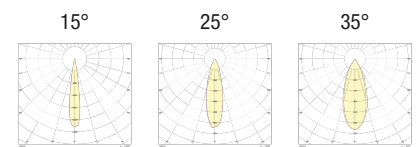

## BASIC CODES

**P33.**

## SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

## FINISHES

- 1** White
- 2** Matt black
- 5** Gloss aluminium
- 7** Brushed aluminium
- 8** Gold leaf
- 9** Bond Copper

## LIGHT BEAM

- 15** 15°
- 25** 25°
- 35** 35°

## LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

Code example:

CISO P33 CEILING LIGHT + H470mm + White + 15° light beam + "Wine" Amber = Code: P33.D115AM



# CISO S31 PENDANT LIGHT

S31.





Ø32mm decorated aluminium cylinder suspended light with power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

Power LED CRI>80  
Power: 1,2W@500mA  
Lumen: 70Lm@500mA  
500mA constant current power supply  
Power supply included and integrated



 **MADE IN ITALY**



## BASIC CODES

**S31.**

## SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

## FINISHES

- 1** White
- 2** Matt black
- 5** Gloss aluminium
- 7** Brushed aluminium
- 8** Gold leaf
- 9** Bond Copper

## LIGHT BEAM

- 15** 15°
- 25** 25°
- 40** 40°
- 60** 60°
- 80** 80°

## LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC

## CABLE


- T** Transparent
- B** White
- N** Black
- R** Red

Code example:

CISO S31 SUSPENSION LIGHT + H470mm + White + 15° light beam + "Wine" Amber + Black fabric cable = Code: **S31.D115AMN**

# CISO S33 PENDANT LIGHT

S33.


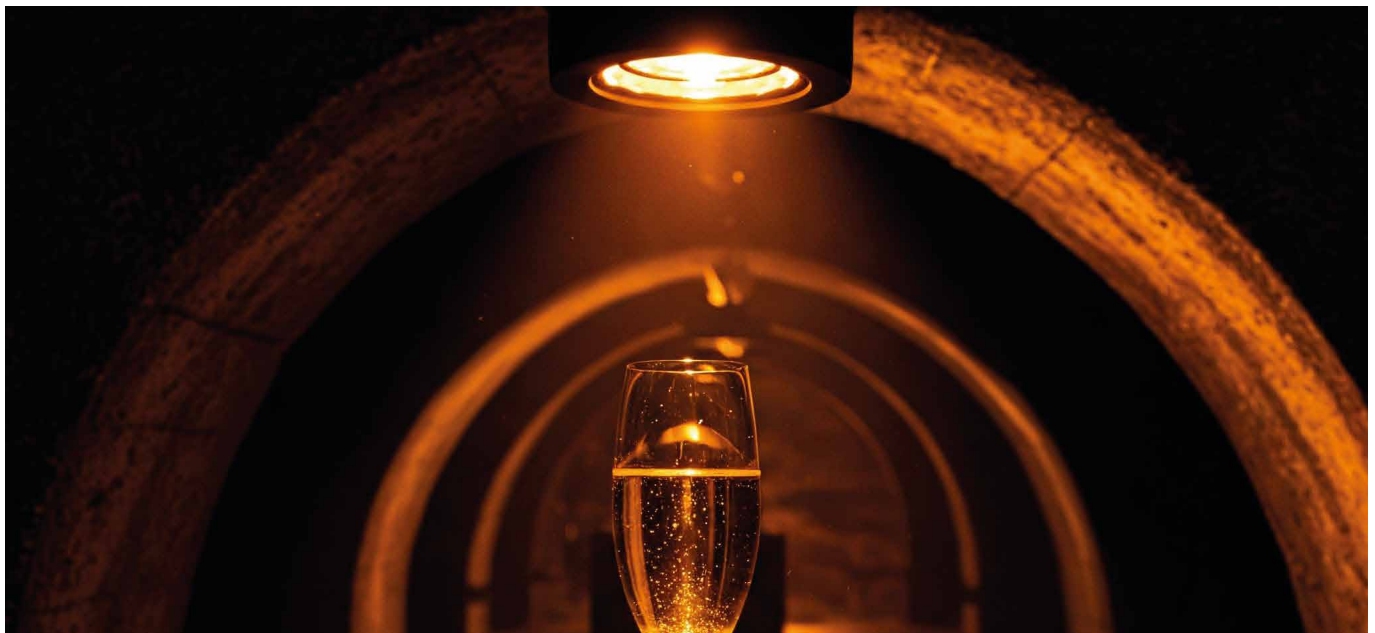


Ø32mm decorated aluminium cylinder suspended light with three power LEDs, suitable as accent or highlight lighting for residential, restaurant or retail environments. Choice of flush-mounted secondary optics, can be installed indoors. Mounting with screw-in ceiling rose, cable 2000mm, choice of finish.

Power LED CRI>80  
Power: 3,6W@500mA  
Lumen: 210Lm@500mA  
500mA constant current power supply  
Power supply included and integrated



 **MADE IN ITALY**

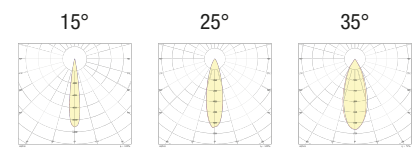

## BASIC CODES

**S33.**

## SIZE

- A** H 90mm
- B** H 180mm
- C** H 290mm
- D** H 470mm
- E** H 760mm

## FINISHES

- 1** White
- 2** Matt black
- 5** Gloss aluminium
- 7** Brushed aluminium
- 8** Gold leaf
- 9** Bond Copper

## LIGHT BEAM

- 15** 15°
- 25** 25°
- 35** 35°

## LED COLOUR

- AM** "Wine" Amber
-  Approved by CIVC


## CABLE

- T** Transparent
- B** White
- N** Black
- R** Red

Code example:

CISO S33 SUSPENSION LIGHT + H470mm + White + 35° light beam + "Wine" Amber + Black fabric cable = Code: **S33.D135AMN**

# CEILING ROSES FOR OTHER CISO COMPOSITIONS




BASIC CODES

**S31.F1.**

FINISHES

- 1 White
- 2 Matt black
- 5 Gloss aluminium
- 7 Brushed aluminium
- 8 Gold leaf
- 9 Bond Copper

Ø50 mm decorated aluminium ceiling rose for fixing CISO S31, S33, S50 and S80 suspension lights onto plasterboard. Flush-mounted with springs.

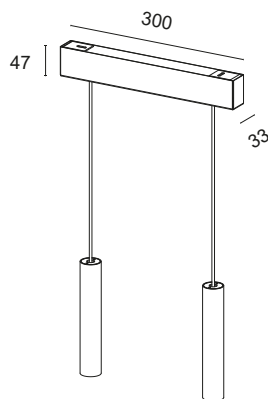


BASIC CODES

**RM0300.**

FINISHES

- 1 White
- 2 Matt black
- 7 Brushed aluminium
- 8 Gold leaf
- 9 Bond Copper

300 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions. Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.

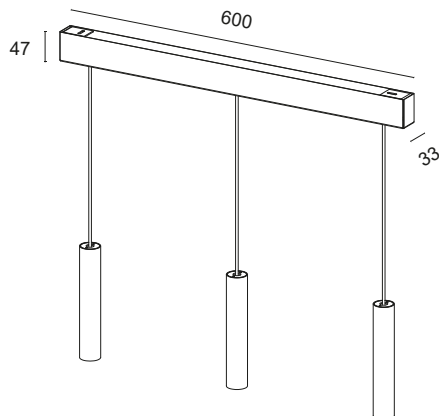


BASIC CODES

**RM0600.**

FINISHES

- 1 White
- 2 Matt black
- 7 Brushed aluminium
- 8 Gold leaf
- 9 Bond Copper

600 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions. Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.

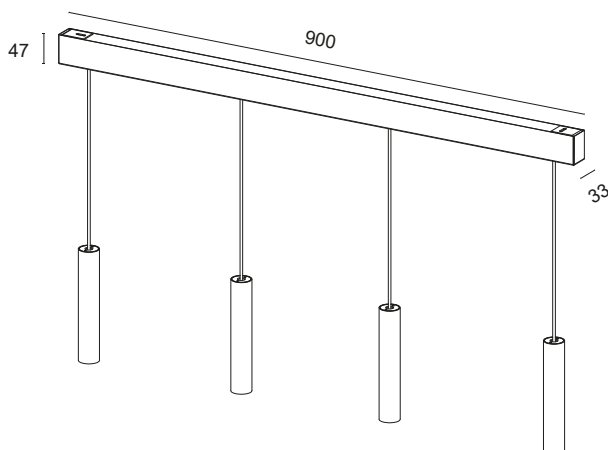

BASIC CODES

**RM0900.**

FINISHES

- 1 White
- 2 Matt black
- 7 Brushed aluminium
- 8 Gold leaf
- 9 Bond Copper

900 mm decorated metal ceiling rose for CISO S31, S33, S50 and S80 suspension compositions. Contains the single-cylinder power supply. Mounting with bracket with concealed screws and magnetic ceiling rose. N.B. Drilling and number of suspended lights to be defined when ordering.

Code example:  
300mm Ceiling Rose + White = Code: RM0300.1





## INSTALLATION ACCESSORIES


HOLLY, HALISSA AND MEMO FORMWORK .....	62
ACSO SERIES FORMWORK .....	62
ACSO SERIES RING .....	62
DEHO AND DARDO FORMWORK .....	63
DEHO AND DARDO SERIES RING .....	63
DUVAR BASE AND STAKE .....	63

# HOLLY, HALISSA AND MEMO FORMWORK


Thermoplastic formwork for HOLLY, HALISSA and MEMO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.

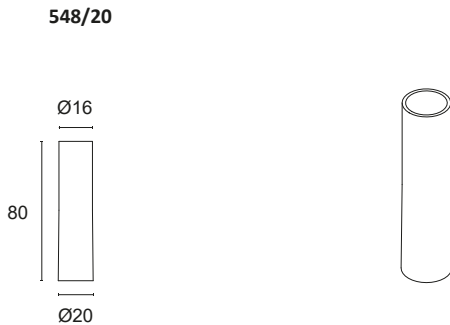

Position the formwork flush with the wall or floor.





Fix the formwork with glue or putty and level it flush with the wall or floor. Prevent foreign bodies from entering the formwork.




Connect the electricals as stipulated in the product sheet and check it works correctly. Insert the product into the formwork using light pressure.

## ACSO SERIES FORMWORK


Thermoplastic formwork for ACSO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.

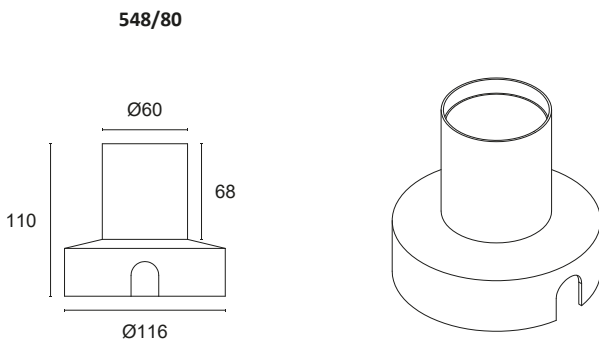

Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.





Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.




After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.

## ACSO SERIES RING


Aluminium ring for ACSO series models for use during flush fitting in plasterboard.

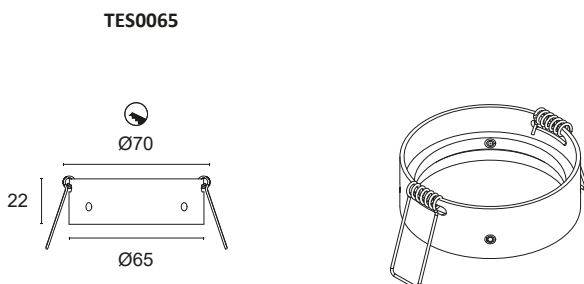

Place the ring in the spotlight.






Secure the ring with the supplied grub screws.




Drill the plasterboard to the indicated size and insert the spotlight into the hole.

# DEHO AND DARDO FORMWORK


Thermoplastic formwork for DEHO and DARDO series models for use during installation. Can be installed in brick walls or floors. Necessary for correct installation.



Position the formwork with the top flush with the wall or floor. Apply the supplied cap to prevent foreign bodies from entering the interior. Make sure there is adequate drainage under the formwork.





Check that the formwork does not move when laying the screed. Route the electrical cable from the formwork to the shaft. Close the formwork with the cap provided.




After plastering, remove the cap and connect the electricals according to the product sheet, check that it works properly and insert it into the formwork with light pressure.

# DEHO AND DARDO SERIES RING


Aluminium ring for DEHO and DARDO series models for use during flush fitting in plasterboard.



Place the ring in the spotlight.




Secure the ring with the supplied grub screws.




Drill the plasterboard to the indicated size and insert the spotlight into the hole.

# DUVAR BASE AND STAKE

Mounting systems for DUVAR projector, necessary for correct installation.

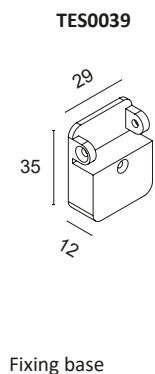


Fixing base

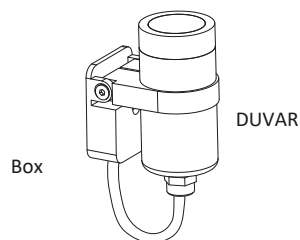


Box

PDH235

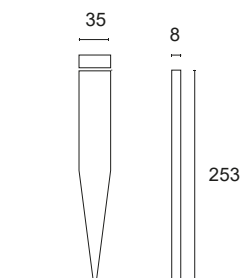

Fixing stake

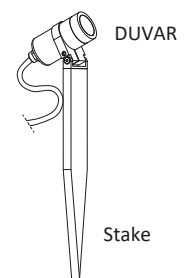

Stake









## **NANOLED LIGHTING**

It is a brand of Tecnocavi Service srl  
61021 Carpegna (PU) via Pian dei Roghi, 32  
Tel. + 39 0722 77418  
[www.nanoledlighting.com](http://www.nanoledlighting.com)

## **CONTACTS**

### **Information office**

[info@nanoledlighting.com](mailto:info@nanoledlighting.com)

### **Federico Francioni**

Owner and Sales Manager  
[federico@nanoledlighting.com](mailto:federico@nanoledlighting.com)

### **Francesco Francioni Jr.**

Italy Sales  
[commerciale@nanoledlighting.com](mailto:commerciale@nanoledlighting.com)

### **Fabrizio Francioni**

Owner and Production and Procurement Manager  
[fabrizio@nanoledlighting.com](mailto:fabrizio@nanoledlighting.com)

### **Francesco Francioni**

Owner and General Management  
[francesco@nanoledlighting.com](mailto:francesco@nanoledlighting.com)

### **Francesca Severi**

Head of Administration  
[amministrazione@nanoledlighting.com](mailto:amministrazione@nanoledlighting.com)

### **Remo Giuliani**

Technical and design office  
[tecnico@nanoledlighting.com](mailto:tecnico@nanoledlighting.com)

## **WINE AND CHAMPAGNE COLLECTION CATALOGUE Ed. 01**

Graphic design and realisation: Team Nanoled Lighting

**Tecnocavi Service S.r.l.** accepts no liability for printing errors, measurements and technical data. The company reserves the right to make changes to the products illustrated, at any time, without prior notice. Unauthorised reproduction or copying is prohibited.



nanoled  
LIGHTING