

# ACSO 1

## L601.



Polished 304 steel recessed light with power LEDs for primary floor lighting of green areas and architectural facades. Choice of secondary optics. Can be flush fitted indoors and outdoors  
Mounting with formwork or ring with springs.

Power LED CRI>80

Power: 4W@350mA - 8W@500mA

Lumen: 540lm@350mA - 864lm@500mA

350mA - 500mA constant current power supply




Series connection, 50 cm cable

Constant voltage power supplies p. 232 - 233

Installation accessories page 270

Dimming Accessories page 249



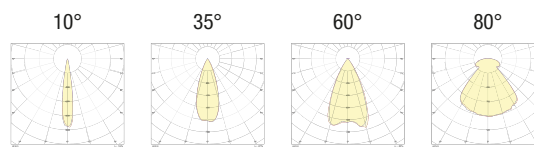

 **MADE IN ITALY**





### BASIC CODES

**L601.**








### LIGHT BEAM

-  **10** 10°
-  **35** 35°
-  **60** 60°
-  **80** 80°

### GLASS

-  **T** Transparent
-  **S** Brushed

### LED COLOUR

-  **BN** 4000K
-  **BC** 3000K
-  **CC** 2700K
-  **BL** Blue
-  **VE** Green
-  **RO** Red
-  **AM** "Wine" Amber

### POWER

- 3 4x1W - 350mA - 540 lm**
- 5 4x2W - 500mA - 864 lm**



Approved by  
CIVC

Code example:

ACSO 1 + Light Beam 35° + Clear Glass + 4000k +4W = Code: L601.35TBN3