

CND P31

P31.

Plafonnier D.32mm en aluminium avec 1 POWER LED.
Pour l'éclairage ponctuel ou de valorisation d'espaces résidentiels, de restauration et de commerce de détail. Peut être installé à l'intérieur. Fourni avec une patère escamotable ligne moderne et minimale.

- Grande variété des finitions, des optiques secondaires et des dimensions.
- Système de fixation inclus dans l'emballage.
- Alimentation: 500mA
- Câble: 50 cm.

À CONNECTER EN SÉRIE

*Aluminium ceiling D.32mm cylinder with 1 POWER LED.
It is suitable as main lighting for wide residential areas and retails.
It can be installed on indoor locations with hidden insert.*



- *Wide range of finishings, of secondary optics and dimensions.*
- *Fixing system included.*
- *Power supply: 500mA*
- *Cable: cm. 50*

CONNECT IN SERIES




DIMENSIONS / DIMENSIONS

ACCESSOIRES / ACCESSORIES

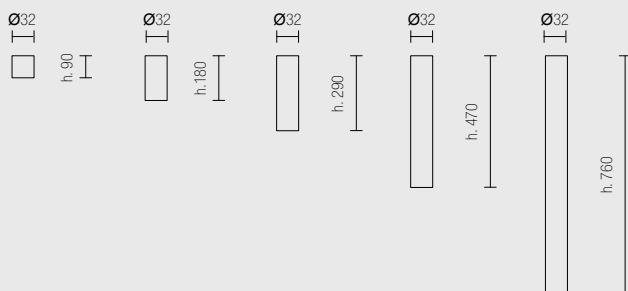

Fixation placoplâtre **P50.F2**
Dry wall fixing P50.F2



Alimentations (p. 263).
Drivers page 263

CODES DE BASE / BASE CODES

DIMENSIONS / DIMENSION

FINITIONS / FINISHINGS

FAISCEAU LUMINEUX / LIGHT BEAM

COULEUR LED / LED COLOUR

PUISSANCE / POWER

P31.

A H 90 mm

B H 180 mm

C H 290 mm

D H 470 mm

E H 760 mm

- 1 Blanc / White
- 2 Noir / Black
- 5 Aluminium brillant /
Bright aluminum
- 7 Aluminium brossé /
Satin aluminum

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°

- BN 4000°K
- BC 3000°K
- CC 2700°K
- BL Bleu / Blue
- VE Vert / Green
- RO Rouge / Red
- AM Ambré / Amber

1x2W 500mA - 176 lm

Exemple de codification: Article CND P31. + Dimension H180 + Finition blanc + Faisceau lumineux 15° + Couleur led 4000°K = Code : **P31.B115BN**

Example of codification: Product CND P31. + Dimensions H180 + Finition white + Light beam 15° + Led color 4000°K = Code: P31.B115BN