


DIRECTIONAL RHO

R4.

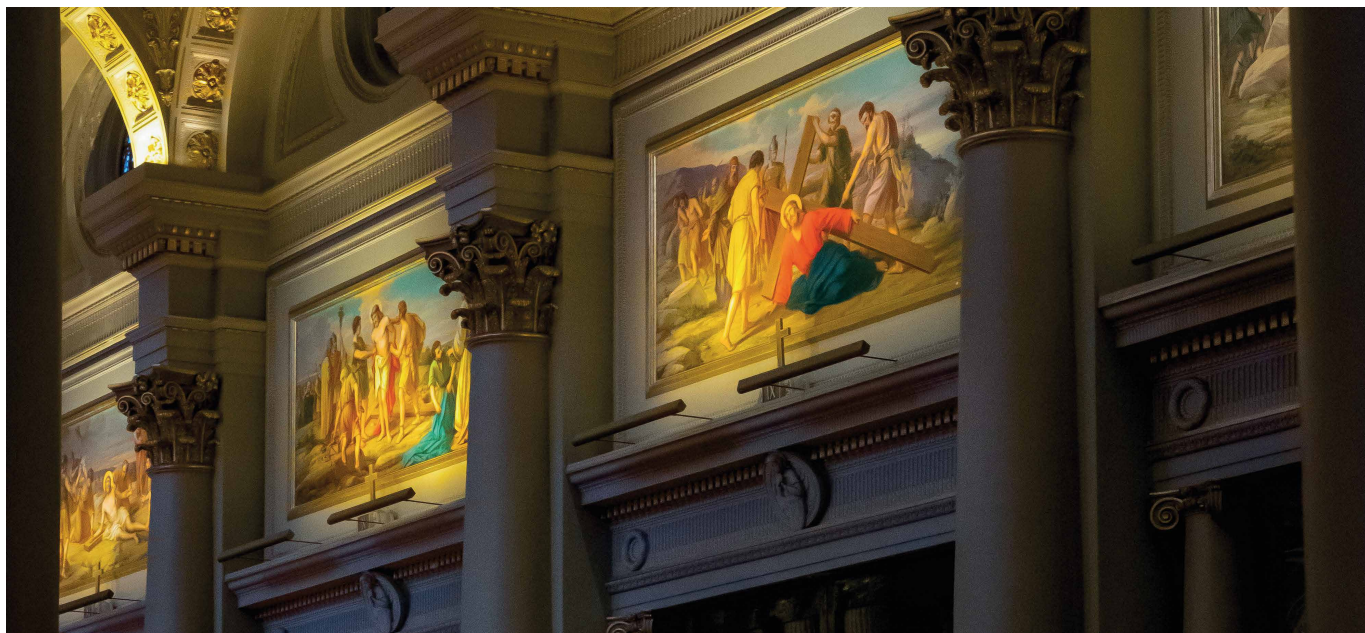

Decorated anodised aluminium lamp complete with satin or microprismatic diffuser and high-brightness LED source with high Lumen/Watt ratio. Suitable for primary residential, retail, large-space and general lighting. Ceiling mounting with directional steel brackets.




Constant voltage supply 24Vdc
Parallel connection, 50 cm cable

Constant voltage power supplies page 237
Dimming Accessories page 249

 **MADE IN ITALY**



*On request IP54 or IP65

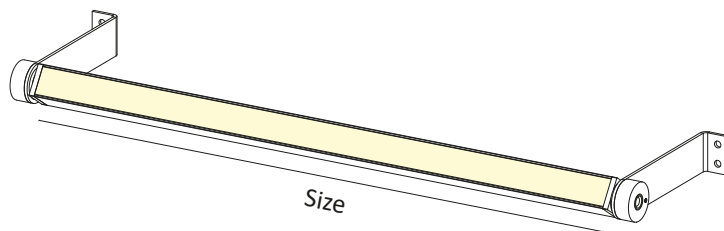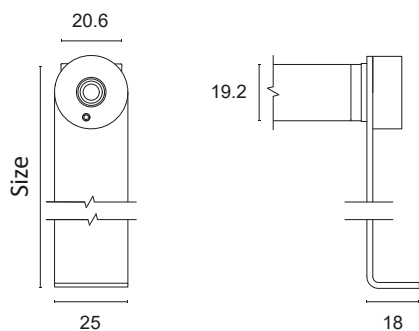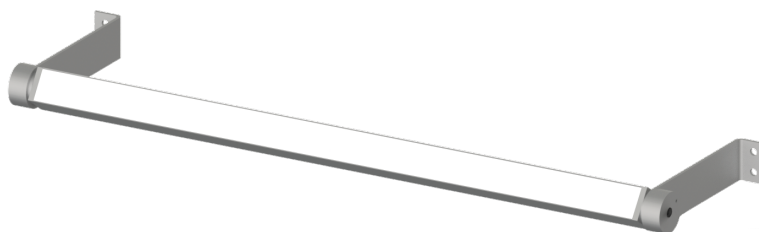

BASIC CODES

R4.

FINISHES

- 1** White
 - 2** Matt black
 - 7** Brushed aluminium
- *Other finishes on request.

BRACKET SIZE

- 1** 50mm
- 2** 100mm
- 3** 200mm

SIZE

- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm

LED COLOUR

- BN** 4000K
 - BC** 3000K
 - CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

| | | | | | | | |
|------|------------|---------|----------|----------|-------|--------|---|
| IP65 | D65 | 10W/m | 1400Lm/m | 98LED/m | S2835 | CRI>85 |  |
| IP54 | E54 | 16.8W/m | 2000Lm/m | 140LED/m | S2835 | CRI>85 |  |
| IP54 | F54 | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>85 |  |
| | F | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>85 |  |
| | F+ | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>90 |  |
| | G | 25W/m | 3500Lm/m | 160LED/m | S2835 | CRI>80 |  |
| | L+ | 28W/m | 3500Lm/m | 160LED/m | S2835 | CRI>90 |  |
| | H | 30W/m | 4500Lm/m | 240LED/m | S2835 | CRI>80 |  |

*Energy class referring to light source

DIFFUSER

- M** MICROPRISMATIC
- S** BRUSHED

Code example:

RHO DIRECTIONAL + White + Bracket 100mm + 1000mm + 3000K + 20.2W/m CRI>85 + Brushed diffuser = Code: R4.12HBCFS