

EOS CEILING LIGHT

L95D.



Thermoplastic ceiling light for accent, decoration and courtesy lighting. Choice of secondary optics, can be installed indoors, mounting with concealed screws.

Power LED CRI>80

Power: 1W@350mA

Lumen: 135Lm@350mA


350mA constant current power supply

Series connection, 50 cm cable



Constant current power supplies page 232

Accessories for quick connection page 244

Dimming Accessories page 249



 **MADE IN ITALY**

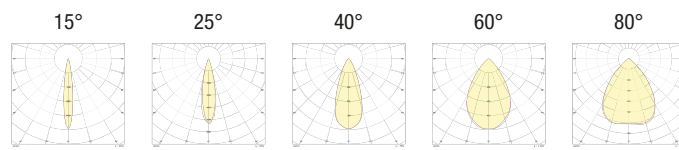

BASIC CODES

L95D.

FINISHES

- 1 White
- 2 Matt black
- 3 Brushed gold
- 6 Chrome
- 7 Brushed aluminium
- 8 Transparent
- 9 Polished gold

LIGHT BAND

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°

LED COLOUR

- BN** 4000K
- BC** 3000K
- CC** 2700K
- BL** Blue
- VE** Green
- RO** Red
- AM** "Wine" Amber



Approved by
CIVC

Code example:

EOS CEILING LIGHT + Brushed Aluminium + 25° light beam + 3000K + 1W = Code: L95D.725RO