



C1

Small-size anodized aluminium 6060 extruded profile, ideal to be flush-mounted even on thin surfaces or surface mounting on flat surfaces. Extremely easy to install, thanks to the snap-in diffuser, and the flush-mounted side supports. Required for the correct dissipation of LED strips, and recommended for alcove, under-wall cupboard, shelf and display case lighting.

 EXTRUDED IN ITALY

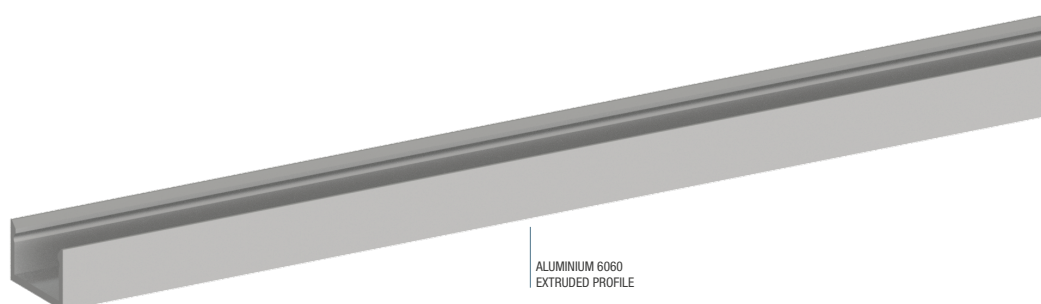

1:1 SCALE



BASIC CODES



PA.C1.

LENGTH

- 1 1000mm
- 2 2000mm
- 3 3000mm

FINISHES

- 1 Matt white RAL9003
- 2 Matt black RAL9005
- 7 Brushed aluminium




BASIC CODES

SC1.

FINISHES

- 1 White
- 2 Matt black
- 7 Brushed aluminium

Side aluminium closing support. Easy and quick to install, by exerting a slight side pressure.




BASIC CODES

PA.13X08.

LENGTH

- 1 1000mm brushed
- 2 2000mm brushed
- 3 3000mm brushed

Brushed snap-on diffuser. The diffuser can be easily removed for maintenance operations.



BASIC CODES

TC22

Rectangular electronic device with ON/OFF TOUCH system. The LED can be switched ON/OFF by gently touching the sensitive device section. To be installed inside the profile, in contact with the diffuser, with the double-sided tape supplied (12Vdc and 24Vdc 3A max.)

Code example: C1 Profile + 1000mm Length + Brushed Aluminium Finish = Code: PA.C1.17