

Ø32mm decorated aluminium directional projector decorated with power LEDs for spot, decorative, reading or courtesy lighting. Choice of secondary optics, can be installed indoors. Mounting with concealed insert.

LIGHT BEAM

15°

25°


35°

15


25


Power LED CRI>90 Power: 2W@500mA - 6W@500mA Lumen: 216Lm@500mA - 648Lm@500mA 500mA constant current power supply Series connection, 50 cm cable

Constant current power supplies page 233 **Dimming Accessories page 249**

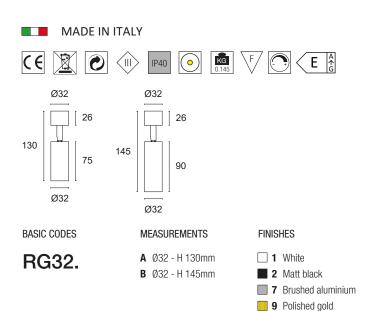







Code example: REM + H130mm + White + Light Beam 15° + 4000K + 2W = Code: RG32.A115BN3