
# **RHO SUSPENSION**

R2.



Decorated, anodised aluminium suspension light complete with brushed or microprismatic diffuser and high-brightness LED source with a high Lumen/Watt ratio and CRI>90. Suitable as technical decorative lighting for residential, commercial, office, retail and general lighting. Minimalist line, 'full light' diffusion. Suspension mounting with steel ropes and plugs with concealed screws; decentralised ceiling rose, 3000 mm cable, choice of finish.

Constant 24Vdc voltage supply Power supply included and integrated

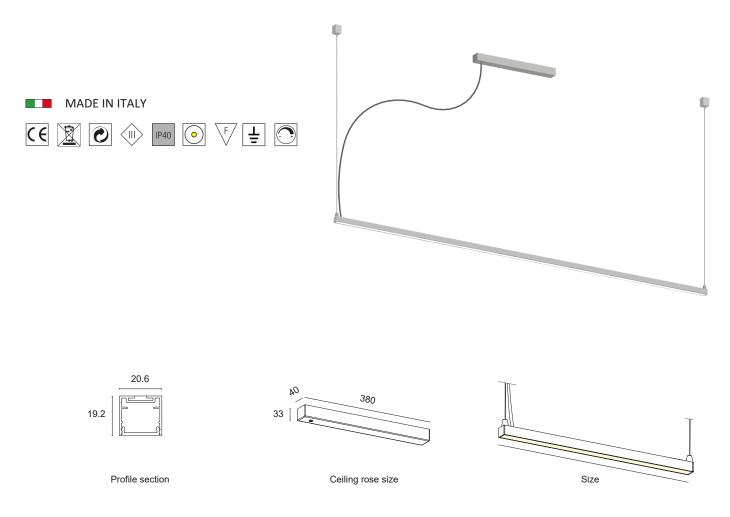



#### BASIC CODES

R2.

# FINISHES



CABLE		
🔲 T	Transparent	
🗌 B	White	
N	Black	

SIZE	
G	900mm
Н	1000mm
I	1200mm
J	1300mm
К	1400mm
L	1500mm
М	1800mm
Ν	2000mm
0	2300mm
Р	2500mm

Q

R

2800mm

3000mm

## LED COLOUR

BN	4000K
📃 BC	3000K
CC 📃	2700K
*Strip als	so available
coloure	d, Dynamic
RGB an	d RGBW.

White,

## POWER

E+	16.8W/m	2000Lm/m 140LED/m S2835	CRI>90	<
F+	20.2W/m	2500Lm/m 168LED/m S2835	CRI>90	$\langle$
L+	28W/m	3500Lm/m 160LED/m S2835	CRI>90	<

\*Energy class referring to light source



D

Е D

- Μ MICROPRISMATIC
- S BRUSHED

#### POWER SUPPLY

- N ON/OFF
- **D** DALI + PUSH

Code example: RHO SUSPENSION + White + Black cable + 900mm + 3000K + 28W/m CRI>90 + brushed diffuser + 0N/OFF = Code: R2.1NGBCL+SN