

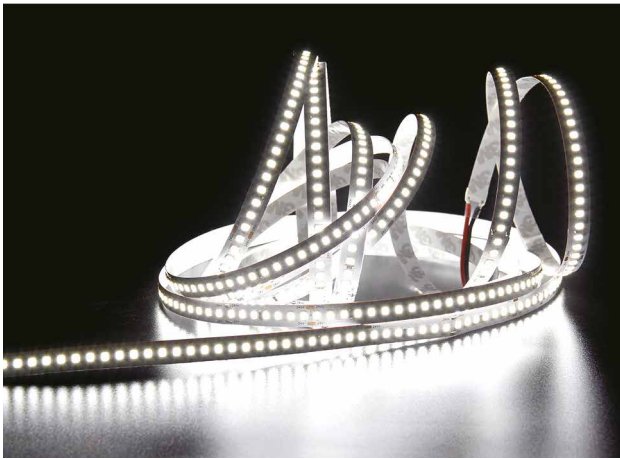


SMD2835 CRI>80 24V 20.2W/m Lumen/m 2100 - 2500



Measurements

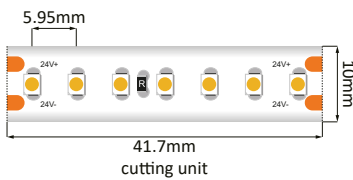


Features

- 5-metre LED SMD2835 reel on flexible PCB and 3M professional adhesive
- Single BIN LED selection with 3SDCM
- CRI>80
- Dimmable with various control systems
- Efficiency above 150lm/W
- 2100 - 2500lm/m

Parameters

Power	20.2W/m
Voltage	DC 24V
LED/m	168pcs/m
LED colour (CCT)	2700K - 3000K - 4000K
Current	0.72A/m
Rating	IP20 - IP54
Emission angle	120°
Operating temperature	-20°C ~ +55°C

Photometric Data

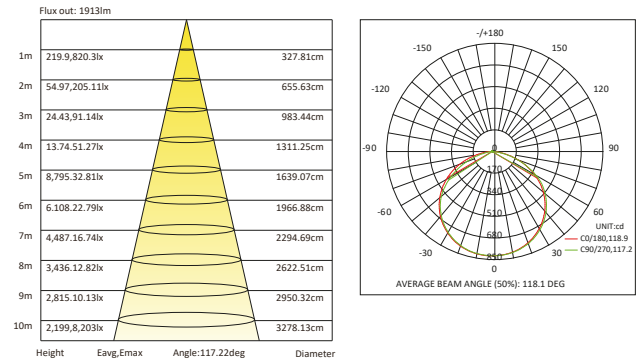

Code

Colour

IP rating

Code	Colour	IP rating
S2835.CC3	2700K	IP20
S2835.BC3	3000K	IP20
S2835.BN3	4000K	IP20
S2835.54.CC3	2700K	IP54
S2835.54.BC3	3000K	IP54
S2835.54.BN3	4000K	IP54