



SMD3528 CRI>80 12V 4.8W/m Lumen/m 400 - 440



Measurements

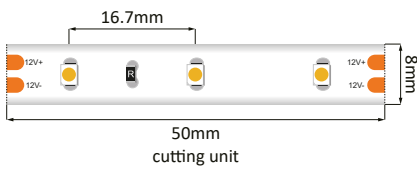


Features

- 5-metre LED SMD3528 reel on flexible PCB and 3M professional adhesive
- Single BIN LED selection with 3SDCM
- CRI>80
- Dimmable with various control systems
- Efficiency above 90lm/W
- 400 - 440lm/m

Parameters

Power	4.8W/m
Voltage	DC 12V
LED/m	60pcs/m
LED colour	(CCT) 2700K - 3000K - 4000K
Current	0.4A/m
Rating	IP20 - IP54 - IP65
Emission angle	120°
Operating temperature	-20°C ~ +55°C

Photometric Data

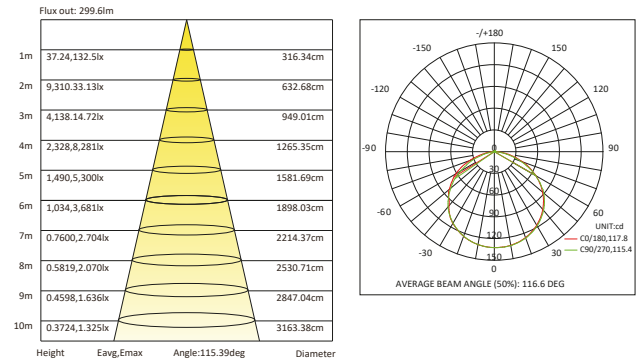

Code

Colour

IP rating

Code	Colour	IP rating
S3528.CC1	2700K	IP20
S3528.BC1	3000K	IP20
S3528.BN1	4000K	IP20
S3528.54.CC1	2700K	IP54
S3528.54.BC1	3000K	IP54
S3528.54.BN1	4000K	IP54
S3528.65.CC1	2700K	IP65
S3528.65.BC1	3000K	IP65
S3528.65.BN1	4000K	IP65