

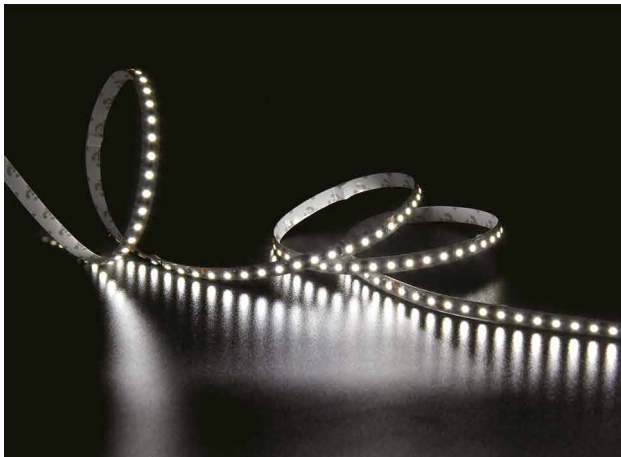


SMD3528 CRI>80 12V 9.6W/m PCB 8mm Lumen/m 800 - 840



Measurements




Features

- 5-metre LED SMD3528 reel on flexible PCB and 3M professional adhesive
- Single BIN LED selection with 3SDCM
- CRI>80
- Dimmable with various control systems
- Efficiency above 90lm/W
- 800 - 840lm/m

Parameters

| | |
|-----------------------|-----------------------------|
| Power | 9.6W/m |
| Voltage | DC 12V |
| LED/m | 120pcs/m |
| LED colour | (CCT) 2700K - 3000K - 4000K |
| Current | 0.8A/m |
| Rating | IP20 - IP54 - IP65 |
| Emission angle | 120° |
| Operating temperature | -20°C ~ +55°C |

Photometric Data

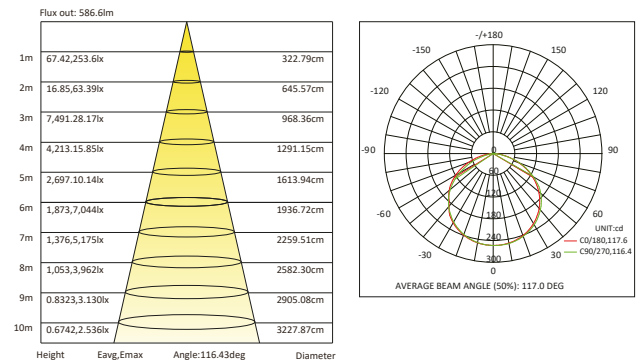

Code

Colour

IP rating

| Code | Colour | IP rating |
|--------------|--------|-----------|
| S3528.CC2 | 2700K | IP20 |
| S3528.BC2 | 3000K | IP20 |
| S3528.BN2 | 4000K | IP20 |
| S3528.54.CC2 | 2700K | IP54 |
| S3528.54.BC2 | 3000K | IP54 |
| S3528.54.BN2 | 4000K | IP54 |
| S3528.65.CC2 | 2700K | IP65 |
| S3528.65.BC2 | 3000K | IP65 |
| S3528.65.BN2 | 4000K | IP65 |