

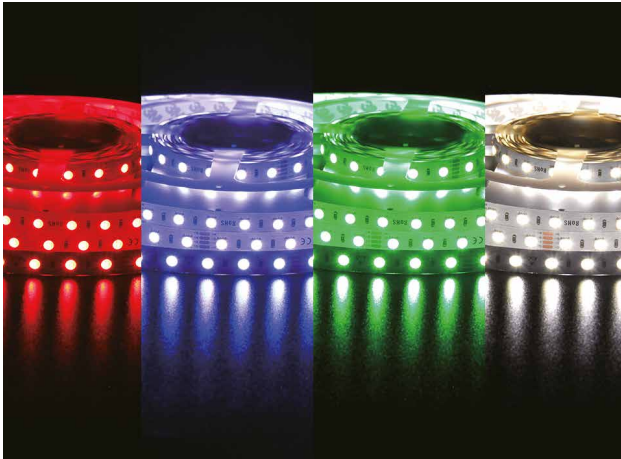


SMD5050 RGB+W 24V 12W/m Lumen/m 870



Measurements

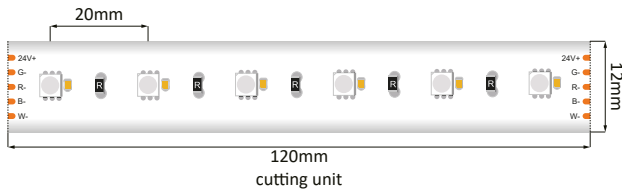


Features

- 5-metre LED SMD5050 reel on flexible PCB and 3M professional adhesive
- Single BIN LED selection with 3SDCM
- Dimmable with various control systems
- 870lm/m

Parameters

Power	R 3W/m - G 3W/m - B 3W/m - W 3W/m
Voltage	DC 24V
LED/m	96pcs/m
LED colour (CCT)	RGB+4000K
Current	R 0.2A/m - G 0.2A/m - B 0.2A/m - W 0.2A/m
Rating	IP20 - IP54 - IP65
Emission angle	120°
Operating temperature	-20°C ~ +55°C

Photometric Data

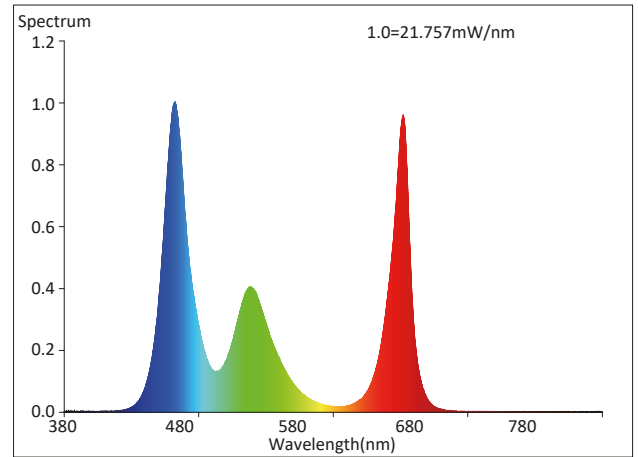

Code	Colour	IP rating
------	--------	-----------

S5050.RGBW1	RGB+W 870 lm/m	IP20
S5050.54.RGBW1	RGB+W 870 lm/m	IP54
S5050.65.RGBW1	RGB+W 870 lm/m	IP65