

SIGMA

S1.



Decorated anodised aluminium lamp complete with brushed or transparent diffuser and high-brightness LED source with a high Lumen/Watt ratio. Suitable for accent and service lighting, suitable for furniture, residential, retail and general lighting. Flush-mounted

Constant 24Vdc voltage supply
Parallel connection, 50 cm cable



Constant voltage power supplies page 237

Dimming Accessories page 249

 **MADE IN ITALY**



Max. milling cut 25mm

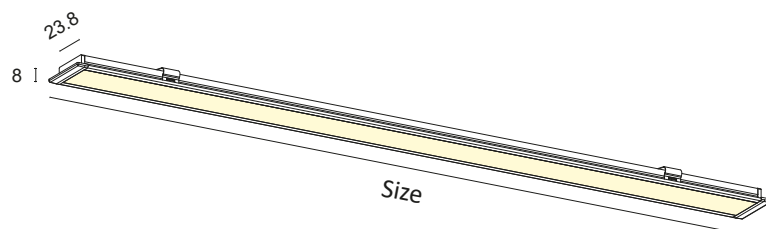

BASIC CODES

S1.

FINISHES

- 1** White
 - 2** Matt black
 - 7** Brushed aluminium
- *Other finishes on request.

SIDE SUPPORTS

- 1** White
- 2** Matt black
- 5** Grey
- 7** Brushed aluminium

SIDE SUPPORTS + TOUCH

- 1T** White
- 2T** Matt black
- 5T** Grey
- 7T** Brushed aluminium

SIZE

- A** 300mm
- B** 450mm
- C** 500mm
- D** 600mm
- E** 700mm
- F** 800mm
- G** 900mm
- H** 1000mm
- I** 1200mm
- J** 1300mm
- K** 1400mm
- L** 1500mm
- M** 1800mm
- N** 2000mm
- O** 2300mm
- P** 2500mm
- Q** 2800mm
- R** 3000mm

LED COLOUR

- BN** 4000K
 - BC** 3000K
 - CC** 2700K
- *Strip also available coloured, Dynamic White, RGB and RGBW.

POWER

- | | | | | | | |
|------------|---------|----------|----------|-------|--------|--|
| E | 16.8W/m | 2000Lm/m | 140LED/m | S2835 | CRI>85 | |
| E+ | 16.8W/m | 2000Lm/m | 140LED/m | S2835 | CRI>90 | |
| F | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>85 | |
| F+ | 20.2W/m | 2500Lm/m | 168LED/m | S2835 | CRI>90 | |
| G | 25W/m | 3500Lm/m | 160LED/m | S2835 | CRI>80 | |
| L+ | 28W/m | 3500Lm/m | 160LED/m | S2835 | CRI>90 | |
| H | 30W/m | 4500Lm/m | 240LED/m | S2835 | CRI>80 | |
| C1+ | 10W/m | 1050Lm/m | COB LED | | CRI>90 | |
| C2+ | 15W/m | 1550Lm/m | COB LED | | CRI>90 | |

*Energy class referring to light source

DIFFUSER

- S** BRUSHED

Code example:

EPTA + White + Side supports white + 1000mm + 3000K + 25W/m CRI>80 + Brushed diffuser = Code: S1.11HBCGS