## **ZEPPELIN**

L06.





Directional projector in anticorodal anodised or decorated aluminium with power LED source. Suitable for primary and decorative lighting of architectural facades, gardens and monuments. Choice of secondary optics, can be installed indoors and outdoors. Screw mounting on bracket.


Power LED CRI>80

Power: 9W@350mA - 18W@500mA

Lumen: 1215Lm@350mA - 1944Lm@500mA 350mA - 500mA constant current power supply

Series connection, 50 cm cable

Constant current power supplies page 232-233 Dimming Accessories page 249

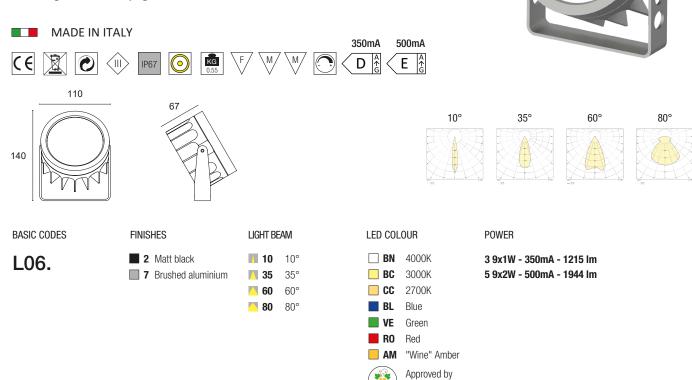

## Code example:

ZEPPELIN + Matt black + Light beam  $10^{\circ}$  + 3000K + 9W = Code: L06.210BC3

92 www.nanoledlighting.com

CIVC