

INCASSI INTERNI

INDOOR RECESSED LIGHT

• IRIDE W	26
• ZEFIRO W	26
• EOS W	27
• EOS Q W	27
• IRIDE	28
• ZEFIRO	28
• EOS.....	29
• EOS Q	29
• VESTA.....	30
• MINI VESTA	31
• VESTA PLAFONE.....	32
• EOS PLAFONE.....	33
• TICHE.....	34
• TICHE Q	34
• MAXI TICHE.....	35
• TICHE PLAFONE	36
• TICHE Q PLAFONE	36
• ELETTRA.....	37
• ELETTRA Q	37
• ELETTRA PLAFONE.....	38
• ELETTRA Q PLAFONE	38
• GIORDAN LD	39
• GIORDAN LD PLAFONE....	39
• MICROLED.....	40
• MICROLED PLAFONE.....	40
• VALLY	41
• LITE PAD PIR	42
• REMOVE MINUS	44
• REMOVE PLUS.....	45
• ERMA	46
• PAD.....	47
• EGO METAL COB.....	48
• EGO METAL Q COB	48
• BASIK 1	49
• BASIK Q.....	49
• BIONIK 1	50
• BIONIK Q	50
• FOUR HOLE	51
• FOUR HOLE Q	51
• ONE HOLE	52
• SIMPLE.....	53
• SIMPLE Q	53
• SIMPLE M.....	54
• SIMPLE M Q	54
• SIMPLE W	55
• SIMPLE CCT	56
• SIMPLE Q CCT	56
• SIMPLE M CCT	57
• SIMPLE Q M CCT.....	57

IRIDE-W

L9912.

Incasso in termoplastico stampato con LED WICOP.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.

- Montaggio a pressione.
- Diffusione full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 50
- Molle incluse

COLLEGARE IN PARALLELO

*Thermoplastic printed recessed spot with WICOP LED.
It is suitable as accent lighting, as decoration or as curtesy light.
It can be installed on indoor locations.*

- Pressure assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 50
- Springs included

CONNECT IN PARALLEL



ZEFIRO-W

L9812.

Incasso in termoplastico stampato con LED WICOP.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.

- Montaggio a pressione.
- Diffusione full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 50
- Molle incluse

COLLEGARE IN PARALLELO

*Thermoplastic printed recessed spot with WICOP LED.
It is suitable as accent lighting, as decoration or as curtesy light.
It can be installed on indoor locations.*


- Pressure assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 50
- Springs included

CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS


L9912.



L9812.



ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258

CODICI BASE / BASE CODES

L9912.

L9812.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 3 Oro satinato / Satin gold
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum
- 8 Trasparente / Transparent
- 9 Oro lucido / Polish gold

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

2W - 12Vdc - 216 lm

Esempio di codifica: Prodotto IRIDE W + Finitura bianco + Colore led 3000°K = Codice: **L9912.1BC**
Example of codification: Product IRIDE W + Finishing white + Led color 3000°K = Code: L9912.1BC

EOS-W

L9512.

Incasso in termoplastico stampato con LED WICOP.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.

- Montaggio a pressione.
- Diffusione full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 50
- Molle incluse

COLLEGARE IN PARALLELO

*Thermoplastic printed recessed spot with WICOP LED.
It is suitable as accent lighting, as decoration or as curtesy light.
It can be installed on indoor locations.*

- Pressure assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 50
- Springs included

CONNECT IN PARALLEL



EOS Q-W

L9Q12.

Incasso in termoplastico stampato con LED WICOP.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.

- Montaggio a pressione.
- Diffusione full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 50
- Molle incluse

COLLEGARE IN PARALLELO

*Thermoplastic printed recessed spot with WICOP LED.
It is suitable as accent lighting, as decoration or as curtesy light.
It can be installed on indoor locations.*


- Pressure assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 50
- Springs included

CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS


L9512.



L9Q12.



ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258

CODICI BASE / BASE CODES

L9512. L9Q12.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 3 Oro satinato / Satin gold
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum
- 8 Trasparente / Transparent
- 9 Oro lucido / Polish gold

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

2W - 12Vdc - 216 lm

Esempio di codifica: Prodotto EOS W + Finitura bianco + Colore led 3000°K = Codice: L9912.1BC
Example of codification: Product EOS W + Finishing white + Led color 3000°K = Code: L9912.1BC

Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.

- Montaggio a pressione.
- Alimentazione: 350/500mA
- Cavo: cm. 150 + PLUG
- Molle incluse

COLLEGARE IN SERIE

*Thermoplastic printed recessed spot with POWER LED.
It is suitable as accent lighting, as decoration or as courtesy light.
It can be installed on indoor locations.*

- Pressure assembly.
 - Power supply: 350/500mA
 - Cable: cm. 150 + PLUG
 - Springs included
- CONNECT IN SERIES



ZEFIRO

L98.


Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.

- Montaggio a pressione.
- Alimentazione: 350/500mA
- Cavo: cm. 150 + PLUG
- Molle incluse


COLLEGARE IN SERIE

*Thermoplastic printed recessed spot with POWER LED.
It is suitable as accent lighting, as decoration or as courtesy light.
It can be installed on indoor locations.*


- Pressure assembly.
 - Power supply: 350/500mA
 - Cable: cm. 150 + PLUG
 - Springs included
- CONNECT IN SERIES




DIMENSIONI / DIMENSIONS

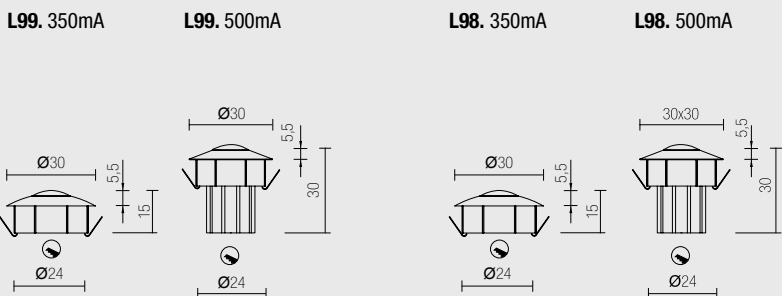

ACCESSORI / ACCESSORIES



Sistema di connessione rapida pag. 270
Quick connection system page 270



Alimentatori pag. 262-263
Drivers page 262-263

CODICI BASE / BASE CODES	FINITURE / FINISHINGS	FASCIO LUCE / LIGHT BEAM	COLORE LED / LED COLOR	POTENZA / POWER
L99.	<input type="checkbox"/> 1 Bianco / White	<input checked="" type="checkbox"/> 30 30°	<input type="checkbox"/> BN 4000°K	3 1x1W - 350mA - 94 lm
L98.	<input type="checkbox"/> 2 Nero / Black		<input type="checkbox"/> BC 3000°K	5 1x2W - 500mA - 131 lm
	<input type="checkbox"/> 3 Oro satinato / Satin gold		<input type="checkbox"/> BL Blu / Blue	
	<input type="checkbox"/> 6 Cromo / Chrome		<input type="checkbox"/> VE Verde / Green	
	<input type="checkbox"/> 7 Alluminio satinato / Satin aluminum		<input type="checkbox"/> RO Rosso / Red	
	<input type="checkbox"/> 8 Trasparente / Transparent		<input type="checkbox"/> AM Ambra / Amber	
	<input type="checkbox"/> 9 Oro lucido / Polish gold			

Esempio di codifica: Prodotto IRIDE + Finitura bianco + Fascio luce 30° + Colore led 3000°K + Potenza 1x1W 350mA = **Codice: L99.130BC3**
Example of codification: Product IRIDE + Finishing white + Light beam 30° + Led color 3000°K + Power 1X1W 350mA = Code: L99.130BC3

Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.

- Montaggio a pressione.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 150 + PLUG
- Molle incluse

COLLEGARE IN SERIE

*Thermoplastic printed recessed spot with POWER LED.
It is suitable as accent lighting, as decoration or as courtesy light.
It can be installed on indoor locations.*

- Pressure assembly.
- Choice of secondary optic.
- Power supply: 350/500mA
- Cable: cm. 150 + PLUG
- Springs included

CONNECT IN SERIES



EOS Q

L9Q.

Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.
Installabile in ambienti interni.


- Montaggio a pressione.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 150 + PLUG
- Molle incluse

COLLEGARE IN SERIE

*Thermoplastic printed recessed spot with POWER LED.
It is suitable as accent lighting, as decoration or as courtesy light.
It can be installed on indoor locations.*

- Pressure assembly.
- Choice of secondary optic.
- Power supply: 350/500mA
- Cable: cm. 150 + PLUG
- Springs included

CONNECT IN SERIES



DIMENSIONI / DIMENSIONS



ACCESSORI / ACCESSORIES

L95. 350mA


L95. 500mA

L9Q. 350mA

L9Q. 500mA

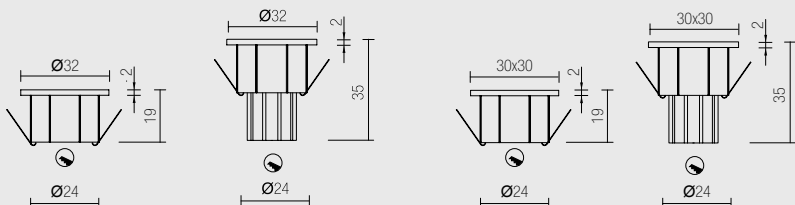

Sistema di connessione rapida pag. 270
Quick connection system page 270



Alimentatori pag. 262-263
Drivers page 262-263

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L95.
L9Q.

- 1 Bianco / White
- 2 Nero / Black
- 3 Oro satinato / Satin gold
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminium
- 8 Trasparente / Transparent
- 9 Oro lucido / Polish gold

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°
- EL Ellittica
Elliptical 25°x45°

- BN 4000°K
- BC 3000°K
- CC 2700°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

- 3 1x1W - 350mA - 94 lm
- 5 1x2W - 500mA - 131 lm

Esempio di codifica: Prodotto EOS + Finitura alluminio + Fascio luce 15° + Colore led 3000°K + Potenza 1x1W 350mA = Codice: L95.715BC3
Example of codification: Product EOS + Finishing aluminium + Light beam 15°+ Led color 3000°K +Power 1X1W 350mA = Code: L95.715BC3

Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.

Installabile in ambienti interni.

- Montaggio a pressione.
- Alimentazione: 350/500mA
- Cavo: cm. 150 + PLUG
- Molle incluse

COLLEGARE IN SERIE

*Thermoplastic printed recessed spot with POWER LED.
It is suitable as accent lighting, as decoration or as courtesy light. It can be installed on indoor locations.*

- Pressure assembly.
- Power supply: 350/500mA
- Cable: cm. 150 + PLUG
- Springs included


CONNECT IN SERIES




DIMENSIONI / DIMENSIONS

VESTA


L97. 350mA




L97. 500mA



ACCESSORI / ACCESSORIES



Sistema di connessione rapida pag. 270
Quick connection system page 270



Alimentatori pag. 262-263
Drivers page 262-263

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L97.

- 1 Bianco / White
- 2 Nero / Black
- 3 Oro satinato / Satin gold
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum
- 8 Trasparente / Transparent
- 9 Oro lucido / Polish gold

00 120°

- BN 4000°K
- BC 3000°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

3 1x1W - 350mA - 94 lm
5 1x2W - 500mA - 131 lm

Esempio di codifica: Prodotto VESTA + Finitura cromo + Fascio luce 120° + Colore led blu + Potenza 1x1W 350mA = Codice: **L97.600BL3**
Example of codification: Product VESTA + Finishing chrome + Light beam 120° + Led color blue + Power 1X1W 350mA = Code: L97.600BL3

MINI VESTA

L9X.

Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.

Installabile in ambienti interni.

- Montaggio a pressione.
- Alimentazione: 350/500mA
- Cavo: cm. 150 + PLUG
- Molle incluse

COLLEGARE IN SERIE


Thermoplastic printed recessed spot with POWER LED.

It is suitable as accent lighting, as decoration or as courtesy light.

It can be installed on indoor locations.

- *Pressure assembly.*
- *Power supply: 350/500mA*
- *Cable: cm. 150 + PLUG*
- *Springs included*


CONNECT IN SERIES




DIMENSIONI / DIMENSIONS

MINI VESTA


L9X. 350mA




L9X. 500mA



ACCESSORI / ACCESSORIES



Sistema di connessione rapida pag. 270
Quick connection system page 270



Alimentatori pag. 262-263
Drivers page 262-263

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L9X.

- 1 Bianco / White
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum
- 8 Trasparente / Transparent

00 120°

- BN 4000°K
- BC 3000°K
- CC 2700°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

3 1x1W - 350mA - 141 lm
5 1x2W - 500mA - 176 lm

Esempio di codifica: Prodotto MINI VESTA + Finitura bianco + Fascio luce 120° + Colore led 3000°K + Potenza 1x1W 350mA = **Codice: L9X.100BC3**
Example of codification: Product MINI VESTA + Finishing white + Light beam 120° + Led color 3000°K + Power 1X1W 350mA = Code: L9X.100BC3

VESTA PLAFONE

L97D.

Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.

- Installabile in ambienti interni.
- Montaggio a pressione.
- Alimentazione: 350mA
- Cavo: cm. 150 + PLUG

COLLEGARE IN SERIE

Thermoplastic printed recessed spot with POWER LED.

It is suitable as accent lighting, as decoration or as courtesy light


It can be installed on indoor locations.

- Pressure assembly.
- Power supply: 350mA
- Cable: cm. 150 + PLUG


CONNECT IN SERIES




DIMENSIONI / DIMENSIONS



ACCESSORI / ACCESSORIES



Sistema di connessione rapida pag. 270
Quick connection system page 270



Alimentatori pag. 262
Drivers page 262

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L97D.

- 1 Bianco / White
- 2 Nero / Black
- 3 Oro satinato / Satin gold
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum
- 8 Trasparente / Transparent
- 9 Oro lucido / Polish gold

00 120°

- BN 4000°K
- BC 3000°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

1x1W - 350mA - 94 lm

Esempio di codifica: Prodotto VESTA PLAFONE + Finitura alluminio + Fascio luce 120° + Colore 3000°K = Codice: L97D.700BC

Example of codification: Product VESTA PLAFONE + Finishing aluminium + Light beam 120° + Led color 3000°K = Code: L97D.700BC

EOS PLAFONE

L95D.

Incasso in termoplastico stampato con POWER LED.
Indicato come illuminazione d'accento, decorazione o cortesia.

- Installabile in ambienti interni.
- Montaggio a pressione.
- Alimentazione: 350mA
- Cavo: cm. 150 + PLUG


COLLEGARE IN SERIE

Thermoplastic printed recessed spot with POWER LED.


It is suitable as accent lighting, as decoration or as courtesy light.

- *It can be installed on indoor locations.*
- *Pressure assembly.*
- *Power supply: 350mA*
- *Cable: cm. 150 + PLUG*


CONNECT IN SERIES




DIMENSIONI / DIMENSIONS



ACCESSORI / ACCESSORIES



Sistema di connessione rapida pag. 270
Quick connection system page 270



Alimentatori pag. 262
Drivers page 262

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L95D.

- 1 Bianco / White
- 2 Nero / Black
- 3 Oro satinato / Satin gold
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum
- 8 Trasparente / Transparent
- 9 Oro lucido / Polish gold

- 15 15°
- 25 25°
- 40 40°
- 60 60°
- 80 80°

- BN 4000°K
- BC 3000°K
- CC 2700°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

1x1W - 350mA - 94 lm

Esempio di codifica: Prodotto EOS PLAFONE + Finitura alluminio + Fascio luce 25° + Colore led rosso = Codice: L95D.725RO
Example of codification: Product EOS PLAFONE + Finishing aluminium + Light beam 25° + Led color red = Code: L95D.725RO

L15.

Incasso in alluminio tornito con MID-POWER LED.
Indicato come illuminazione primaria per piccoli ambienti, di complemento o per arredi.

- Installabile in ambienti interni.
- Montaggio con molla.
- Diffusione Full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 150 + PLUG

COLLEGARE IN PARALLELO

Turned aluminium recessed spot with MID-POWER LED.

It is suitable as main lighting for small locations, as complement or as furnishings lighting.

- *It can be installed on indoor locations.*
- *Spring assembly.*
- *Full light diffusion.*
- *Power supply: 12Vdc*
- *Cable: cm. 150 + PLUG*

CONNECT IN PARALLEL



TICHE Q

L15Q.

Incasso in alluminio tornito con MID-POWER LED.
Indicato come illuminazione primaria per piccoli ambienti, di complemento o per arredi. Installabile in ambienti interni.

- Montaggio con molla.
- Diffusione Full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 150 + PLUG

COLLEGARE IN PARALLELO

Turned aluminium recessed spot with MID-POWER LED.

It is suitable as main lighting for small locations, as complement or as furnishings lighting. It can be installed on indoor locations.


- *Spring assembly.*
- *Full light diffusion.*
- *Power supply: 12Vdc*
- *Cable: cm. 150 + PLUG*

CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS


L15.

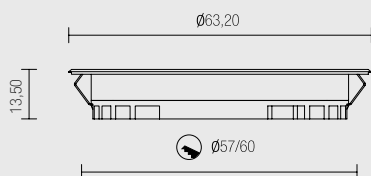


L15Q.

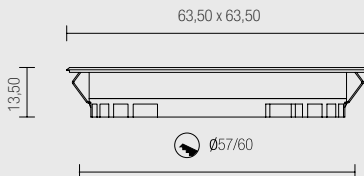

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258



Sistema di connessione rapida pag. 271
Quick connection system page 271

CODICI BASE / BASE CODES

L15.
L15Q.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 4 Bronzo / Bronze
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo lucido / Polish chrome
- 7 Alluminio satinato / Satin aluminum
- 9 Oro lucido / Polish gold

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

3W - 12Vdc - 324 lm

Esempio di codifica: Prodotto TICHE + Finitura alluminio + Colore 3000°K = Codice: L15.7BC

Example of codification: Product TICHE + Finishing aluminium + Led color 3000°K = Code: L15.7BC

MAXI TICHE

L15M.

Incasso in alluminio tornito con MID-POWER LED.
Indicato come illuminazione primaria per ambienti residenziali e retail. Installabile in ambienti interni.

- Montaggio con molla.
- Diffusione Full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 50

COLLEGARE IN PARALLELO


*Turned aluminium recessed spot with MID-POWER LED.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*

- Spring assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 50


CONNECT IN PARALLEL



DIMENSIONI / DIMENSIONS

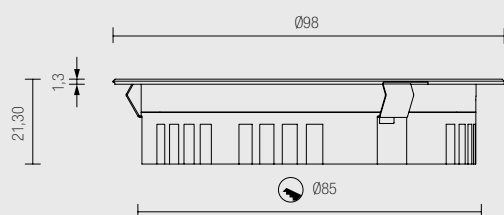

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258

CODICI BASE / BASE CODES

L15M.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

9W - 12Vdc - 945 lm

Esempio di codifica: Prodotto MAXI TICHE + Finitura alluminio + Colore led 3000°K = Codice: L15M.7BC
Example of codification: Product MAXI TICHE + Finishing aluminium + Led color 3000°K = Code: L15M.7BC

TICHE PLAFONE

L15D.

Plafone in alluminio tornito con MID-POWER LED.
Indicato come illuminazione primaria per piccoli ambienti,
di complemento o per arredi. Installabile in ambienti interni.

- Montaggio con viti a scomparsa.
- Diffusione Full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 150 + PLUG

COLLEGARE IN PARALLELO

*Turned aluminium recessed spot with MID-POWER LED.
It is suitable as main lighting for small locations, as complement or
as furnishings lighting. It can be installed on indoor locations.*

- Hidden springs assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 150 + PLUG

CONNECT IN PARALLEL



TICHE Q PLAFONE

L15QD.

Plafone in alluminio tornito con MID-POWER LED.
Indicato come illuminazione primaria per piccoli ambienti,
di complemento o per arredi. Installabile in ambienti interni.

- Montaggio con viti a scomparsa.
- Diffusione Full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 150 + PLUG

COLLEGARE IN PARALLELO

*Turned aluminium recessed spot with MID-POWER LED.
It is suitable as main lighting for small locations, as complement or
as furnishings lighting. It can be installed on indoor locations.*

- Hidden springs assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 150 + PLUG


CONNECT IN PARALLEL





DIMENSIONI / DIMENSIONS

ACCESSORI / ACCESSORIES


L15D.

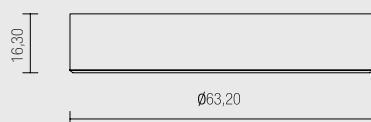

L15QD.

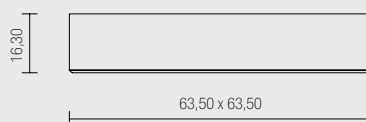

Alimentatori pag. 258
Drivers page 258



Sistema di connessione rapida pag. 271
Quick connection system page 271

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

COLORE LED / LED COLOR

POTENZA / POWER

L15D.

L15QD.

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 7 Alluminio satinato / Satin aluminum

- BN 4000°K
- BC 3000°K
- CC 2700°K

3W - 12Vdc - 324 lm

Esempio di codifica: Prodotto TICHE Q + Finitura bianco + Colore 3000°K = Codice: **L15Q.1BC**
Example of codification: Product TICHE Q + Finishing white + Led color 3000°K = Code: L15Q.1BC

Incasso in alluminio tornito con MID-POWER LED ad alimentazione diretta. Indicato come illuminazione primaria per ambienti residenziali e retail. Installabile in ambienti interni.

- Montaggio con molla.
- Diffusione Full Light.
- Alimentazione: 220V
- Cavo: cm. 30
- COLLEGARE IN PARALLELO

Turned aluminium recessed spot with direct power supply MID-POWER LED.

It is suitable as main lighting for residential areas and retails.

It can be installed on indoor locations.

- Spring assembly.
- Full light diffusion.
- Power supply: 220V
- Cable: cm. 30

CONNECT IN PARALLEL



ELETTRA Q

L18Q.

Incasso in alluminio tornito con MID-POWER LED ad alimentazione diretta.

Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni.

- Montaggio con molla.
- Diffusione Full Light.
- Alimentazione: 220V
- Cavo: cm. 30

COLLEGARE IN PARALLELO

Turned aluminium recessed spot with direct power supply MID-POWER LED.

It is suitable as main lighting for residential areas and retails. It can be installed on indoor locations.


- Spring assembly.
- Full light diffusion.
- Power supply: 220V
- Cable: cm. 30

CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS

L18.

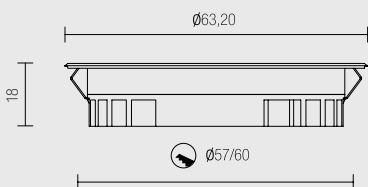

L18Q.

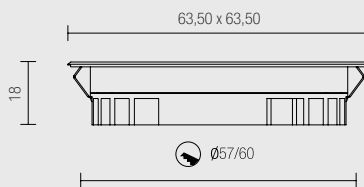

CODICI BASE / BASE CODES	FINITURE / FINISHINGS	COLORE LED / LED COLOR	POTENZA / POWER
L18.	<input type="checkbox"/> 1 Bianco / White	<input type="checkbox"/> BN 4000°K	4,5W - 220 Vac - 375 lm
	<input type="checkbox"/> 2 Nero / Black	<input type="checkbox"/> BC 3000°K	
L18Q.	<input type="checkbox"/> 4 Bronzo / Bronze		
	<input type="checkbox"/> 5 Alluminio brillante / Bright aluminum		
	<input type="checkbox"/> 6 Cromo lucido / Polish chrome		
	<input type="checkbox"/> 7 Alluminio satinato / Satin aluminum		
	<input type="checkbox"/> 9 Oro lucido / Polish gold		

Esempio di codifica: Prodotto ELETTRA + Finitura alluminio + Colore 3000°K = Codice: L18.7BC

Example of codification: Product ELETTRA + Finishing aluminium + Led color 3000°K = Code: L18.7BC

ELETTRA PLAFONE

L18D.

Plafone in alluminio tornito con MID-POWER LED ad alimentazione diretta.

Indicato come illuminazione primaria per ambienti residenziali e retail. Installabile in ambienti interni.

- Montaggio con viti a scomparsa.
- Diffusione Full Light.
- Alimentazione: 220V
- Cavo: cm. 30

COLLEGARE IN PARALLELO

Turned aluminium recessed spot with direct power supply MID-POWER LED.

It is suitable as main lighting for residential areas and retails.

It can be installed on indoor locations.

- *Hidden springs assembly.*
- *Full light diffusion.*
- *Power supply: 220V*
- *Cable: cm. 30*

CONNECT IN PARALLEL



ELETTRA Q PLAFONE

L18QD.

Plafone in alluminio tornito con MID-POWER LED ad alimentazione diretta. Indicato come illuminazione primaria per ambienti residenziali e retail. Installabile in ambienti interni.

- Montaggio con viti a scomparsa.
- Diffusione Full Light.
- Alimentazione: 220V
- Cavo: cm. 30

COLLEGARE IN PARALLELO

Turned aluminium recessed spot with direct power supply MID-POWER LED. It is suitable as main lighting for residential areas and retails. It can be installed on indoor locations.

It can be installed on indoor locations.


- *Hidden springs assembly.*
- *Full light diffusion.*
- *Power supply: 220V*
- *Cable: cm. 30*

CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS

L18D.



L18QD.

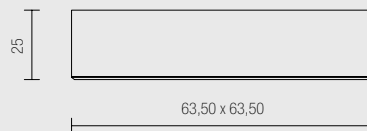

CODICI BASE / BASE CODES	FINITURE / FINISHINGS	COLORE LED / LED COLOR	POTENZA / POWER
L18D.	<input type="checkbox"/> 1 Bianco / White	<input type="checkbox"/> BN 4000°K	4,5W - 220 Vdc 375 lm
L18QD.	<input checked="" type="checkbox"/> 2 Nero / Black	<input checked="" type="checkbox"/> BC 3000°K	
	<input type="checkbox"/> 5 Alluminio brillante / Bright aluminum		
	<input type="checkbox"/> 7 Alluminio satinato / Satin aluminum		

Esempio di codifica: Prodotto ELETTRA PLAFONE + Finitura alluminio + Colore 3000°K = Codice: **L18D.7BC**

Example of codification: Product ELETTRA PLAFONE + Finishing aluminium + Led color 3000°K = Code: L18D.7BC

GIORDAN LD

F01LD.

Incasso in termoplastico stampato con MID-POWER LED.
Indicato come illuminazione primaria per piccoli ambienti,
di complemento e per arredi. Installabile in ambienti interni.

- Montaggio con molla.
- Diffusione Full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 150 + PLUG

COLLEGARE IN PARALLELO

*Turned aluminium printed recessed spot with MID-POWER LED.
It is suitable as main lighting for small locations, as complement
or as furnishings lighting. It can be installed on indoor locations.*

- Spring assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 150 + PLUG

CONNECT IN PARALLEL



GIORDAN LD PLAFONE

F01LDD.

Plafone in termoplastico stampato con MID-POWER LED.
Indicato come illuminazione primaria per piccoli ambienti,
di complemento e per arredi. Installabile in ambienti interni.

- Montaggio con viti a scomparsa.
- Diffusione Full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 150 + PLUG

COLLEGARE IN PARALLELO

*Printed Thermoplastic ceiling spot with MID-POWER LED.
It is suitable as main lighting for small locations, as complement
or as furnishings lighting. It can be installed on indoor locations.*


- Hidden springs assembly.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 150 + PLUG

CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS


F01LD.

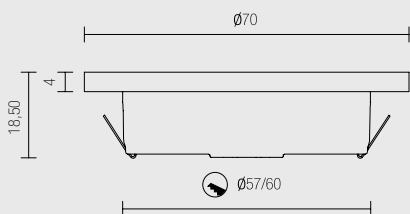


F01LDD.

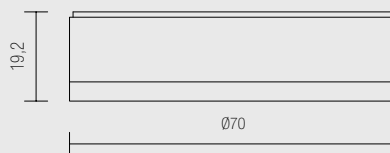

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258



Sistema di connessione rapida pag. 271
Quick connection system page 271

CODICI BASE / BASE CODES

F01LD. F01LDD.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 4 Bronzo / Bronze
- 6 Cromo lucido / Polish chrome
- 7 Alluminio satinato / Satin aluminium
- 9 Oro lucido / Polish gold

VETRO / GLASS

- T Trasparente
Transparent
- O Opalino
Opaline

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

3W - 12 Vdc - 324 lm

Esempio di codifica: Prodotto GIORDAN LD + Finitura alluminio + Vetro trasparente + Colore led 3000°K = Codice: **F01LD.7TBC**
Example of codification: Product GIORDAN LD + Finishing aluminium + Glass transparent + Led Color 3000°K = Code: **F01LD.7TBC**

MICROLED

F03.

Incasso in metallo stampato con LED ad alta luminosità.
Indicato come illuminazione di complemento e per arredi.
Installabile in ambienti interni.

- Montaggio con molla.
 - Alimentazione: 12Vdc
 - Cavo: cm. 150 + PLUG
- COLLEGARE IN PARALLELO

*Printed metal recessed spot with high brightness LED.
It is suitable as complement lighting or as furnishings lighting.
It can be installed on indoor locations.*

- Spring assembly.
 - Power supply: 12Vdc
 - Cable: cm. 150 + PLUG
- CONNECT IN PARALLEL



MICROLED PLAFONE

F03D.

Plafone in metallo stampato con LED ad alta luminosità.
Indicato come illuminazione di complemento e per arredi.
Installabile in ambienti interni.

- Montaggio con viti a scomparsa.
 - Alimentazione: 12Vdc
 - Cavo: cm. 150 + PLUG
- COLLEGARE IN PARALLELO


*Printed metal recessed spot with high brightness LED.
It is suitable as complement lighting or as furnishings lighting.
It can be installed on indoor locations.*

- Hidden springs assembly.
 - Power supply: 12Vdc
 - Cable: cm. 150 + PLUG
- CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS


F03.

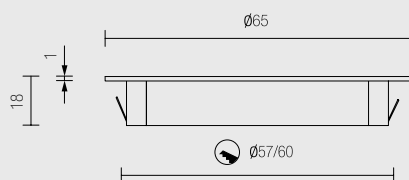


F03D.

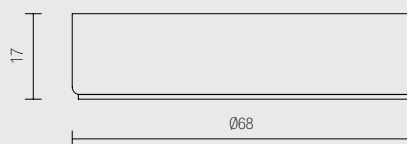

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258



Sistema di connessione rapida pag. 271
Quick connection system page 271

CODICI BASE / BASE CODES

F03.
F03D.

FINITURE / FINISHINGS

- 6 Cromo lucido / Polish chrome
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BF 5000°K
- BC 3000°K

POTENZA / POWER

1,7W - 12 Vdc - 140lm

Esempio di codifica: Prodotto MICROLED + Finitura cromo + Colore led 5000°K = Codice: **F03.6BF**
Example of codification: Product MICROLED + Finishing polish chrome + Led color 5000°K = Code: F03.6BF

VALLY


F02LD.

Incasso in metallo stampato con MID-POWER LED.
Indicato come illuminazione di complemento e per arredi.
Installabile in ambienti interni.


- Montaggio con molla.
 - Diffusione full Light.
 - Alimentazione: 12Vdc
 - Cavo: cm. 150 + PLUG
- COLLEGARE IN PARALLELO

*Recessed metal printed spot with MID-POWER LED.
It is suitable as complement lighting or as furnishings lighting.
It can be installed on indoor locations.*


- Spring assembly.
 - Full light diffusion.
 - Power supply: 12Vdc
 - Cable: cm. 150 + PLUG
- CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS

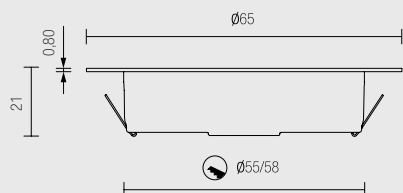

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258



Sistema di connessione rapida pag. 271
Quick connection system page 271

CODICI BASE / BASE CODES

F02LD.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 4 Bronzo / Bronze
- 6 Cromo lucido / Polish chrome
- 7 Alluminio satinato / Satin aluminum
- 9 Oro lucido / Polish gold

VETRO / GLASS

- 0 Opalino
Opaline

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

3W - 12 Vdc - 324 lm

Esempio di codifica: Prodotto VALLY LD + Finitura alluminio + Vetro opalino + Colore led 4000°K = Codice: **F02LD.70BN**
Example of codification: Product VALLY LD + Finishing aluminium + Glass opaline + Led color 4000°K = Code: **F02LD.70BN**

LITE PAD PIR

PAD.

Plafone stampato in termoplastico con LED ad alta luminosità. Indicato come illuminazione di complemento e per arredi. Dotato di sensore di movimento PIR, accende automaticamente il dispositivo appena rileva un movimento.

Installabile in ambienti interni.

- Montaggio con viti.
 - Diffusione Full-Light.
 - Alimentazione: 12Vdc
 - Cavo: cm. 150 + PLUG
- COLLEGARE IN PARALLELO

Printed thermoplastic ceiling spot with high intensity LED. It is suitable as complement lighting or as furnishings lighting. Equipped with a PIR motion sensor, it turns on automatically the device just detects a movement.


It can be installed on indoor or outdoor locations.

- Spring assembly.
- Full-light diffusion.
- Power supply: 12Vdc
- Cable: cm. 150 + PLUG


CONNECT IN PARALLEL



DIMENSIONI / DIMENSIONS

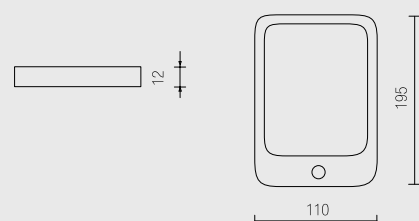

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258

CODICI BASE / BASE CODES

PAD.

FINITURE / FINISHINGS

- 1 Bianco / White
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BN 4000°K

POTENZA / POWER

4,5W - 12Vdc - 220 lm

Esempio di codifica: Prodotto PAD + Finitura alluminio + Colore led 4000°K = Codice: **PAD.7BN**
Example of codification: Product PAD + Finishing aluminium + Led color 4000°K = Code: **PAD.7BN**



REMOVE MINUS

L15S.

Incasso in alluminio tornito con LED ad alta luminosità. Indicato come illuminazione di complemento e servizio o emergenza. Installabile in ambienti interni.

- Montaggio con molla su cassaforma.
- Diffusione full light.
- Alimentazione: 24Vdc
- Cavo: cm. 50

COLLEGARE IN PARALLELO

Turned aluminium recessed spot with high brightness LED. It is suitable as complement and service lighting or as emergency lighting.


It can be installed in indoor locations.

- *Assembly with spring on outer casing.*
- *Full light diffusion.*
- *Power supply: 24Vdc*
- *Cable: cm. 50*


CONNECT IN PARALLEL




DIMENSIONI / DIMENSIONS

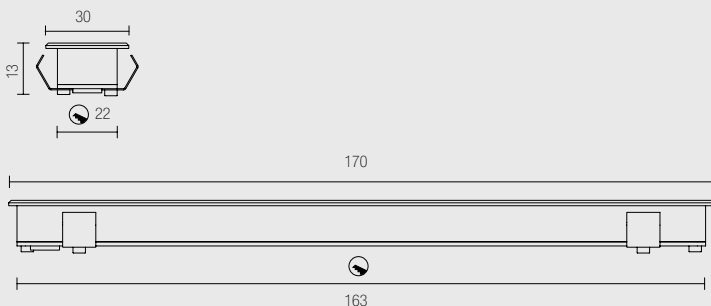

ACCESSORI / ACCESSORIES



Cassaforma cod. 548/23163
Outer Casing code 548/23163



Alimentatori pag. 260
Drivers page 260

CODICI BASE / BASE CODES

L15S.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

1,5W - 24Vdc - 127lm

Esempio di codifica: Prodotto REMOVE MINUS + Finitura alluminio + Colore led 3000°K = Codice: **L15S.7BC**
Example of codification: Product REMOVE MINUS + Finishing aluminium + Led color 3000°K = Code: L15S.7BC

REMOVE PLUS

L15P.

Incasso in alluminio tornito con LED ad alta luminosità. Indicato come illuminazione di complemento e servizio o emergenza. Installabile in ambienti interni ed esterni parzialmente protetti.

- Montaggio con molla su cassaforma.
- Diffusione full light.
- Alimentazione: 24Vdc
- Cavo: cm. 50

COLLEGARE IN PARALLELO


Turned aluminium recessed spot with high brightness LED. It is suitable as complement and service lighting or as emergency lighting. It can be installed on indoor locations or on partially protected outdoor locations.

- *Assembly with spring on outer casing.*
- *Full light diffusion.*
- *Power supply: 24Vdc*
- *Cable: cm. 50*


CONNECT IN PARALLEL



DIMENSIONI / DIMENSIONS

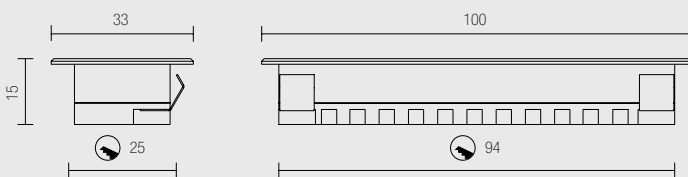

ACCESSORI / ACCESSORIES

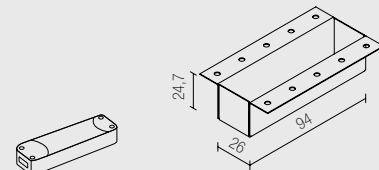

Alimentatori pag. 260
Drivers page 260

Cassaforma cod. 548/2594
Outer Casing code 548/2594

CODICI BASE / BASE CODES

L15P.
L15P.WP

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

4W - 24 Vdc - 236 lm

Esempio di codifica: Prodotto REMOVE PLUS + Finitura alluminio + Colore led 3000°K = Codice: L15P.7BC1
Example of codification: Product REMOVE PLUS + Finishing aluminium + Led color 3000°K = Code: L15P.7BC1

Incasso in termoplastico stampato con MID-POWER LED.
Indicata come illuminazione di cortesia e sicurezza.

Installabile in ambienti interni e compatibile con

cassaforma 503 standard.

- Linea minimal ed elegante.
- Alimentatore incluso.
- Cavo: cm. 30.

COLLEGARE IN PARALLELO

Thermoplastic printed recessed spot with MID-POWER LED.

It is suitable as courtesy or security light.


It can be installed on indoor locations and is compatible with standard 503 outer casing.

- *Minimal and elegant line.*
- *Power supply included.*
- *Cable: cm. 30.*

CONNECT IN PARALLEL



DIMENSIONI / DIMENSIONS

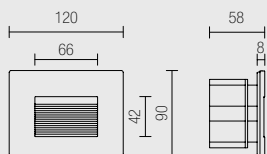

CODICI BASE / BASE CODES

L13.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K

POTENZA / POWER

1,5W - 12Vdc - 100 lm

Esempio di codifica: Prodotto ERMA + Finitura bianco + Colore led 4000°K = Codice: L13.1BN

Example of codification: Product ERMA + Finishing white + Led color 4000°K = Code: L13.1BN

PAD L13Q.

Incasso in alluminio tornito con MID-POWER LED. Indicato come illuminazione primaria per piccoli ambienti, di complemento e servizio o emergenza. Installabile in ambienti interni.


- Montaggio con molla su cassaforma.
- Diffusione full Light.
- Alimentazione: 12Vdc
- Cavo: cm. 50

COLLEGARE IN PARALLELO


*Turned aluminium recessed spot with MID-POWER LED.
It is suitable as main lighting for small locations, as complement and service lighting or as emergency lighting.
It can be installed on indoor locations.*

- Assembly with spring on outer casing.
- Full light diffusion.
- Power supply: 12Vdc
- Cable: cm. 50


CONNECT IN PARALLEL

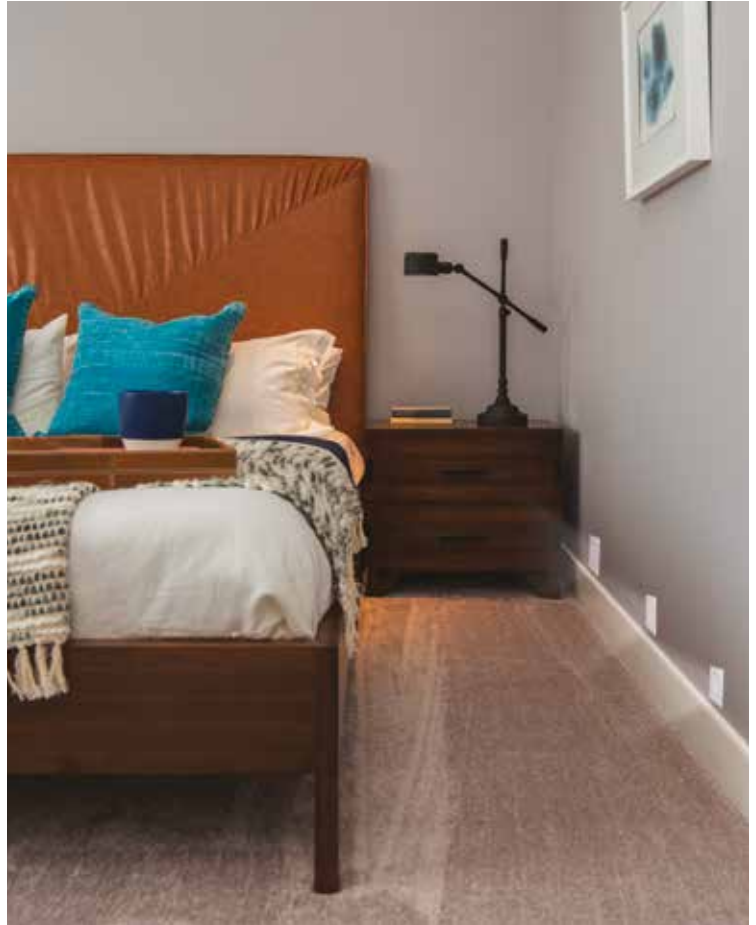


DIMENSIONI / DIMENSIONS

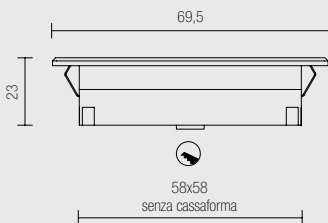

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258



Cassaforma cod. 548/2562
Outer Casing code 548/2562

CODICI BASE / BASE CODES

L13Q.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

3W - 12 Vdc - 324 lm

Esempio di codifica: Prodotto PAD + Finitura bianco + Colore led 3000°K = Codice: PAD.1BC
Example of codification: Product PAD + Finishing white + Led color 3000°K = Code: PAD.1BC

EGO METAL COB

L04.

Incasso orientabile in metallo stampato con COB LED CRI>90. Indicato come illuminazione primaria per ambienti residenziali e retail. Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 200mA
- Cavo: cm. 50

COLLEGARE IN SERIE

Printed metal adjustable recessed spot with COB LED CRI>90. It is suitable as main lighting for residential areas and retails.

It can be installed on indoor locations.

- Spring assembly.
- Choice of secondary optic.
- Power supply: 200mA
- Cable: cm. 50

CONNECT IN SERIES



EGO METAL Q COB

L05.

Incasso orientabile in metallo stampato con COB LED CRI>90. Indicato come illuminazione primaria per ambienti residenziali e retail. Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 200mA
- Cavo: cm. 50

COLLEGARE IN SERIE

Printed metal adjustable recessed spot with COB LED CRI>90. It is suitable as main lighting for residential areas and retails.

It can be installed on indoor locations.



- Spring assembly.
- Choice of secondary optic.
- Power supply: 200mA
- Cable: cm. 50

CONNECT IN SERIES



DIMENSIONI / DIMENSIONS

ACCESSORI / ACCESSORIES

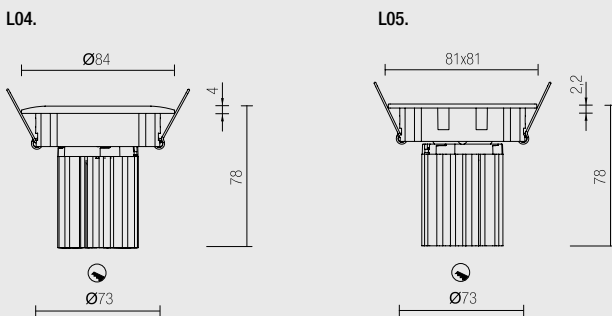

Alimentatori pag. 265
Drivers page 265

CODICI BASE / BASE CODES	FINITURE / FINISHINGS	FASCIO LUCE / LIGHT BEAM	COLORE LED / LED COLOR	POTENZA / POWER
L04.	<input type="checkbox"/> 1 Bianco / White	<input type="checkbox"/> 15 15°	<input type="checkbox"/> BN 4000°K	200mA - 7 W - 916 lm
	<input type="checkbox"/> 2 Nero / Black	<input type="checkbox"/> 31 31°	<input type="checkbox"/> BC 3000°K	
L05.	<input type="checkbox"/> 6 Cromo / Chrome	<input type="checkbox"/> 50 50°	<input type="checkbox"/> CC 2700°K	
	<input type="checkbox"/> 7 Inox / Stainless steel			
	<input type="checkbox"/> 9 Oro lucido / Polish gold			

Esempio di codifica: Prodotto EGO METAL COB + Finitura alluminio + Fascio luce 18° + Colore led 2700°K = Codice: L04.715CC
Example of codification: Product EGO METAL COB + Finishing aluminium + Light beam 18° + Led color 2700°K = Code: L04.715CC

BASIK 1

L01.

Incasso in alluminio tornito con POWER LED.

Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni ed esterni parzialmente protetti.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 50

COLLEGARE IN SERIE

Turned aluminium recessed spot with CREE POWER LED.

It is suitable as main lighting for residential areas and retails.

It can be installed on indoor locations or on partially protected outdoor locations.

- *Spring assembly.*
- *Choice of secondary optic.*
- *Power supply: 350/500mA*
- *Cable: cm. 50*

CONNECT IN SERIES



BASIK Q

L02.

Incasso in alluminio tornito con POWER LED.

Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni ed esterni parzialmente protetti.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 50

COLLEGARE IN SERIE

Turned aluminium recessed spot with POWER LED.

It is suitable as main lighting for residential areas and retails.

It can be installed on indoor locations or on partially protected outdoor locations.

- *Spring assembly.*
- *Choice of secondary optic.*
- *Power supply: 350/500mA*
- *Cable: cm. 50*


CONNECT IN SERIES





DIMENSIONI / DIMENSIONS

ACCESSORI / ACCESSORIES

L01.

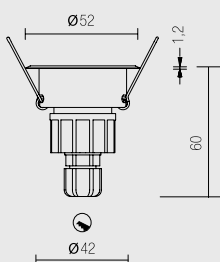

L02.



Alimentatori pag. 262-263
Drivers page 262-263

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L01.

L02.

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

- 15 15°
- 25 25°
- 35 35°

- BN 4000°K
- BC 3000°K
- CC 2700°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

- 3 3x1W - 350mA - 423 lm
- 5 3x2W - 500mA - 528 lm

Esempio di codifica: Prodotto BASIK 1 + Finitura alluminio + Fascio luce 15° + Colore led 3000°K + Potenza 3x1W 350mA = Codice: L01.715BC3
Example of codification: Product BAKIK 1 + Finishing aluminium + Light beam 15° + Led color 3000°K + Power 3x1W 350mA = Code: L01.715BC3

BIONIK 1

L21.

Incasso in alluminio tornito con POWER LED.

Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni ed esterni parzialmente protetti.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 50

COLLEGARE IN SERIE

*Turned aluminium recessed spot with CREE POWER LED.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations or on partially
protected outdoor locations.*

- Spring assembly.
- Choice of secondary optic.
- Power supply: 350/500mA
- Cable: cm. 50

CONNECT IN SERIES



BIONIK Q

L22.

Incasso in alluminio tornito con POWER LED.

Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni ed esterni parzialmente protetti.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 50

COLLEGARE IN SERIE

*Turned aluminium recessed spot with POWER LED.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations or on partially
protected outdoor locations.*


- Spring assembly.
- Choice of secondary optic.
- Power supply: 350/500mA
- Cable: cm. 50

CONNECT IN SERIES




DIMENSIONI / DIMENSIONS


L21.

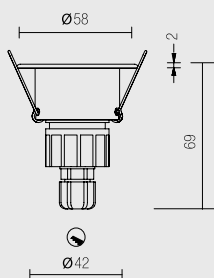

L22.

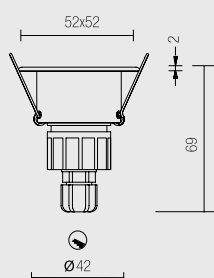

ACCESSORI / ACCESSORIES



Alimentatori pag. 262-263
Drivers page 262-263

CODICI BASE / BASE CODES

L21.
L22.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

FASCIO LUCE / LIGHT BEAM

- 15 15°
- 25 25°
- 35 35°

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

POTENZA / POWER

- 3 3x1W - 350mA - 423 lm
- 5 3x2W - 500mA - 528 lm

Esempio di codifica: Prodotto BIONIK 1 + Finitura alluminio + Fascio luce 15° + Colore led 3000°K + Potenza 3x1W 350mA = Codice: L21.715BC3
Example of codification: Product BIONIK 1 + Finishing aluminium + Light beam 15° + Led color 3000°K + Power 3x1W 350mA = Code: L21.715BC3

FOUR HOLE

L24.

Incasso in alluminio tornito con POWER LED.

Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni ed esterni parzialmente protetti.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 50

COLLEGARE IN SERIE

*Turned aluminium recessed spot with CREE POWER LED.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations or on partially protected outdoor locations.*

- Spring assembly.
- Choice of secondary optic.
- Power supply: 350/500mA
- Cable: cm. 50

CONNECT IN SERIES



FOUR HOLE Q

L25.

Incasso in alluminio tornito con POWER LED.

Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni ed esterni parzialmente protetti.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350/500mA
- Cavo: cm. 50

COLLEGARE IN SERIE

*Turned aluminium recessed spot with CREE POWER LED.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations or on partially protected outdoor locations.*


- Spring assembly.
- Choice of secondary optic.
- Power supply: 350/500mA
- Cable: cm. 50

CONNECT IN SERIES




DIMENSIONI / DIMENSIONS


L24.

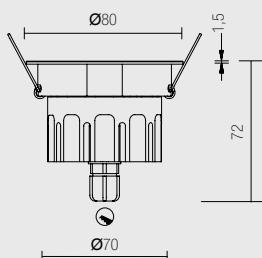

L25.

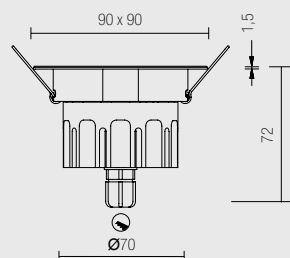

ACCESSORI / ACCESSORIES



Alimentatori pag. 262-263
Drivers page 262-263

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L24.

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

- 10 10°
- 35 35°
- 60 60°
- 80 80°

- BN 4000°K
- BC 3000°K
- CC 2700°K
- BL Blu / Blue
- VE Verde / Green
- RO Rosso / Red
- AM Ambra / Amber

- 3 4x1W - 350mA - 564 lm
- 5 4x2W - 500mA - 704 lm

L25.

Esempio di codifica: Prodotto FOUR HOLE + Finitura bianco + Fascio luce 80° + Colore 3000°K + Potenza 4x1W 350mA = Codice: L24.180BC3
Example of codification: Product FOUR HOLE + Finishing white + Light beam 80° + Led color 3000°K + Power 4x1W 350mA = Code: L24.180BC3

ONE HOLE

L16.

Incasso in alluminio tornito con MID-POWER LED.
Indicato come illuminazione primaria per ambienti residenziali e retail. Installabile in ambienti interni.

- Montaggio con molla.
- Diffusione full light.
- Alimentazione: 12Vdc
- Cavo: cm. 50

COLLEGARE IN PARALLELO


*Turned aluminium recessed spot with MID-POWER LED.
It is suitable as main lighting for residential areas and retails.*

- *It can be installed on indoor locations.*
- *Spring assembly.*
- *Power supply: 12Vdc*
- *Cable: cm. 50*


CONNECT IN PARALLEL



DIMENSIONI / DIMENSIONS

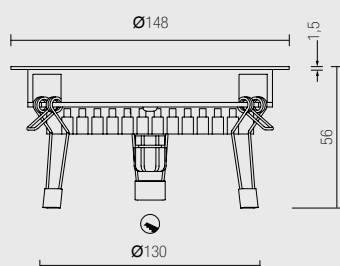

ACCESSORI / ACCESSORIES



Alimentatori pag. 258
Drivers page 258

CODICI BASE / BASE CODES

L16.

FINITURE / FINISHINGS

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

COLORE LED / LED COLOR

- BN 4000°K
- BC 3000°K
- CC 2700°K

POTENZA / POWER

9 W - 12 Vdc - 1080 lm

Esempio di codifica: Prodotto ONE HOLE + Finitura bianco + Colore led 4000°K = Codice: **L16.1BN**
Example of codification: Product ONE HOLE + Finishing white + Led color 4000°K = Code: L16.1BN

SIMPLE

L10.

Incasso in alluminio con COB LED CRI>90.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 200mA
- Cavo: cm. 50

COLLEGARE IN SERIE



*Aluminium recessed spot with COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*

- Spring assembly.
 - Choice of secondary optic.
 - Power supply: 200mA
 - Cable: cm. 50
- CONNECT IN SERIES



SIMPLE Q

L10Q.

Incasso in alluminio con COB LED CRI>90.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 200mA
- Cavo: cm. 50

COLLEGARE IN SERIE





*Aluminium recessed spot with COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*


- Spring assembly.
 - Choice of secondary optic.
 - Power supply: 200mA
 - Cable: cm. 50
- CONNECT IN SERIES



DIMENSIONI / DIMENSIONS

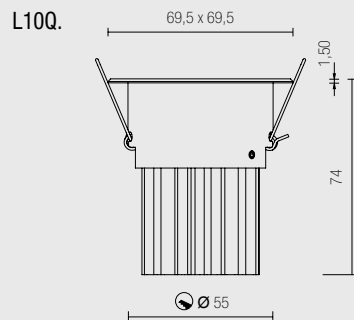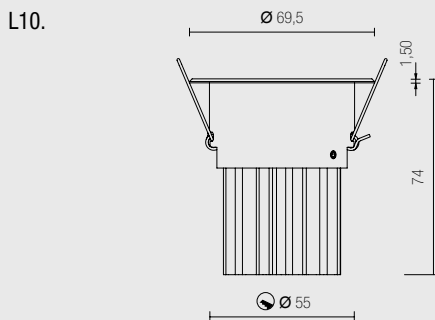

ACCESSORI / ACCESSORIES



Alimentatori pag. 265
Drivers page 265

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L10.
L10Q.

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

- 18 18°
- 28 28°
- 47 47°

- BN 4000°K
- BC 3000°K
- CC 2700°K

200mA - 7 W - 916 lm CRI>90

Esempio di codifica: Prodotto SIMPLE + Finitura bianco + Colore led 4000°K = **Codice: L10.1BN**
Example of codification: Product SIMPLE + Finishing white + Led color 4000°K = Code: L10.1BN

SIMPLE-M

L11.

Incasso in alluminio con COB LED CRI>90.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 250mA
- Cavo: cm. 50

COLLEGARE IN SERIE



*Aluminium recessed spot with COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*

- Spring assembly.
- Choice of secondary optic.
- Power supply: 250mA
- Cable: cm. 50

CONNECT IN SERIES



SIMPLE-M-Q

L11Q.

Incasso in alluminio con COB LED CRI>90.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 250mA
- Cavo: cm. 50

COLLEGARE IN SERIE

*Aluminium recessed spot with COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*




- Spring assembly.
- Choice of secondary optic.
- Power supply: 250mA
- Cable: cm. 50

CONNECT IN SERIES



DIMENSIONI / DIMENSIONS

ACCESSORI / ACCESSORIES

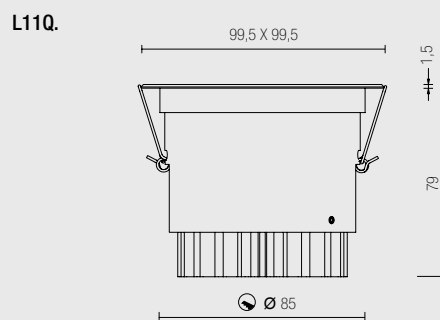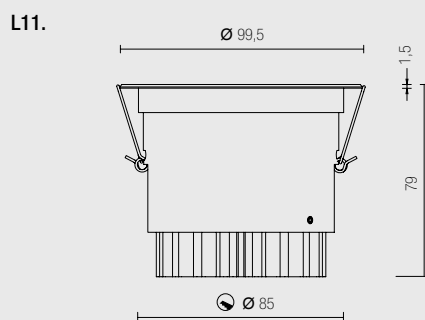

Alimentatori pag. 265
Drivers page 265

CODICI BASE / BASE CODES	FINITURE / FINISHINGS	FASCIO LUCE / LIGHT BEAM	COLORE LED / LED COLOR	POTENZA / POWER
L11.	<input type="checkbox"/> 1 Bianco / White	<input type="checkbox"/> 24 24°	<input type="checkbox"/> BN 4000°K	250mA 9 W - 983 lm - CRI>90
L11Q.	<input type="checkbox"/> 2 Nero / Black	<input type="checkbox"/> 40 40°	<input type="checkbox"/> BC 3000°K	
	<input type="checkbox"/> 5 Alluminio brillante / Bright aluminum	<input type="checkbox"/> 60 60°	<input type="checkbox"/> CC 2700°K	
	<input type="checkbox"/> 6 Cromo / Chrome			
	<input type="checkbox"/> 7 Alluminio satinato / Satin aluminum			

Esempio di codifica: Prodotto SIMPLE M + Finitura bianco + Colore led 4000°K = Codice: **L11.1BN**
Example of codification: Product SIMPLE M + Finishing white + Led color 4000°K = Code: L11.1BN

SIMPLE-W

L12.

Incasso in alluminio con COB LED CRI>90.
Indicato come illuminazione primaria per ambienti residenziali e retail.

Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 450mA
- Cavo: cm. 50

COLLEGARE IN SERIE

Aluminium recessed spot with COB LED CRI>90.

It is suitable as main lighting for residential areas and retails.

It can be installed on indoor locations.


- Spring assembly.
- Choice of secondary optic.
- Power supply: 450mA
- Cable: cm. 50

CONNECT IN SERIES




DIMENSIONI / DIMENSIONS

L12.

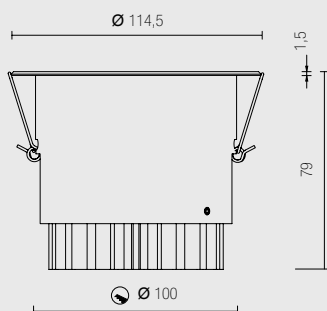

ACCESSORI / ACCESSORIES



Alimentatori pag. 265
Drivers page 265

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L12.

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

- 24 24°
- 40 40°
- 60 60°

- BN 4000°K
- BC 3000°K
- CC 2700°K

450mA-16W-1895 lm CRI>90

Esempio di codifica: Prodotto SIMPLE W + Finitura bianco + Colore led 4000°K = Codice: L12.1BN

Example of codification: Product SIMPLE W + Finishing white + Led color 4000°K = Code: L12.1BN

SIMPLE-CCT

L10CCT.

Incasso in alluminio con COB LED CRI>90 bianco dinamico.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350mA
- Cavo: cm. 50

*Aluminium recessed spot with tunable white COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*

- Spring assembly.
- Choice of secondary optic.
- Remote control and power supply included.
- Power supply: 350mA
- Cable: cm. 50



SIMPLE-Q-CCT

L10QCCT.

Incasso in alluminio con COB LED CRI>90 bianco dinamico.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.


- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350mA
- Cavo: cm. 50

*Aluminium recessed spot with tunable white COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*


- Spring assembly.
- Choice of secondary optic.
- Remote control and power supply included.
- Power supply: 350mA
- Cable: cm. 50




DIMENSIONI / DIMENSIONS

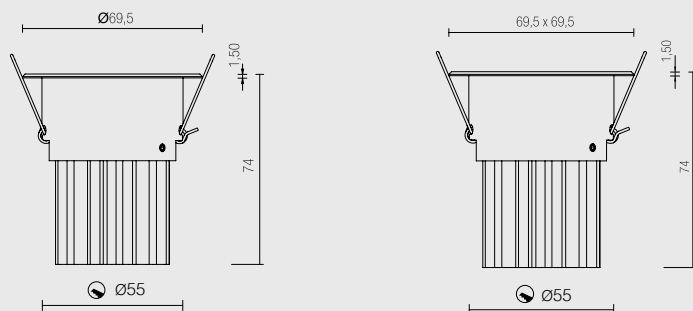


ACCESSORI / ACCESSORIES



Centralina CCT
con comando a pulsante
pag. 284
Tunable with controller
page 284



Centralina CCT
con radiocomando
pag. 279
Tunable with radio remote
controll page 279



Alimentatori pag. 260
Drivers page 260

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L10CCT.

L10QCCT.

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

- 18 18°
- 28 28°
- 47 47°

CCT 2700°K-5000°K

350mA - 13W CRI>90
715 lm medi

Esempio di codifica: Prodotto SIMPLE-CCT + Finitura bianco + Colore LED CCT = Codice: **SIMPLE-CCT.147CCT**

Example of codification: Product SIMPLE-CCT + Finishing white + Led color CCT = Code: **SIMPLE-CCT.147CCT**

SIMPLE-M-CCT

L11CCT.

Incasso in alluminio con COB LED CRI>90 bianco dinamico.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350mA
- Cavo: cm. 50

*Aluminium recessed spot with tunable white COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*

- Spring assembly.
- Choice of secondary optic.
- Remote control and power supply included.
- Power supply: 350mA
- Cable: cm. 50



SIMPLE-Q-M-CCT

L11QCCT.

Incasso in alluminio con COB LED CRI>90 bianco dinamico.
Indicato come illuminazione primaria per ambienti residenziali e retail.
Installabile in ambienti interni.

- Montaggio con molla.
- Ottica secondaria a scelta.
- Alimentazione: 350mA
- Cavo: cm. 50





*Aluminium recessed spot with tunable white COB LED CRI>90.
It is suitable as main lighting for residential areas and retails.
It can be installed on indoor locations.*

- Spring assembly.
- Choice of secondary optic.
- Remote control and power supply included.
- Power supply: 350mA
- Cable: cm. 50



DIMENSIONI / DIMENSIONS

ACCESSORI / ACCESSORIES

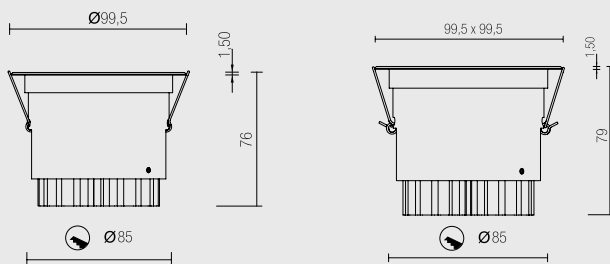

Centralina CCT
con comando a pulsante
pag. 284
Tunable with controller
page 284

Centralina CCT
con radiocomando
pag. 279
Tunable with radio remote
control page 279

Alimentatori pag. 260
Drivers page 260

CODICI BASE / BASE CODES

FINITURE / FINISHINGS

FASCIO LUCE / LIGHT BEAM

COLORE LED / LED COLOR

POTENZA / POWER

L11CCT.
L11QCCT.

- 1 Bianco / White
- 2 Nero / Black
- 5 Alluminio brillante / Bright aluminum
- 6 Cromo / Chrome
- 7 Alluminio satinato / Satin aluminum

- 24 24°
- 40 40°
- 60 60°

CCT 2700°K-5000°K

350mA - 13W CRI>90
715 lm medi

Esempio di codifica: Prodotto SIMPLE-L11CCT + Finitura bianco + Colore LED CCT = Codice: **SIMPLE-L11CCT.147CCT**

Example of codification: Product SIMPLE-L11CCT + Finishing white + Led color CCT = Code: SIMPLE-L11CCT.147CCT

